

Lubrication tools and equipment

LINCOLN



SKF

High-Pressure Portable/Manual Pumps



1296

Filler Pumps—Portable & Stationary


- Fast (less than a minute), positive gun refilling with simple pumping action
- Filler socket assembly eliminates mess, waste and air pockets

Model 1296 Clamp-On Carry

Clamps to any original 25-50 lb. refinery container. Handles medium- and light-pressure lubricants in any weather. Includes pump, filler socket, 274790 flexible follower plate and ribbed steel drum cover. Rust resistant. Tube size 1-1/2".

Model 500L Stationary 120 lb. Drum

For use with original refinery drums with maximum head diameter of 14-9/16" and overall height of 26-5/8". Handles all high-pressure lubricants. Includes pump, filler socket and drum cover with one set of adjusting screws to accommodate variations in drum diameter. Red enamel finish; pump head and handle in black. Delivers 1 oz. per stroke.

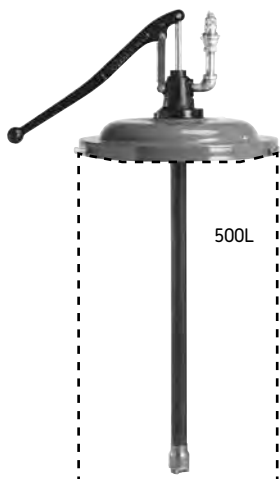

500L

Filler pumps

Model	Container Size	Follower Plate	Filler Socket**	Dimensions
1296	25-50 lb.	274790	274712	20"h x 12-1/4"w
500L	120 lb.	none*	80133	26-5/8" h x 14-9/16" dia.

* For pumping extra heavy lubricants, order follower plate 84780 for 500L pump.

**Requires 91108 filler nipple on receiving tool.



80133

Model 80133 Filler Socket Assembly

Convert guns and pumps for fast, convenient, economical loading. For attaching to filler pumps that are not Lincoln models; 3/8" NPT(f).



91108

Model 91108 Filler Nipple

Enables any grease gun to be loaded using a Lincoln filler pump or any filler pump with a 80133 filler socket assembly.