

# PRODUCT CATALOG

*The Leader in  
Fueling Systems Since 1967*

**WORK FASTER, CLEANER, SAFER**

**Wiggins**  
Systems



# Ultra-High Flow Rate VR300 System

## The VR300 – Fuel at 300 GPM

The VR300 system is also nonpressurized and has a flow capacity of up to 300 gallons per minute. Non-pressurized systems allow operators to use Wiggins high flow fueling systems on vehicles with lightweight or composite fuel tanks.

## Easy to Install

- Can be mounted directly on fuel tank, or in remote location
- Several manufacturers have equipped their vehicles to accept the VR300 mounting

## Fast

- Designed for vehicles with large fuel tanks
- Fuel at rates up to 300 GPM
- Spend less time fueling and more time working

## Clean

- Interlock feature prevents spills from disconnecting nozzle during fueling
- Positive shut off – cannot be overfilled, shut – off cannot be overridden
- Unique cam-lock nozzle attachment assures a leak – proof seal between nozzle and receiver.

## Safe

- Uses same jet sensor technology as JNX
- Nozzle includes full tank indicator display
- Proven reliability – hundreds of units in use world wide


<b>Rated Flow:</b>	10 to 300 GPM
<b>Operating Pressure:</b>	25 to 125 PSIG
<b>Pressure Drop:</b>	7 PSID @ 200 GPM 18 PSID @ 300 GPM
<b>Connect/Disconnect Rotation:</b>	30 Degrees
<b>Disconnect Spillage:</b>	3 cc, Max.
<b>Housing Material:</b>	Aluminum
<b>Weight:</b>	9 LBS



VR325



VR301

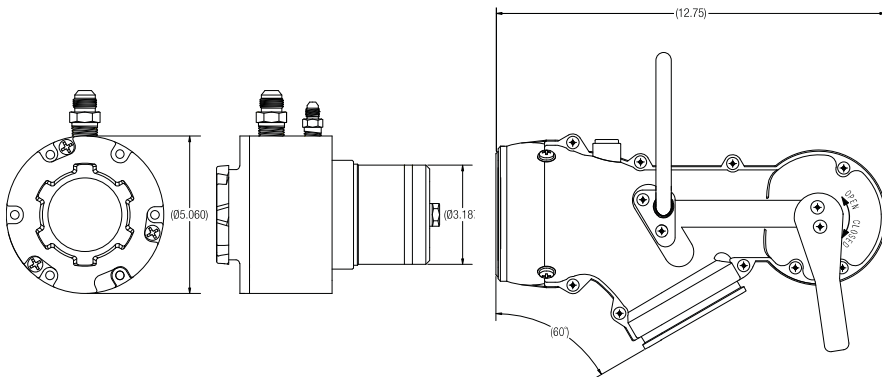

VR321

## Jet Sensor Assembly

Can be mounted on the top or the side of the tank.



VR306