

SKU : RK-C2076T-04



Do not install if you do not have proper mechanic safety equipment and proper tools.

If you need an assistance with your installation, please contact an professional for install.


Features:

- Full T304 Stainless Steel
- Dual 2.5inch piping to dual 3inch 16 gauge, mandrel bent piping
- REMARK signature 4.25inch tip + 4.5inch tip covers x2
- High quality hand welding
- Electronic valve system with factory OEM module
- Dual REMARK proprietary designed mufflers
- Factory OEM hanger rod construction
- Comes standard with REAL TITANIUM covers

When installing the mid-pipe section of the exhaust, make sure to have roughly about 1inch spacing between the chassis center-bracket.

Fail to spacing, can cause rattling and causing damage to the vehicle.

* Using the thicker padding included in the box can be a spacer to hold the exhaust as well.

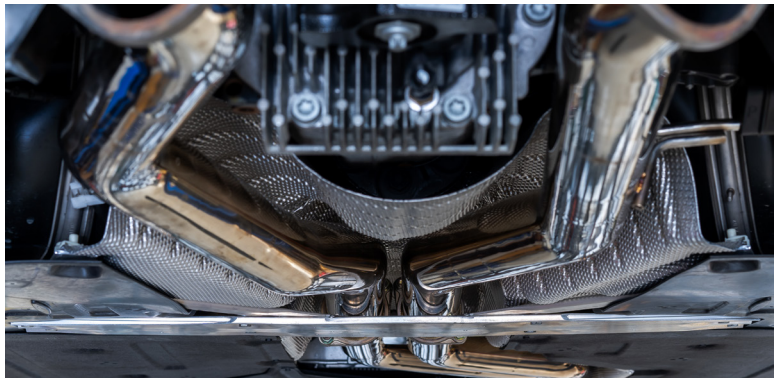

Make sure to disconnect the valve module from the OE exhaust and re-install them on the REMARK valve bracket before installing the exhaust on the car.

Installing the module before the actual exhaust system on the car, can speed up the process with accurate function on the valve/

Taking off the hanger bushing brackets can speed the process of installing the rear-section of the exhaust.

If you do not have correct mechanic tools, assistants with experience can cause damages to your vehicle and the exhaust system. Make sure you have a professional install your exhaust system correctly.

