
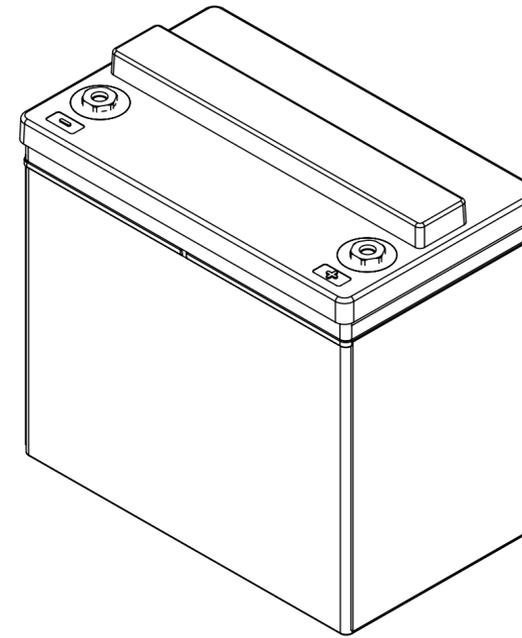




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00282 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REV HEIGHT DIMS	8/1/13	JBT
B	REVISED CONTAINER & OAH DIMS	6/12/20	PH

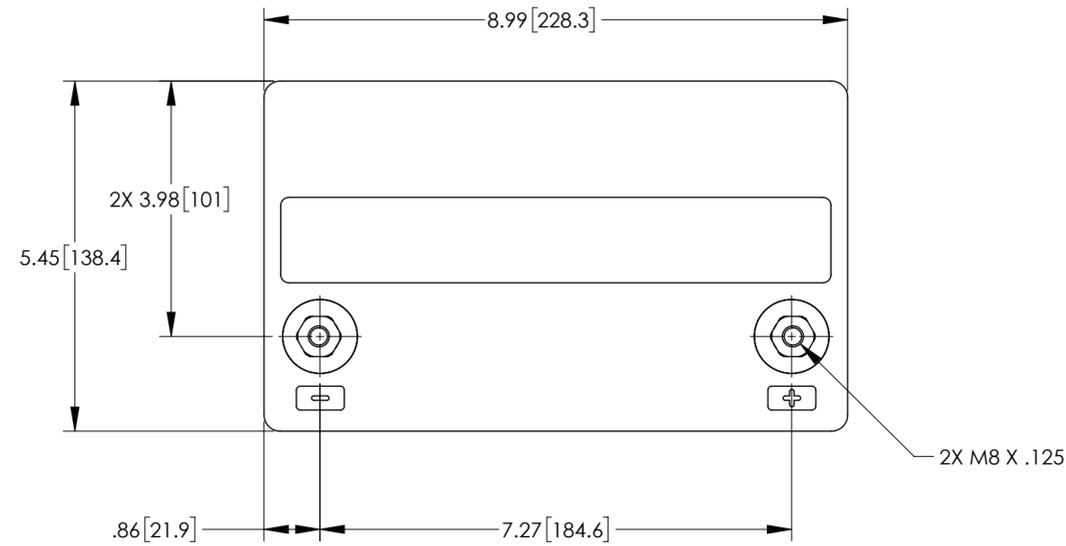

REFERENCE VIEW

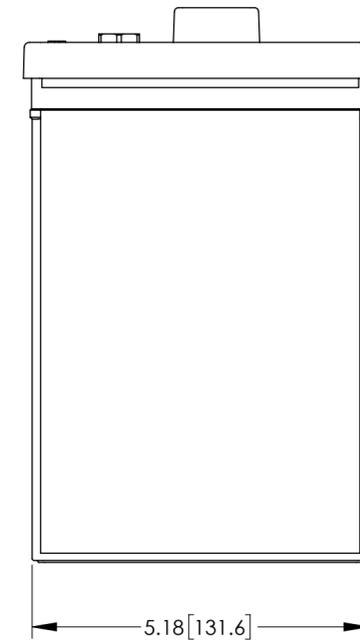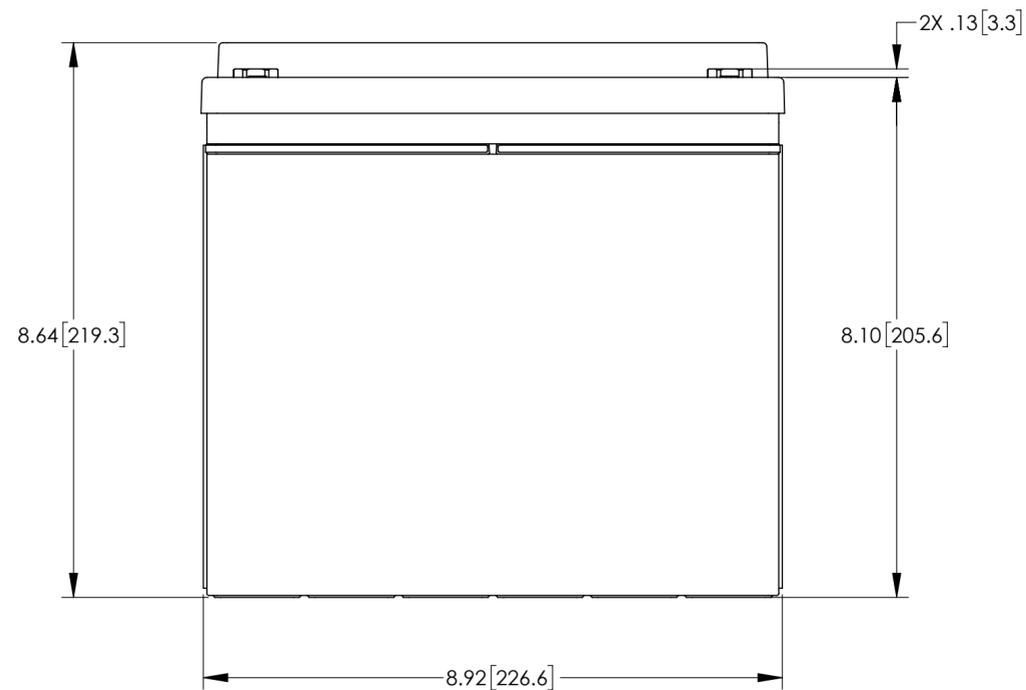

ENVELOPE DRAWING

CAPACITY RATINGS		
PART NUMBER	PVX-490T	PVX-560T
NOMINAL WEIGHT	36 LBS [16.4 KG]	40 LBS [18.2 KG]
AMPERE HOUR CAPACITY @24 HOUR 1.75 VOLTS/CELL @77° F (25° C)	49 AH	56 AH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790			
FRACTIONS	DECIMALS	ANGLES	APPROVALS		DATE		TITLE	
±1/32	.XX ± .12 .XXX ± .060	±1°	DRAWN ELH		8/13/01		BATTERY, SLA, 12 VOLT, PVX-560T SERIES	
TREATMENT	NONE		CHECKED HRF		8/20/01		SIZE	REV
FINISH	NONE		APPROVED JBT		8/3/01		C	B
SIMILAR TO	CALC WT		ISSUED DH		6/12/20		CAGE CODE	DWG NO.
							63017	PVX-560T
			SCALE		1:2		SHEET 1 OF 1	