


Easy to install:

1. ULTRA must be laid on a flat surface which is dry, firm and level.
2. Roll out the underlay at 90° to the direction of the floor installation.
3. Butt the edge of the next row tightly to the first, ensuring that they do not overlap, and carefully tape the joints using Envoy ALUMINIUM-Tape.



It's as easy as 1-2-3

Available in three different roll lengths and also in a 10m Z-folded pack.

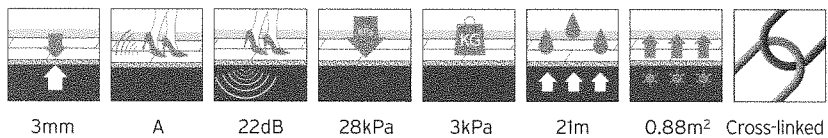

ULTRA

Product Code	Width	Length	Unit Weight	Pallet Qty	Colour
EF-ULTR-10Z	1m	10m	0.66kg	40	Grey
EF-ULTR-10	1m	10m	0.66kg	40	Grey
EF-ULTR-25	1m	25m	1.65kg	12	Grey
EF-ULTR-50	1m	50m	3.30kg	6	Grey

Technical Performance Data:

Property	Value	Standard
Thickness	3mm	ISO 1923
Drum Sound	A	related to EPLF norm 021029-3
Impact Sound Transmission	22dB	ISO 140-8 / ISO 717-1
Compressive Strength at 0.5mm deflection	28kPa	ISO 844 / EN 13163
Compressive Creep*	3kPa	EN 1606 / EN 13163
Water Vapour Diffusion**	21m	ISO1663
Thermal Resistance at 10°C	0.088m² K/W	ISO 8301

*(10 years, max. 12/10%) max load

**Water vapour diffusion equivalent air layer thickness S_d (23°C, 0-50% rel.hum)

The given values for water vapour diffusion (S_d) are valid for the foam sheet only and when the butted joints are carefully taped.