

## Three Door Freezer, Unlit Sign

**Range:** ActiveCore Freezer

**SKOPE ID:** LT15GYN

**Dimensions:** 1705 mm (W) × 745 mm (D) × 2210 mm (H)

**Capacity:** 1396 L


**Project**

**: Item**

**#:**



A high-efficiency, top-mounted heavy duty display freezer suitable for both front and back of house applications. By using natural refrigerants the freezer achieves high performance with low energy consumption. This model has glass doors, with triple-glazed heated insulated panels with Active Condensation Control (heat is applied only when condensating), an unlit sign and internal lighting, with customisable additional shelving, different locks, or specialised ICE storage. With L1 compliance it is engineered to serve frozen food at a standard -18°C to -21°C and is adjustable from -12°C to -26°C. It is certified under GEMS to the mandatory climate class 3 and is fully tested to operate in ambient environments of up to 40°C (climate class 5). The refrigeration cartridges can be fully removed in line with best practice for safe servicing of flammable refrigerants. The cabinet includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The freezer is certified to all Australian and New Zealand refrigeration and electrical safety standards.

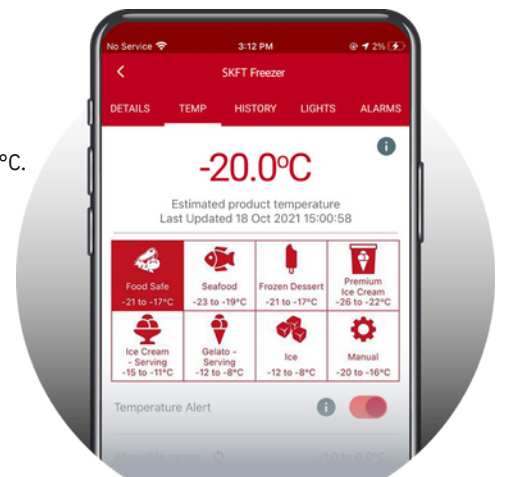

**Warranty**



**ActiveCore Technology**



**Natural Refrigerant**




**GEMS**



**SKOPE-connect**



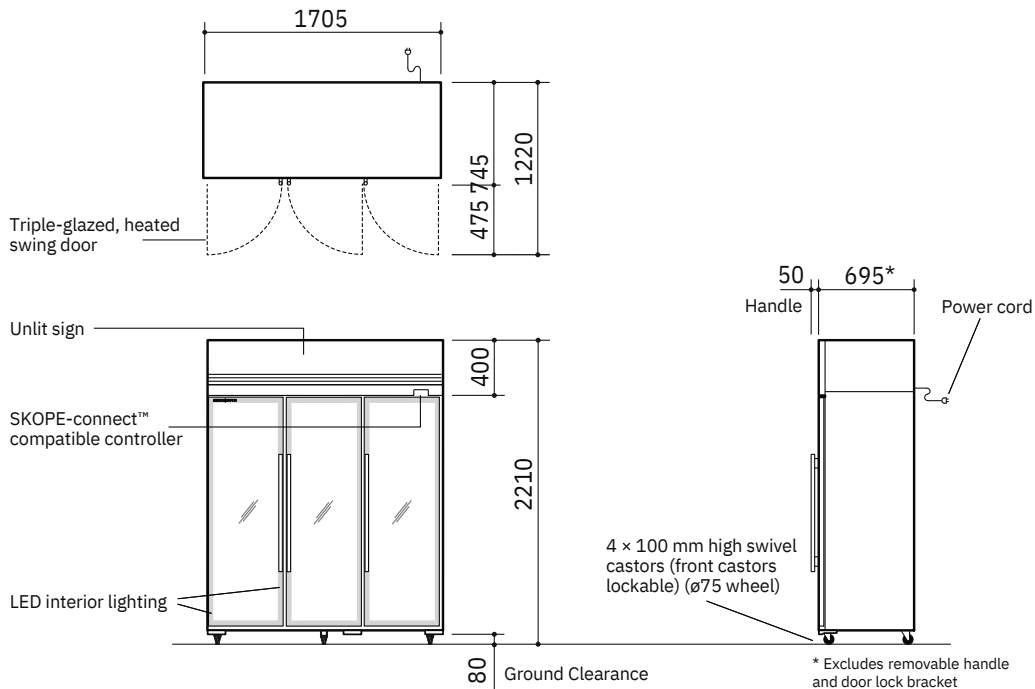

## Cabinet

<b>Type</b>	SKFT Freezer
<b>Finish</b>	Stainless steel or powdercoated galvanised steel with optional colours from within the available SKOPE range
<b>Insulation</b>	Type PU foam Thickness (mm) 50 Blowing Agent Cyclo-iso pentane (C5H10/C5H12) Type Glass swing door (triple-glazed, heated, argon-filled)
<b>Doors</b>	Height (mm) 1570 Opening Size Width (mm) 436
<b>Shelving</b>	Fifteen adjustable height plastic-coated wire shelves 10 x side shelf (502W x 467D), 5 x middle shelf (571W x 467D)
<b>Lighting</b>	Signn.a. Interior* 3 x 20 W, 1400 mm LED strip side light

## Dimensions†

	External	Internal	Pack
<b>Width (mm)</b>	1705	1605	TBC
<b>Depth (mm)</b>	745	554	TBC
<b>Height (mm)</b>	2210	1570	TBC
<b>Weight (kg)</b>	(castors) TBC		TBC
<b>Capacity (L)</b>	1396		
<b>Footprint (m<sup>2</sup>)</b>	1.27		

## Ventilation (mm)

<b>Top</b> 300	<b>Sides</b>	Not required	<b>Rear</b>	10
----------------	--------------	--------------	-------------	----

## Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions At each joint	Single cabinet		Multiple cabinets At each end wall
	Less than 1 metre	±5 mm ±5 mm	
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

## Performance

<b>Product Temperature Range (°C)</b>	-18 to -21 (adjustable* from -12 to
<b>Maximum Ambient Temperature (°C)</b>	-26) 40
<b>Sound Level (dB(A))</b>	Standard 67 Hush Mode* 65

## Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	2
<b>Product Temperature Class</b>	L1 (less than -18°C)
<b>Total Energy Consumption</b>	31.12 kWh/24 h
<b>Annual Running Costs</b>	\$3408 (@ \$0.30/kWh)

## Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2.3 m power cord with 3-pin, 15 amp plug
<b>Current draw (A)</b>	11.5

## Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)
<b>System Type</b>	Removable cartridge
<b>Cartridge Weight (kg)</b>	47.5 x 2
<b>Refrigerant/Charge</b>	R290/112 x 2 g
<b>Nominal Capacity (W)</b>	1504 (2 x 752)
<b>Heat Rejection (W)</b>	Average 1305 Peak 1540 Hot gas
<b>Defrost Type</b>	No plumbing required
<b>Drainage</b>	

\* Accessible via the free SKOPE-connect™ app.



SKFT1500N-A  
on the SKOPE website