




## PRODUCT FEATURES

- New intelligent control circuit dedicated to saving power and water consumption.
- Micro computer controller controls ice making process to work at peak performance in any conditions.
- Inbuilt safety features – freeze cycle back up timer, defrost back up, low voltage & high amp protector.
- New 7 segment operational display panel for ease of use.
- Unique closed cell water circuit for ultimate contamination protection.
- Durable Stainless-Steel Exterior.
- Easily accessible & cleanable air filters reduce costly callouts.
- Exceptionally hard crystal-clear cubes that melt slowly.
- Auto rinse and flush cycle.

## TECHNICAL DRAWING

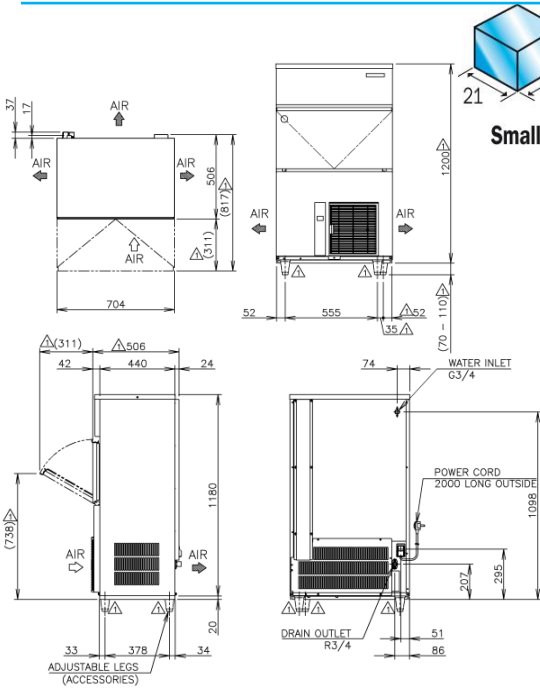

## PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 95kg @ 21°C Air temp; 15°C Water Approx. 82kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 50kg ( Bin Control Setting Approx.28 kg)
Freeze Cycle Time	Approx. 14 Min
Ice Production / cycle	Approx. 1.15kg/190pcs
Dimensions	704mm (W) x 506mm (D) x 1,270mm (H) (Includes 70mm-110mm Legs)
Cooling	Air
Weight Net/Gross (kg)	76/85
Refrigerant Charge	R404A / 380g
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10 AMP Plug
Amperage	Running: 4.5A Rated: 4.5A Starting: 19A
<b>Operating Conditions:</b>	
Ambient Temp	1-40°C
Water Supply Temp	5-35°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%



For free 6 month extended warranty, register online within 4 weeks of purchase date.  
[hoshizaki.com.au](http://hoshizaki.com.au)



## INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Room ventilation or air conditioning can improve the situation by reducing the humidity.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

\*Refer to manual for full installation & maintenance requirements.