



Thanks to a continuous and regular flow, the water is distributed on a refrigerated surface designed to increase ice production. Three different sizes are available **FULL DICE, HALF DICE** and **LARGE DICE**

High production modular ice maker.
Up to 400kg production per 24/hr of dice cube.
Head only, stainless steel cabinet.
Complete with water & drain hoses.
15 AMPS, single phase power supply.



ICE PRODUCTION


Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C					
°F					
10°	360	395	420	430	
50°	794	871	926	948	
21°	340	370	390	400	
70°	750	816	860	882	
32°	280	305	312	320	
90°	617	672	688	705	
38°	225	250	257	265	
100°	496	551	567	584	


Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C					
°F					
10°	315	347	365	370	
50°	694	765	805	816	
21°	300	332	350	355	
70°	661	732	772	783	
32°	280	315	327	335	
90°	617	694	721	739	
38°	270	305	317	325	
100°	595	672	699	716	


CUBE TYPE



10g
FULL CUBE
24mm x 22mm x 22mm



6g
HALF CUBE
24mm x 10mm x 29mm



17g
LARGE CUBE
24mm x 29mm x 29mm

Solid ice cube, suitable for quick drink cooling, available in three different sizes, **FULL DICE** (M models), **HALF DICE** (MH models) and **LARGE DICE** (ML models), can be used in various applications: ice buckets, whisky on the rocks and cocktails.

CONTROL PANEL

	Power
	Operating
	Bin Full / Washing
	Alarm
	High Pressure Alarm
	Reset Button / Washing

SUGGESTED STORAGE BIN



BH122+KBT25
Stainless steel storage bin.
406kg capacity.

DIMENSIONS

W x D x H (mm)
760 x 620 x 725

OPERATING REQUIREMENTS

Rejected Heat	4559 W
Air Volume	1180 m ³ /h
















220-240/50/1





R404a GWP=3922


MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
M402 A		4360	2100	16	13.1	19.0	88	194	106	234	4.94
M402 W		4360	1900	16	10.6	210	83	183	101	223	2.55

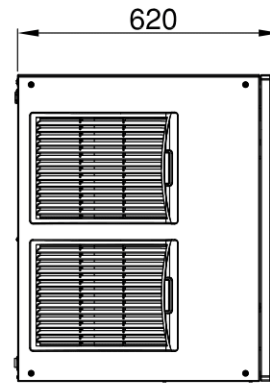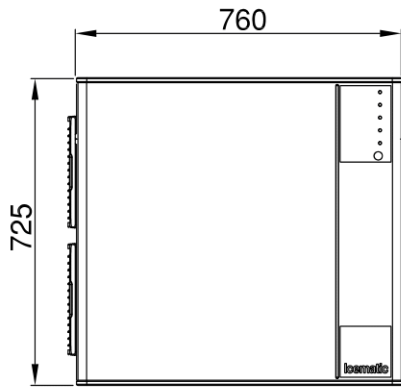


AIR COOLED

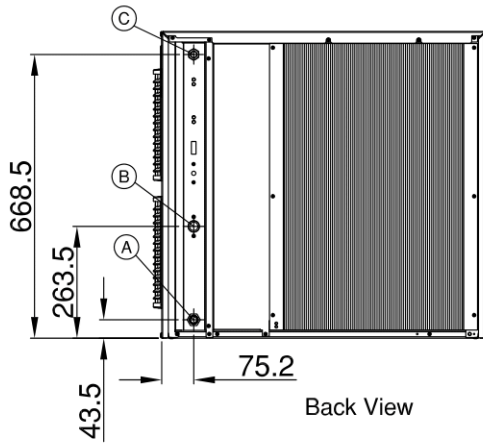


Back View

WATER COOLED

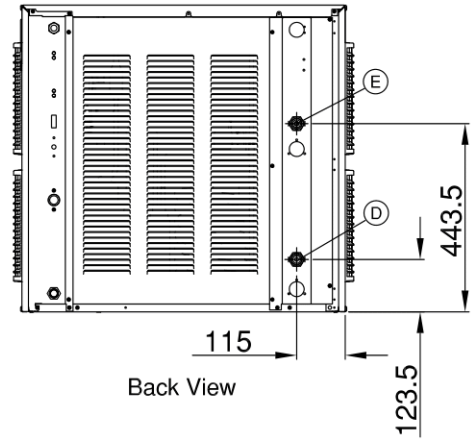

Back View

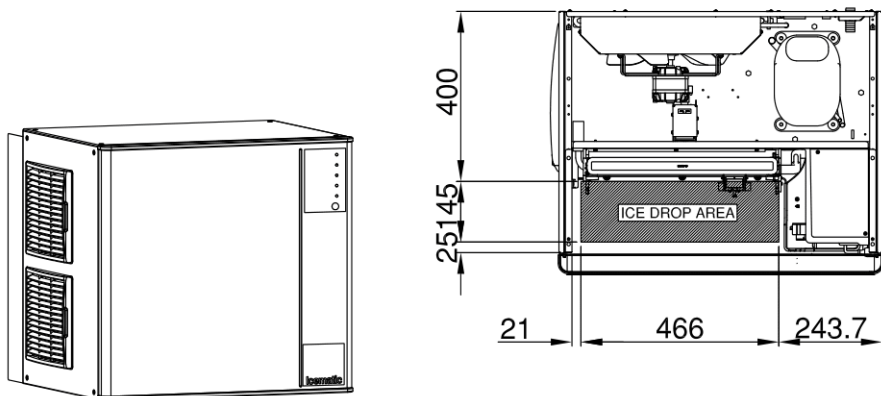

- (A) Water drain 20mm diam.
- (B) Potable water inlet 3/4" gas
- (C) Electrical cable supply
- (D) Water cooled inlet 3/4" gas
- (E) Water cooled outlet 3/4" gas