

FFAR 0.4 - 0.6 Series

Sub Zero Flake Ice Machines
230v 1 Phase 50Hz



FF0.4AR / FF0.6AR
Includes stainless steel covers

The FFAR Series Subzero Flake Ice Machines are designed using advanced technology, with highly economical energy consumption, excellent performance and ease of operation.

The FFAR Series uses advanced computer technology to control the ice making process. The PC board controls and monitors the functionality of the ice machine, allowing for easy diagnosis of any problems that may occur.

Ice is produced at -9 degrees, from a static vertical evaporator, completely sealed, with minimum maintenance required for the lifetime of the machine. The evaporator is made of high quality, low temperature alloy steel, which increases the heat exchange efficiency and reduces the energy consumption of the machine.

The FFAR Series Flake Ice Machines can be fitted on a wide range of storage options depending on the customer's requirements.

The FFAR Series is extremely versatile and is used in a wide variety of applications, including: Seafood, Meat Processing, Poultry, Supermarkets and Mining.

Warranty: 3 years parts and labour, 5 years on evaporator assembly.

ACCESSORIES


WATER FILTERS	
SYSTEM	REPLACEMENT
CD40B	CD2020B CD250B

ICE PRODUCTION

Model Number	Ice Production Per 24hrs
FF0.4AR	400 kg
FF0.6AR	600 kg




OUTSIDE DIMENSIONS



Model	Ice Machine Dimensions W1	Ice Machine Dimensions D1	Ice Machine Dimensions H1
FF0.4AR	1090	700	720
FF0.6AR	mm	mm	mm
	1250	750	820
	mm	mm	mm

Includes stainless steel covers

ICE OUTLET DIMENSIONS

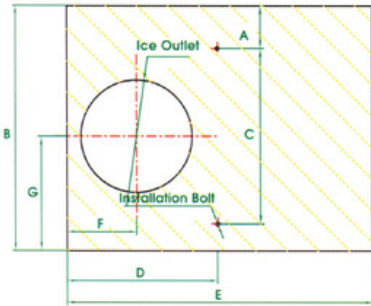

Model	A	B	C	D	E	F	G	Ice Outlet Internal Dia.
FF0.4AR	87	700	395 ± 1	432.5	1090	216.5 mm	447 mm	∅ 32
FF0.6AR	mm	mm	450 ± mm	mm 585	mm	419 mm	430 mm	∅ 6
	95	750	1	mm	1250			32
	mm	mm	mm		mm			6

TECHNICAL PARAMETER

Model	Condenser	Power	Current Draw	Water Consumption	Inlet Water Connection	Drainpipe External Diameter	Net Weight (kg)
FF0.4AR	Air Cooled	2.1	4.5	17L/hr	3/4"	∅ 21	18
FF0.6AR	Air Cooled	kW 3	A	25L/hr	GAS	mm ∅	0
		kW	6.4		3/4"	21 mm	25
			A		GAS		0

- Notes:
- Refrigerant Type: R404A
 - Standard Conditions: Ambient Air Temperature 25°C, Water Temperature 16°C
 - Electrical Voltage: 380V/50Hz / 3N
 - Supply Water Pressure: 1.5 BAR - 5 BAR

