

## Three Solid Swing Door BackBar

**Range:** BackBar

**SKOPE ID:** BB003S

**Dimensions:** 2040 mm (W) × 590 mm (D) × 1025 mm (H)\*

**Capacity:** 635 L

\*Height with castors is adjustable from 1015 to 1030.

**Project**

---

**: Item**

---

**#:**



A solid door under-bar fridge designed to merchandise ready-to-serve cold beverages and food in bars, restaurants, clubs, pubs, and cafés. With M1 compliance it is engineered to serve cold food and drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The fridge uses R290 natural refrigerant for ultra-low-energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards



**Warranty**



**Natural Refrigerant**




**GEMS**



**SKOPE-connect**



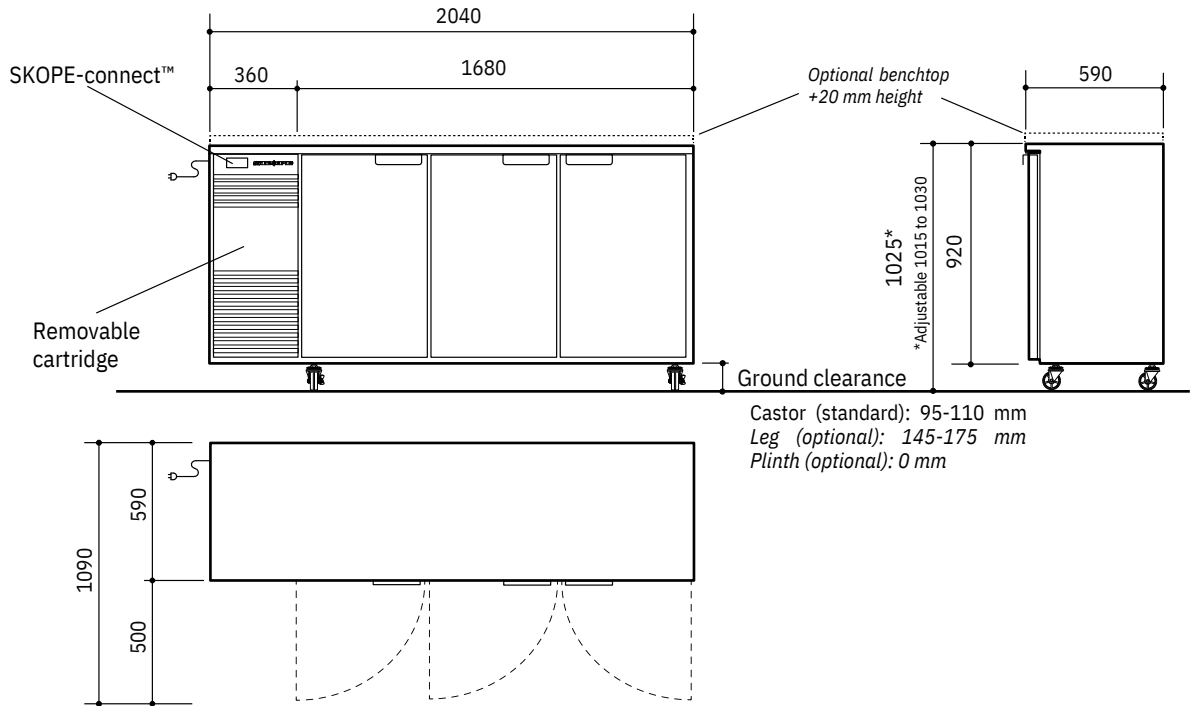

### Cabinet

<b>Type</b>	BackBar
<b>Finish</b>	Powdercoat galvanised steel or stainless steel
<b>Insulation</b>	Type PU foam
	Thickness (mm) 50 Blowing Agent Cyclo-iso pentane (C5H10/C5H12)
<b>Doors</b>	Type Solid swing door ()
	Height (mm) 730 Opening Size Width (mm) 460
<b>Shelving</b>	Six adjustable height plastic-coated wire shelves 4 × outer shelf (497W × 440D), 2 × inner shelf (555W × 440D)
<b>Lighting*</b>	1 × 24 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling

### Dimensions†

	External	Internal	Packaging
<b>Width (mm)</b>	2040	1580	TBC
<b>Depth (mm)</b>	590	530	TBC
<b>Height (mm)</b>	<b>1025</b> (std. castors) 920	758	TBC
<b>Weight (kg)</b>	(plinth mount) 220		TBC
<b>Capacity (L)</b>	635		
<b>Footprint (m<sup>2</sup>)</b>	1.2		

### Ventilation (mm)

<b>Top</b>	Not required	<b>Sides</b>	Not required	<b>Rear</b>	Not required
------------	--------------	--------------	--------------	-------------	--------------

### Product Loading

<b>Facing</b>	<b>330 ml can Loading</b>	44	600 ml bottle	42
	330 ml can	264	600 ml bottle	252

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

### Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 0 to 15)
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Level (dB(A))</b>	Standard < 66 Hush Mode* < 62

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	6
<b>Product Temperature Class</b>	M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	2.55 kWh/24 h
<b>Annual Running Costs</b>	\$279 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase
<b>Cord</b>	supply 1.9 m power cord with 3-pin, 10 amp
<b>Current draw (A)</b>	plug 2.6

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)
<b>System Type</b>	Removable cartridge
<b>Cartridge Weight (kg)</b>	24
<b>Refrigerant/Charge</b>	R290/81 g
<b>Nominal Capacity (W)</b>	650
<b>Heat Rejection (W)</b>	Average 110 Peak 130
<b>Remote Duty</b>	n.a.
<b>Defrost Type</b>	Automatic, off-cycle
<b>Drainage</b>	No plumbing required



BB.3.SSW  
on the SKOPE website