

## Four Glass Swing Door BackBar

**Range:** BackBar

**SKOPE ID:** BB004

**Dimensions:** 2600 mm (W) × 590 mm (D) × 1025 mm (H)\*

**Capacity:** 860 L

\* Height with castors is adjustable from 1015 to 1030.

**Project**

**: Item**

**#:**



A glass door under-bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The 'frameless' glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



**Warranty**



**Natural Refrigerant**




**GEMS**



**SKOPE-connect**



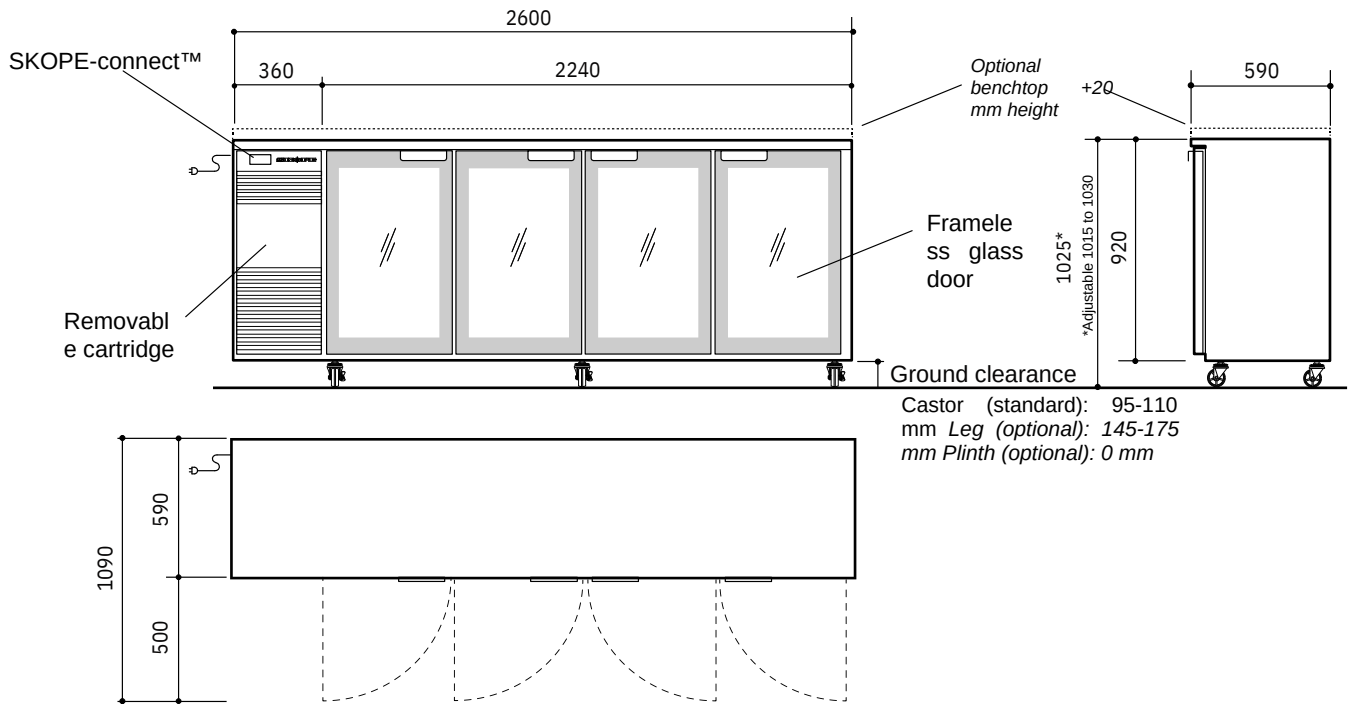

### Cabinet

<b>Type</b>	BackBar
<b>Finish</b>	Powdercoat galvanised steel or stainless steel
<b>Insulation</b>	Type PU foam
	Thickness (mm) 50 Blowing Agent Cyclo-iso pentane (C5H10/C5H12)
<b>Doors</b>	Type Glass swing door (double glazed, low e, argon filled)
	Height (mm) 730 Opening Size Width (mm) 460
<b>Shelving</b>	Eight adjustable height plastic-coated wire shelves 4 × outer shelf (497W × 440D), 4 × inner shelf (555W × 440D)
<b>Lighting*</b>	2 × 16W, cool white (5500-6500K) LED strips on cabinet ceiling

### Dimensions†

	External	Internal	Packaging
<b>Width (mm)</b>	2600	2140	TBC
<b>Depth (mm)</b>	590	530	TBC
<b>Height (mm)</b>	<b>1025</b> (std. castors) 920 (plinth mount)	758	TBC
<b>Weight (kg)</b>	(plinth mount) 278		TBC
<b>Capacity (L)</b>	860		
<b>Footprint (m<sup>2</sup>)</b>	1.53		

### Ventilation (mm)

<b>Top</b>	Not required	<b>Sides</b>	Not required	<b>Rear</b>	Not required
------------	--------------	--------------	--------------	-------------	--------------

### Product Loading

<b>Facing</b>	<b>330 ml can</b>	<b>Loading</b>	60	600 ml bottle	56
	330 ml can		360	600 ml bottle	336

### Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 0 to 15)
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Level (dB(A))</b>	Standard < 66 Hush Mode* < 62

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	7
<b>Product Temperature Class</b>	M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	4.48 kWh/24 h
<b>Annual Running Costs</b>	\$491 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase
<b>Cord</b>	supply 1.9 m power cord with 3-pin, 10 amp
<b>Current draw (A)</b>	plug 4.0

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)
<b>System Type</b>	Removable cartridge
<b>Cartridge Weight (kg)</b>	24
<b>Refrigerant/Charge</b>	R290/81 g
<b>Nominal Capacity (W)</b>	850
<b>Heat Rejection (W)</b>	Average 185 Peak 225 Automatic, off-cycle
<b>Defrost Type</b>	No plumbing required
<b>Drainage</b>	

