


specifications

PG21.UPR.1.SD

ProSpec Series, 1 Door (Solid), Upright Fridge

Project: _____

Item No: _____

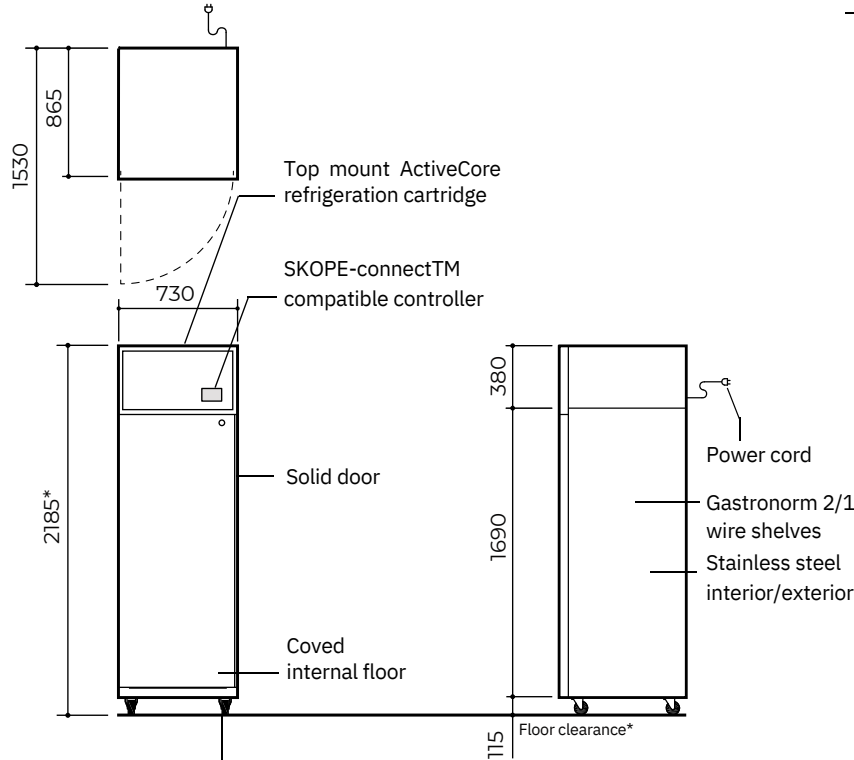

Supplied with removable height adjustable castors (Ø75mm wheel). Optional height adjustable legs available.

CABINET

Doors 1 × self-closing, lockable, solid swing door with stay-open position at over 90°
 Internal door opening 1 × door openings: 1500mm high × 540mm wide
 Shelves 5 × stainless steel GN 2/1 shelves: 530mm wide × 650mm deep
 Worktop n.a.
 Material 304 AISI stainless steel interior and exterior on all faces

PERFORMANCE

Max. ambient temp. 40°C
 Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
 GEMS class 5M1
 GEMS energy consumption 2.20 kWh/24h
 GEMS annual running cost \$241 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5
 Interior lighting 1 × 1400mm, 16W LED light (door activated)
 Power cord Supplied with 2.3m, 10 Amp plug and lead
 Power supply 220-240 Volts a.c. 50 Hz, single phase supply
 Current draw 3.0 Amps (unit 2.6 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect compatible)
 Connectivity interface Bluetooth® wireless technology
 Refrigeration system Top mounted, integral, removable ActiveCore refrigeration unit (part number UTHCNI-0010)
 Refrigerant R290 / 99g (natural refrigerant)
 Nominal capacity 740 Watts
 Heat rejection (Avg/peak) 90 Watts/140 Watts
 Drainage No plumbing required

DIMENSIONS

	External	Internal
Height	2185mm*	1500mm
Width	730mm	565mm
Depth	865mm	675mm
Floor area	0.63m ²	
Weight	150kg	
Gross volume	572L	
Net volume	480L	

* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	2185-
Optional height adjustable legs	2200mm
No castors	2220-
	2250mm

Dimensional tolerances		2070mm
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions Overall cabinet dimensions		
Less than 1 metre ±5mm		
More than 1 metre -5mm to +10mm		
Length of multiple cabinets		
		At each joint At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	m
		+15m

Ventilation requirements		m
Top	300mm	
Sides	Not	
Back	required	
Bottom	Not	

required
Not

required PSS0595 Rev. 1.3 Mar. 2021