


specifications

RF7.UPR.2.SD

ReFlex Series, 2 Solid Door, Upright Fridge

Project: _____

Item No: _____

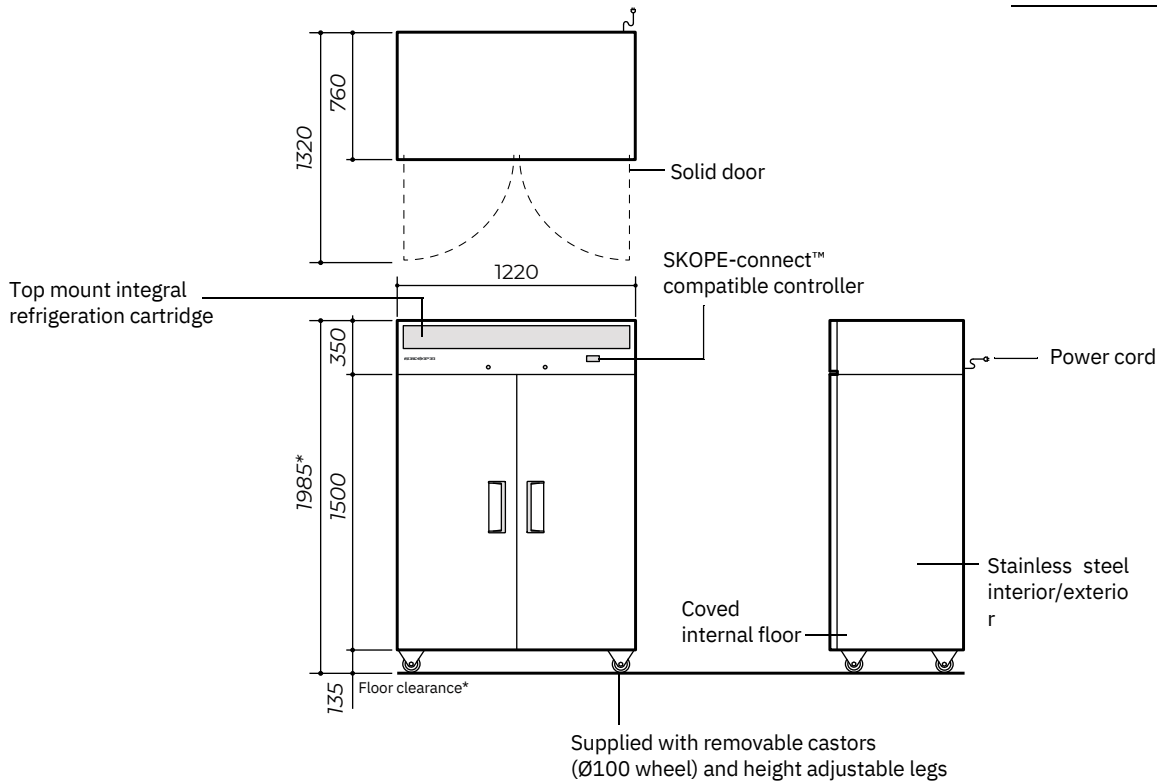

CABINET

Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1375mm high × 495mm wide
Shelves	10 × adjustable height shelves: 530mm wide × 530mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C) 5M1
GEMS class	3.91 kWh/24h
GEMS energy consumption	\$428 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 1200mm, 12W LED lights (door activated)
Power cord	Supplied with a 10 amp plug and 2m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	2.0 amps (includes unit 1.5 amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (part number UTKCNI-0018)
Refrigerant	R290/90g (natural refrigerant)
Nominal capacity	650 watts
Heat rejection (Avg/peak)	165 watts/205 watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	1985 mm*	1395 mm
Width	1220 mm	1100 mm
Depth	760 mm	600 mm
Floor area	0.93 m ²	
Weight	159 kg	
Gross volume	921 L	
Net volume	712 L	

* With supplied castors fitted. See height variation below

Height variation

Supplied castors	1985 mm
Supplied height adjustable legs	1995-2035 mm
No castors or legs	1850 mm

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions Overall cabinet dimensions

Less than 1 metre	±5 mm
More than 1 metre	-5 mm to +10 mm

Length of multiple cabinets

	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements

Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0589 Rev. 2.13 Jul. 2022