


STAINLESS STEEL UNITS

UCPSS PILLOW BLOCKS

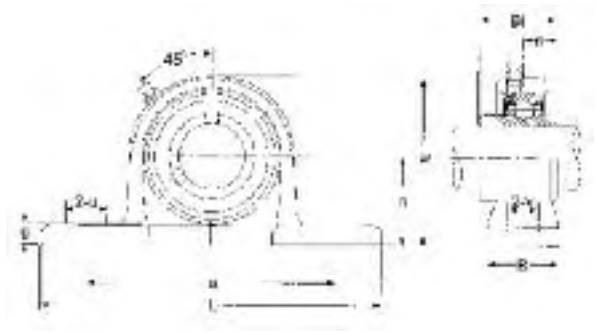

UCPSS

- Stainless steel housing – solid base
- Stainless steel wide inner ring bearing

UCPSS PILLOW BLOCKS

Unit No.	Shaft Dia. d (in.)	Dimension (in) (mm)										Bolt Size (in)	Bearing No.	Housing No.	Weight (lb)
		h	L	e	B	v	u	g	w	Bi	n				
UCPSS204-12SS	3/4	1-5/16 33.3	5 127	3-3/4 95	1-1/2 38	17/32 13	3/4 19	9/16 14	2-17/32 64	1-1/4 31	1/2 12.7	3/8	SSUC204-12	SP204	1.256
UCPSS205-16SS	1	1-7/16 36.5	5-1/2 140	4-1/8 105	1-1/2 38	17/32 13	3/4 19	19/32 15	2-25/32 70	1-11/32 34.1	9/16 14.3	3/8	SSUC205-16	SP205	1.631
UCPSS206-18SS	1-1/8	1-11/16	6-1/2	4-25/32	1-29/32	11/16	27/32	21/32	3-1/4	1-1/2	5/8	9/16	SSUC206-18	SP206	2.403
UCPSS206-19SS	1-3/16	42.9	165	121	48	17	21	16	82	38.1	15.9				
UCPSS206-20SS	1-1/4														
UCPSS207-20SS	1-1/4	1-29/32	6-19/32	5	1-29/32	11/16	27/32	11/16	3-5/8	1-11/16	11/16	9/16	SSUC207-20	SP207	3.174
UCPSS207-22SS	1-3/8	47.6	167	127	48	17	21	17	92	42.9	17.5				
UCPSS207-23SS	1-7/16														
UCPSS208-24SS	1-1/2	1-15/16 49.2	7-1/4 184	5-13/32 137	2-5/32 54	11/16 17	27/32 21	23/32 18	3-7/8 98	1-15/16 49.2	3/4 19	9/16	SSUC208-24	SP208	3.791
UCPSS212-39SS	2-7/16	2-3/4 69.8	9-1/2 241	4-1/4 184	2-25/32 70	13/16 20	1 25	1 25	5-7/16 138	2-9/16 65.1	1 25.4	5/8	SSUC212-39	SP212	8.377

* Lubricated with food grade grease.