



LANDSCAPE MACHINERY



WHY CAMON?

M A D E I N B R I T A I N

Our CAMON range includes machines for lawn care, chipping, and stump grinding.

The machines are all designed and built by us in West Sussex to the highest specifications.


The quality speaks for itself, all CAMON machines are built to last and produce outstanding results, and are competitively priced.

We have a well-equipped workshop and assembly lines where the machines are assembled and all pre-sales checks are undertaken.

We also have an experienced fabrication team who manufacture many of the components that make up the machines.



QUALITY

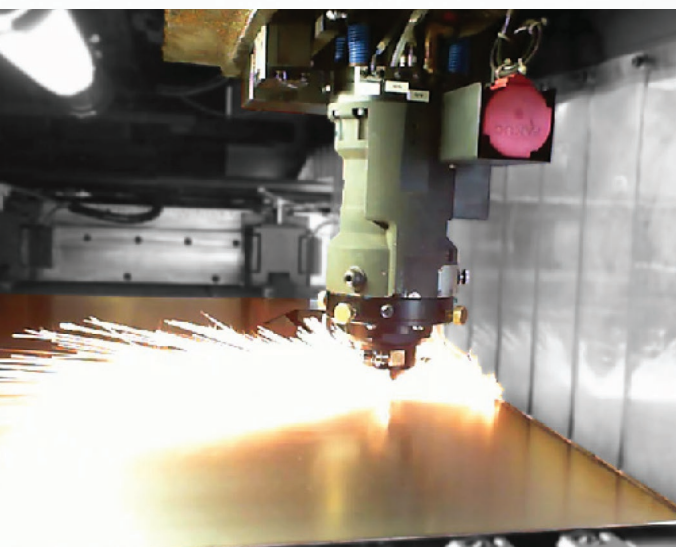

SAFETY

All machines have two-step safety features in the form of starting levers or lock-out switches.



RELIABILITY

Built to withstand rigours of daily use, reliability is a key feature of all CAMON machines.



PERFORMANCE

Designed to offer great performance results even when operating in difficult conditions.



COMPETITIVE PRICE

These UK-designed and built machines offer great value for money.



WARRANTY

Two year warranty for commercial use and three years for domestic use, for complete peace of mind.

Tracmaster's expertise is second-to-none and our continuous investment in research and development ensures that our products are constantly cutting edge.

We are very proud that CAMON is the first choice for so many customers across the UK, and Europe where our distribution network is expanding.

Professional landscapers, contractors, local authorities, utilities companies, conservation groups, hire outlets, and domestic users all choose CAMON over alternative products.

Turf Cutter TC07




- ◆ 30cm (12") working width.
- ◆ A gearbox drive system provides an extremely positive drive to the rear wheels.
- ◆ Height can be easily adjusted from 1cm to 3½cm (½" to 1½").
- ◆ Hardened steel cutting blade can be reversed providing double the life.
- ◆ A reliable centrifugal clutch with a permanently tensioned belt provides drive to the blade.
- ◆ Permanent tensioning of the belt ensures that the belt life is considerably prolonged
- ◆ The centrifugal clutch ensures that the machine will not operate when the engine is idling.
- ◆ A unique anti-vibration mount on the handlebars keeps vibration to under 4m/s².




TC07	Engine	Honda GX160 petrol
	Working Width	30cm (12")
	Cutting Depth	1cm to 3½cm (½" to 1½")
	Drive	Self-Propelled
	Weight	93kg
	Dimensions	128 x 54 x 102cm


The **SELF-PROPELLED TC07** will enable you to effortlessly **REMOVE** a 12" wide strip of turf.

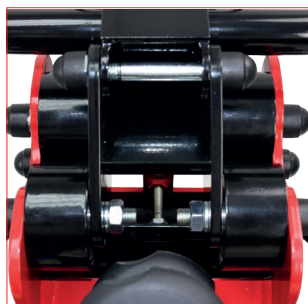

ANTI VIBRATION HANDLEBARS
To reduce vibration during operation.

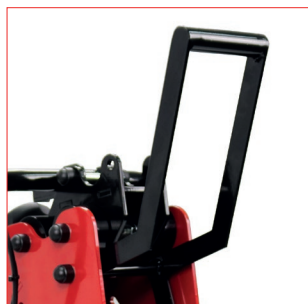

SIMPLE OPERATION
Single lever to engage cutting blade.

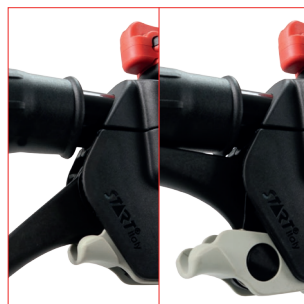


TWO-STEP START LEVER
A two-step system for safe operation.




FOLDING HANDLEBARS
For easy transportation and storage.



DEPTH ADJUSTMENT
Straightforward and precise depth adjustment.

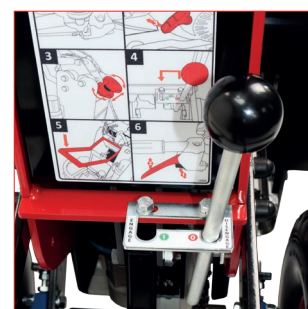

POSITIVE GEAR DRIVE
Driven rear wheels even in difficult conditions.

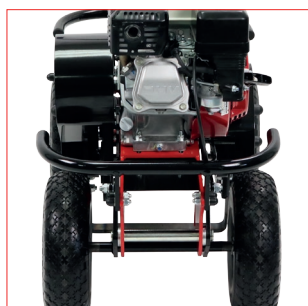


DESIGNED FOR EASY ACCESS
Only 54cm wide to fit through garden gates etc.



CENTRIFUGAL CLUTCH
For operator safety and reliable performance.



CHOICE OF WHEELS
Puncture-proof or agricultural tyres.

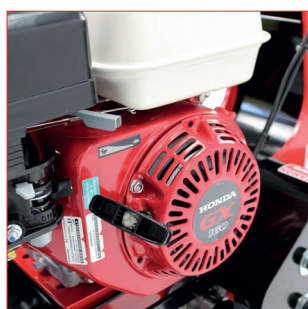

HONDA PETROL ENGINE
For top performance and reliability.



FRONT & REAR BUMPER BARS
To protect the engine and machine.



REVERSIBLE CUTTING BLADE
Reversible, hardened steel blade.

Lawn Aerator

LA25



- ◆ “Off-set” crank punches the tines into the ground resulting in perfect aeration.
- ◆ Supplied with both hollow corer tines and standard solid spikes.
- ◆ Fitted with solid PU tyres to eliminate punctures and to reduce tread marks.
- ◆ Only 64cm (25”) wide to easily fit through standard garden gates.
- ◆ The tines are easy to access and can be changed in less than 5 minutes.
- ◆ The tines are positioned 12cm (5”) apart.
- ◆ Tines punch at approximately 7½cm to 10cm (3” to 4”) intervals, depending on the speed the machine is travelling.




LA25	Engine	Honda GX160 petrol
	Working Width	40cm (16")
	Aerating Depth	7½cm (3")
	Tines Included	10mm Solid and Hollow Corer
	Weight	103kg
	Dimensions	100 x 64 x 68cm

CORER	SOLID	SOLID	CHISEL	CHISEL	CHISEL	FRACTURE
Hollow Corer Tine	Standard Solid Spike	Wide Solid Spike	Narrow Chisel Tine	Medium Chisel Tine	Wide Chisel Tine	Standard Fracture Tine
						
21mm Outer Diameter 15mm Inner Diameter	10mm Diameter	15mm Diameter	20mm Wide 4mm Thick	30mm Wide 4mm Thick	40mm Wide 4mm Thick	40mm Wide 10mm Thick




With **SOLID** and **HOLLOW** tines the LA25 offers maximum flexibility for **REJUVENATING** lawns.

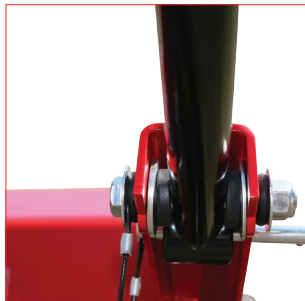

ANTI VIBRATION HANDLEBARS
To reduce vibration during operation.



SIMPLE TINE ENGAGEMENT
Simple lever engages the tine board.

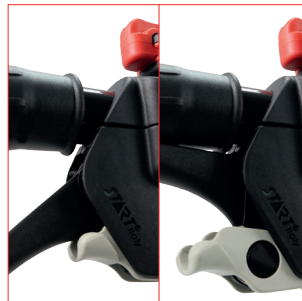

TWO-STEP START LEVER
A two-step system for safe operation.




FOLDING HANDLEBARS
For easy transportation and storage.



DESIGNED FOR EASY ACCESS
Only 64cm wide to fit through garden gates etc.



SELF-PROPELLED
The action of the tines walks the machine forward.

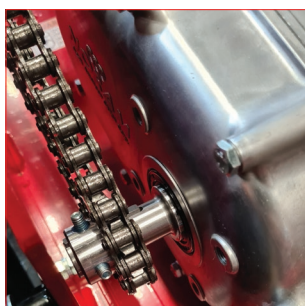

CHAIN DRIVE
For reliability and performance.



ADJUSTABLE TINE BOARD
To alter distance between tines.



PUNCTURE-PROOF WHEELS
Help to prevent punctures.



HONDA PETROL ENGINE
For top performance and reliability.



FRONT BUMPER BAR
To provide engine protection.



CORERS AND SPIKES
Supplied with hollow and solid tines.


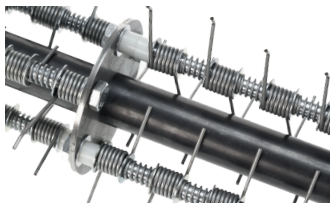
Lawn Scarifiers **LS42 & LS52**



- ◆ Simple to use and with a range of four different cartridges comprising a Lawn Scarifier, Lawn Rake, Lawn Slitter, and Lawn Renovator each producing outstanding results in different applications.
- ◆ A quick and precise lockable adjustable height system.
- ◆ Anti-vibration mounts beneath the engine to reduce vibration.
- ◆ Additional anti-vibration mounts available to further reduce vibration.
- ◆ Folding handlebars for easy transportation and storage.
- ◆ Narrow puncture-proof wheels enable operation close to walls and fences.
- ◆ The Honda engine rotates the tines at high speed to pull out the maximum amounts of thatch.
- ◆ Optional collection bag is available if required.

LS42	Engine	Honda GX160 petrol
	Working Width	42cm (17")
	Working Height	Adjustable
	Collection	Optional 55L bag
	Weight	68kg
	Dimensions	120 x 59 x 98cm

LS52	Engine	Honda GX200 petrol
	Working Width	52cm (20")
	Working Height	Adjustable
	Collection	Optional 65L bag
	Weight	72kg
	Dimensions	120 x 69 x 98cm

FREE SWINGING	FIXED BLADE	RENOVATION	SPRING RAKE
Lawn Scarifier Cartridge	Lawn Slitter Cartridge	Lawn Renovation Cartridge	Lawn Rake Cartridge
			
LS42: 30 Blades // LS52: 36 Blades	LS42F: 15 Blades // LS52F: 18 Blades	LS42V: 15 Blades // LS52V: 18 Blades	LS42R: 30 Springs // LS52R: 36 Springs


The LS42 & LS52 will efficiently **REMOVE MOSS**
and **THATCH** providing **OUTSTANDING** results.



ANTI VIBRATION HANDLEBARS
To reduce vibration during operation.



FINE HEIGHT ADJUSTMENT
Lockable, precise height adjustment.

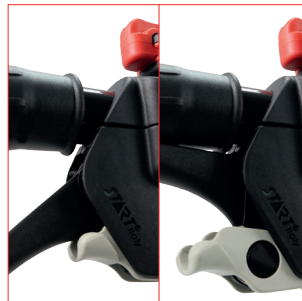


TWO-STEP START LEVER
A two-step system for safe operation.



FOLDING HANDLEBARS
Quick release folding handlebars.



RUBBER MOUNTS
Engine fitted to rubber mounts to reduce vibration.

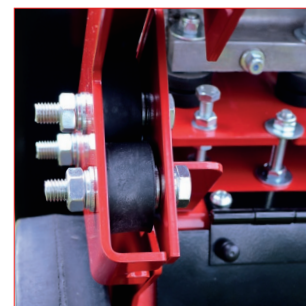

OPTIONAL AV MOUNTS
Optional rubber mounted handlebars for further reduced vibration.



CHOICE OF CARTRIDGES
Free-swinging, fixed blade, renovation, or spring rake cartridges.



ANGLED REAR FLAP
For more efficient thatch and moss discharge.



NARROW WHEELS
Enabling operation close to walls etc.



HONDA PETROL ENGINE
For top performance and reliability.



OPTIONAL COLLECTION BAG
Large, easy to fit optional bag.




WHEEL SCRAPERS
Prevents build-up of grass and mud.

Lawn Scarifier

LS14



- ◆ Simple to use and with a range of three different cartridges comprising a Lawn Scarifier, Lawn Rake, and a Lawn Slitter.
- ◆ A quick and precise lockable adjustable height system.
- ◆ Lightweight and durable, ideal for small to medium size lawns.
- ◆ Folding handlebars for easy transportation and storage.
- ◆ Narrow puncture-proof wheels enable operation close to walls and fences.
- ◆ The Honda engine rotates the tines at high speed to pull out the maximum amounts of thatch.
- ◆ An optional collection bag is available if required.

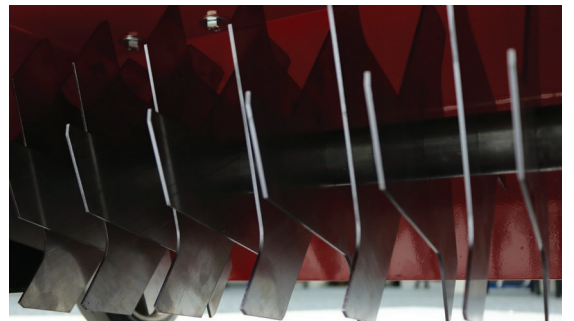

FREE SWINGING Lawn Scarifier Cartridge	FIXED BLADE Lawn Slitter Cartridge	SPRING RAKE Lawn Rake Cartridge
		
LS14: 30 Blades	LS14F: 15 Blades	LS14R: 30 Springs

LS14	Engine	Honda GP160 or GX160 petrol
	Working Width	42cm (17")
	Working Height	Adjustable
	Collection	Optional 35L bag
	Weight	45kg
	Dimensions	95 x 63 x 102cm



The **LIGHTWEIGHT** and **DURABLE LS14** is ideal for both **DOMESTIC** and **PROFESSIONAL** users.




NARROW WIDTH

Only 63cm wide for easy access.



FINE HEIGHT ADJUSTMENT

Lockable, precise height adjustment.

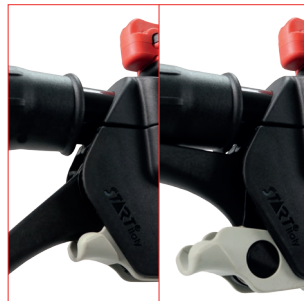

TWO-STEP START LEVER

A two-step system for safe operation.




FOLDING HANDLEBARS

Quick release folding handlebars.




FLOATING FRONT AXLE

Allows the machine to follow ground contours.

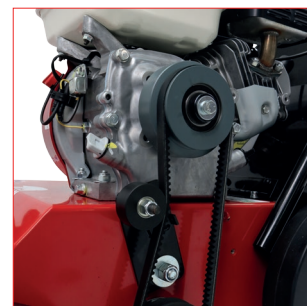

CENTRIFUGAL CLUTCH

For operator safety and reliable performance.

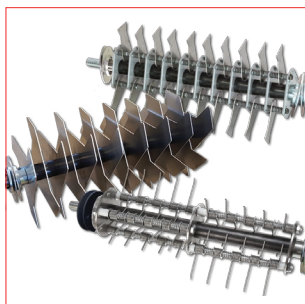

CHOICE OF CARTRIDGES

Free-swinging, fixed blade, or spring rake cartridges.



ANGLED REAR FLAP

For more efficient thatch and moss discharge.



PUNCTURE-PROOF WHEELS

Reduce machine down-time.



HONDA PETROL ENGINE

Choose from Honda GP160 or GX160.



OPTIONAL COLLECTION BAG

Easy to fit optional 35L bag.



LIGHTWEIGHT

Only 45kg for easy manoeuvrability.

Stump Grinder

SG30



- ◆ Fitted with efficient and hardwearing Greenteeth®.
- ◆ Top of the range belts transmit more power and need minimal adjustment.
- ◆ Superior heavy duty wheel brake.
- ◆ Folding handlebars for transportation and storage.
- ◆ Only 63cm wide to fit through garden gates etc.
- ◆ The Greenteeth® are inexpensive and quick to replace.
- ◆ The teeth have 3 edges so can be turned 3 times.
- ◆ Reinforced chassis for additional strength.
- ◆ Top of the range centrifugal clutch for durability.
- ◆ Efficient teeth mean less strain on the machine.
- ◆ Very strong robust handlebar structure.
- ◆ Simple operating controls ensure straightforward operation.



SG30	Engine	Honda GX390 petrol
	Cutting Height	56cm (22") above ground
	Cutting Depth	33cm (13") below ground
	Teeth	8 Greenteeth®
	Weight	135kg
	Dimensions	190 x 63 x 126cm

This compact machine will **REMOVE** unwanted **TREE STUMPS** simply, **SAFELY**, and efficiently.



NARROW WIDTH

Only 63cm wide for easy access.



SIMPLE CONTROLS

For straightforward operation.



SAFETY OPC LEVER

Lever must be held to operate.




WHEEL BRAKE LEVER

Conveniently located brake lever.



ADJUSTABLE HANDLEBARS

Handlebars are adjustable for operator comfort and safety.

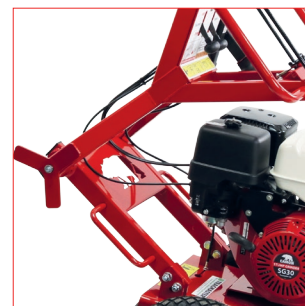

FOLDING HANDLEBARS

Folding handlebars for easier transport and storage.



EFFICIENT GREENTEETH®

Fitted with efficient, cost effective, and hardwearing Greenteeth®.



TOP OF THE RANGE BELTS

For optimal power, long life and minimal adjustment.



LARGE WHEELS

For manoeuvrability on uneven ground.



HONDA PETROL ENGINE

For top performance and reliability.



LIFTING HANDLES

To assist with transporting.



RUBBER SAFETY SKIRTING

Fitted in sections around the SG30.

Portable Chipper

C50i



- ◆ The infeed chute sits at a steep angle to ensure the vegetation reaches the chipping blade.
- ◆ A single chipping blade rotates at high speed to chop vegetation.
- ◆ Chippings can be collected in the optional collection bag or fired directly onto the ground.
- ◆ Fitted with puncture proof wheels and transport handles to ensure easy manoeuvrability.
- ◆ The feed chute is easily disconnected in seconds for easy transportation and storage.
- ◆ Chipping capacity of 5" (2cm).



C50i	Engine	Honda GX200 petrol
	Chipping Capacity	5cm (2")
	Chipping Blade	One
	Collection	Optional
	Weight	59kg
	Dimensions	68 x 58 x 60cm

The C50i is a **COMPACT** yet **POWERFUL** and **EFFECTIVE** garden chipper.



EASY TO TRANSPORT
Very compact when separated.




REMOVABLE FEED CHUTE
Easily disconnected feed chute.



SAFETY OPC LEVER
Lever must be held to operate.



GREASE POINT ACCESS
Easily access lubrication point.

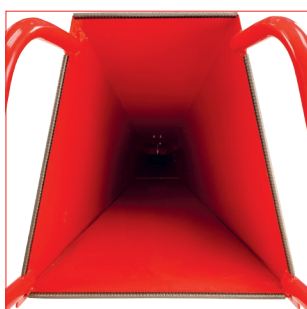

STEEP INFEE CHUTE
The chipper is gravity fed so the feed chute sits at a steep angle.



SAFETY LOCKOUT SWITCHES
Two lockout switches prevent accidental use of the machine.



FOLDING DISCHARGE CHUTE
To help minimise storage space.



OPTIONAL COLLECTION BAG
Available as an optional extra.



PUNCTURE-PROOF WHEELS
Solid wheels to prevent punctures.



HONDA PETROL ENGINE
For top performance and reliability.



LIFTING BAR
To assist with transporting.



CHIPPING BLADE
High strength steel for tough vegetation.

OUR SERVICES



SPARE PARTS

Normally available from stock, we carry a complete range of original spare parts for all our machines.



TECHNICAL SUPPORT

Our technical team are available during office hours to provide a telephone support service to keep you running.



WARRANTY

Our warranty periods reflect the build quality of our machines; namely 3 years for domestic and 2 years for commercial use.



NATIONWIDE SUPPORT

We have a nationwide network of authorised dealers who offer both pre- and post-sales support and services.



M A D E I N B R I T A I N



The information indicated in this brochure is not binding. The models described may be modified without notice. Drawings and photos may refer to equipment that is optional. Spare parts and machine availability is subject to stock. Engine power figures are maximum net output at 3600rpm. Actual engine performances may be affected by accessories (intake and exhaust line, charging, cooling fan, etc.), application, ambient operating conditions (temperature, humidity, and altitude) and other factors.

19/10/2022

Tracmaster Ltd

Units 6-7 Winterpick Business Park | Hurstpierpoint Road | Wineham | Henfield | BN5 9BJ
Tel. +44 (0)1444 247689
E: info@tracmaster.co.uk

www.tracmaster.co.uk

