


SMR | Air Pressure Switches

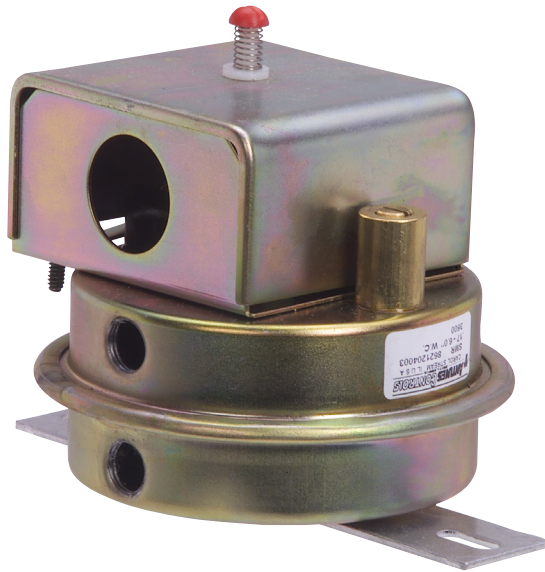

SMR


The SMR air differential switch features a convenient manual reset button and three range scales. It is made of sheet metal and is compact and easy to install.

FEATURES

- Sensitive diaphragm.
- Snap-action electrical switch S.P.D.T. rated at 10 amps.
- Three range scales—from .17" W.C. to a maximum of 12" W.C.
- Easy to install.
- Cost-effective pricing.
- Manual reset.

SMR | Air Pressure Switches


Dimensions

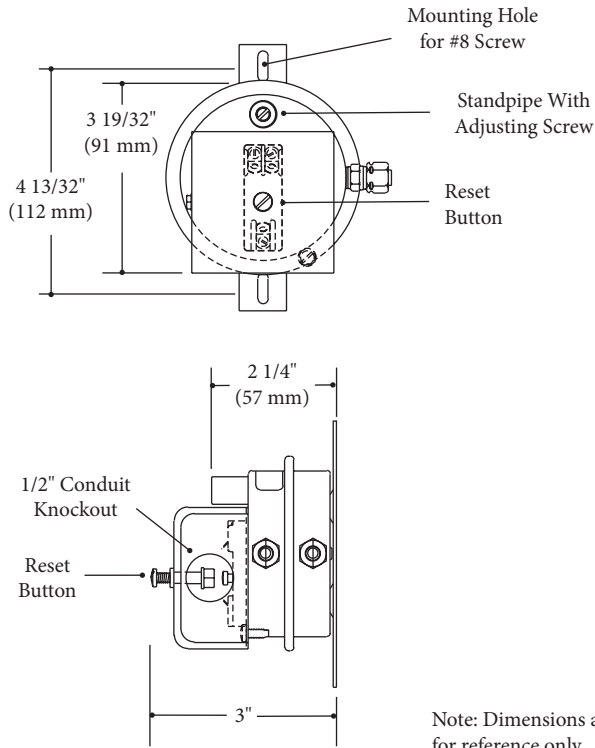

Mounting

Standard mounting bracket is shown. For additional mounting arrangements, contact the factory.

Inlet Connections

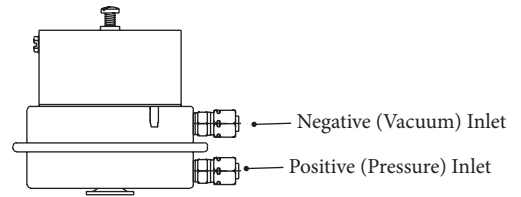

Electrical

10A @ 125 VAC.; 8A @ 250 VAC.; 7A @ 277 VAC.
(Resistive); 1/8HP @ 125 VAC; 1/4HP @ 250 VAC.
Pilot Duty, 125VA @ 125/277 VAC.

Shipping Weight

1 lb. (45 kg)

Specifications

All Models	Optional Fittings
Max. Surge Pressure 20" W.C.	1/4" Barb
Max. Ambient Temp. 170°F (77°C)	1/4" Tube
Max. Ambient Temp. -40°F (-40°C)	1/4" Compression

Pressure switch purchases shall be governed by the terms located at www.antunes.com/terms.

P/N 1020378 Rev. C 09/16



Antunes delivers a complete range of countertop cooking equipment and water filtration solutions to foodservice operations around the world. Learn more about Antunes and its products at www.antunes.com.

U.S. Headquarters
Carol Stream, Illinois
Phone: (630) 784-1000
Toll Free: (800) 253-2991
Fax: (630) 784-1650

China Facility
Suzhou, China
Phone: 86-512-6841-3637
Toll Free: 86-512-6841-3907
Fax: 400-0-7878-22