


## ROMET

# Rotary Gas Meters

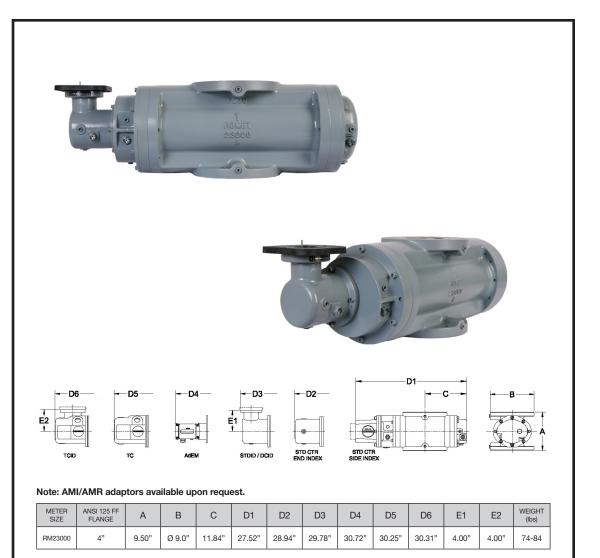

# RM23000 - IMPERIAL

## **TECHNICAL SPECIFICATION**


Connection (Flanged)	ANSI 125 FF	4"
MAOP	(psig)	175
Flow Capacity	(cfh)	23000
Rangeability* (up to 1:160 @ atmospheric condition)		1:160
Start Rate	(cfh)	17.5
Stop Rate	(cfh)	12.0
Differential @ 100% Flow	(I.W.C.)	2.40
Instrument Drive Rate	(cf/rev)	100
LF Pulser (Optional)	(cf/pulse)	100

\*Note: It should be noted, that moving parts in the meters with greater rangeability ratio are made to high class accuracy and tight tolerances.

Improper installation, stresses on piping system due to temperature changes, settling and gas conditions can create a risk of meter rejection.

### CORRECTED FLOW CAPACITY AND TYPICAL ACCURACY GUIDE

RM23000 METER (SCFH)		
Gauge Pressure P.S.I.G. 0.25	RM23000 Qmax = 23000ft <sup>3</sup> /hr	
2	24046	
5	30292	
10	38099	
15	45906	
20	53714	
25	61521	
50	100557	
75	139593	
100	178629	
125	217665	
150	256701	
175	295737	

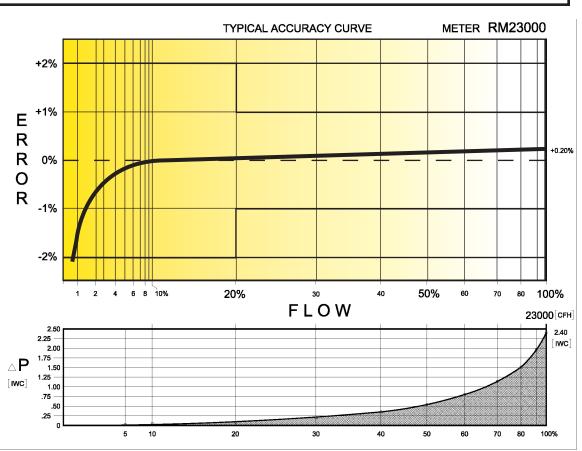





#### GAS METERS AND ELECTRONIC INSTRUMENTS

Phone 905-624-1591 USA 1-800-387-3201 www.rometlimited.com • email: romet@rometlimited.com The values quoted are typical of normal production. They do not constitute a specification. Romet Limited reserves the right to change any information in this literature without notice. All of the information and data in this literature has been carefully compiled and thoroughly checked. However, Romet Limited will not assume responsibility for any possible omissions or errors.

ROMET and ROMET & DESIGN are registered trademarks of Romet Limited. Romet Limited's gas metering technology is protected under U.S.Patent No.4,910,519 and 6,453,721 and Canadian Patent No.1,293,568.