


## AC/DC Screw Rail Washer Replacement Kit


Replacement Washers  
for AC/DC Screwdrive Rails

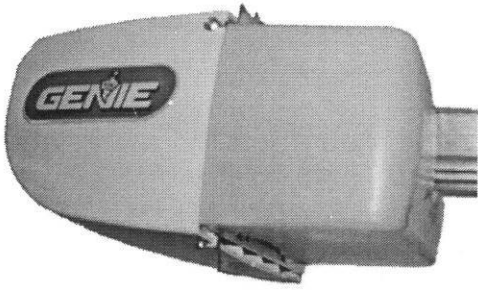

TOOLS REQUIRED: Assorted wrenches or socket & ratchet set, screwdrivers, pliers.

1. UNPLUG operator from 110VAC powersource.
2. REMOVE operator from ceiling and place on clean flat work surface.
3. REMOVE rail assembly from motor head.
4. SLIDE screw out of rail about 6 inches.
5. REMOVE E-ring and old washers assembly.
6. INSTALL replacement washers, bearing, retaining cup and e-ring in correct order. FIG 1.
7. INSTALL rail assembly back into motor head.
8. INSTALL unit per owners manual back onto ceiling.
9. PLUG powercord in to 110VAC powersource.
10. TEST unit per owners manual.

FIG 1

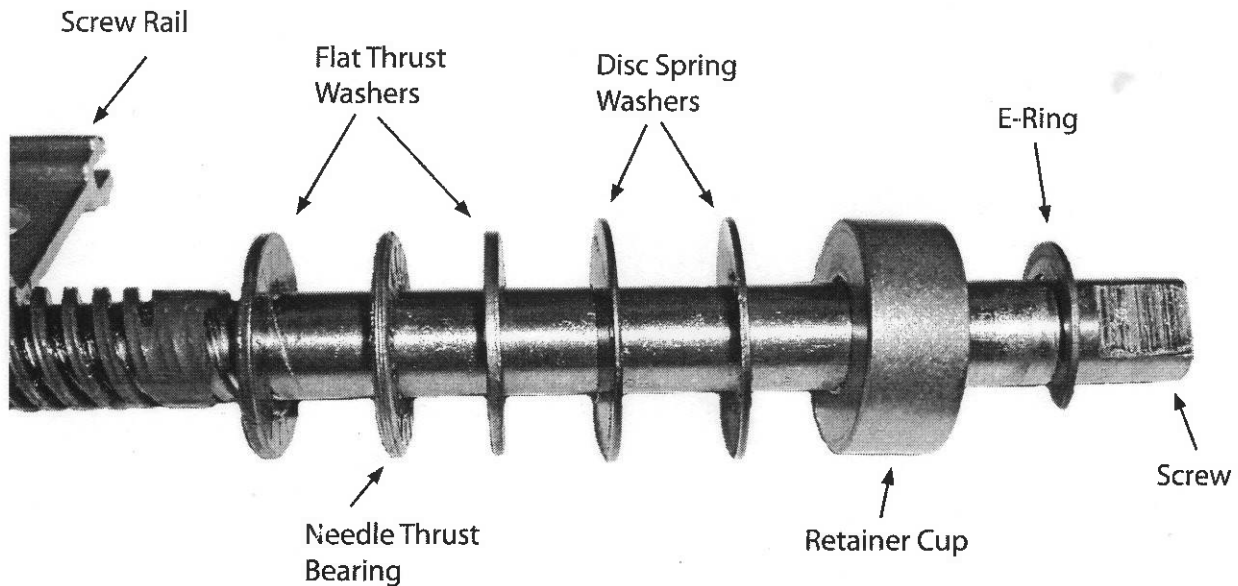

090706

**GENIE** **OVERHEAD CORP.**  
the original since 1921

PRINTED IN THE USA