



THE BRAND YOU TRUST


WALL MOUNT PRE-INSTALL SUPPORT

For Wall Mounted Genie® Models 6072 & 6172




✓ Supported Door Configurations

For use on residential sectional doors, up to a maximum of 850lbs, 18' wide, 14' tall (180 sqft max.) and doors having the following lift types:

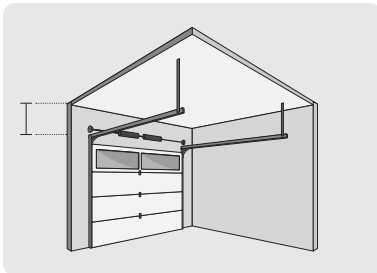

STANDARD RADIUS

This is the most common garage door track. Used for your typical applications.

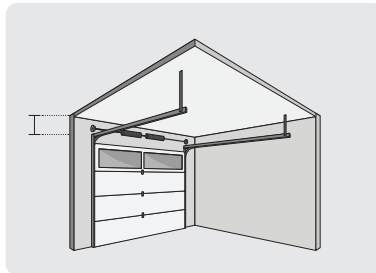

LOW HEADROOM, FRONT MOUNT SPRING

Used when headroom is limited for proper door operation.
• Inside pickup only

Other Supported Door Configurations



- ✓ HIGH LIFT (Up to 84")
- ✓ VERTICAL LIFT

Critical Measurements

This opener can be installed left or right-hand. Critical measurements must be taken to ensure this opener will fit the intended door.

1. This opener will only fit onto torsion shafts, solid or tubular, of 1 inch in diameter with or without a keyway **X**
2. Measure the distance between the torsion bar centerline to the wall. This dimension must be between 2½ in. and 6 in. **A**
3. The torsion bar shaft must protrude no less than 2¼ in. from bearing plate **B**
4. A standard 115 VAC grounded electrical outlet will be required within 5½ ft. of the bottom of the opener **E**
5. Torsion bar centerline to the ceiling must be at least 2¼ in. for clearance **C**
6. End of torsion shaft to side wall clearance must be at least 7 in. for clearance **D**

NOTE: Headroom required is less than smallest standard drum.

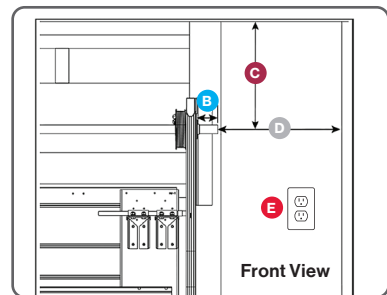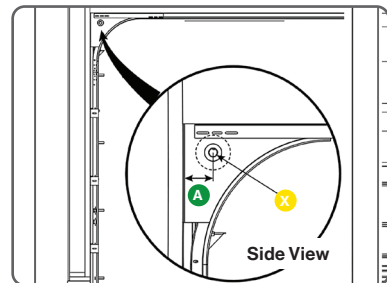

✗ Unsupported Door Configurations

- ✗ ONE-PIECE DOORS
- ✗ DOORS WITH EXTENSIONS SPRINGS
- ✗ LOW HEADROOM WITH OUTSIDE PICKUP