



Deluxe Hammock

Installation Guide



Step 1.

Lay the hammock with non-slip layer face down with the seat anchors directed towards your rear seats. Tuck each of the anchors between seat back and bench.




Step 2.

Lift the seatback section of the hammock up towards the seatback and line the straps up with your headrests. Buckle and pull to tighten.

Step 3.

Lift to align opposite sling section with headrest straps. Buckle and pull to tighten. Take care not to overtighten. The hammock mid-section should be flush against the seat, not suspended above it or undue pressure will be placed on the headrest straps.

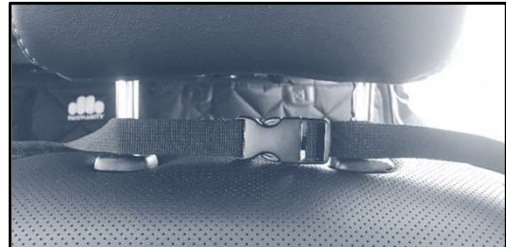

Step 4.

Straighten hammock by adjusting the tension in each of the headrest straps accordingly. Tuck excess strap material behind hammock.



Step 5.

Lift the door guards up and buckle the top strap around the grab handle above the door (adjust straps to ensure hammock edge is resting on seat).



Step 6.

To drop door guards, unzip both sides and release lower buckle.



Tip

Lifting the door guards up and connecting the lower buckle first makes it much easier to zip up the sides.