



# Front Seat Cover

## Installation Guide



### Step 1

Open the cover and slide the inner side flap into the gap between your seat and centre console.



### Step 2

Place the cover down with the seatback section face down and the seat anchor as shown.




### Step 3

Tuck the anchor between the seat and seatback and unclip the seatback strap.



### Step 4

Lift the seatback section up towards the seatback to buckle the top straps around your headrest. Pull to tighten taking care not to overtighten. Tuck the excess strap material behind the cover.

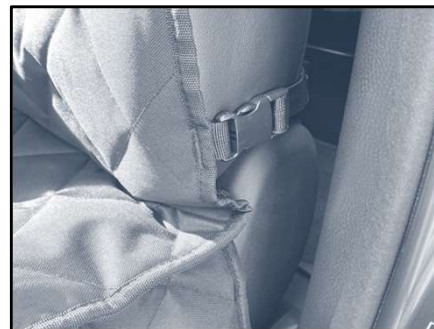

### Step 5

Loosen the seatback strap and bring it all the way around the back of the seat to buckle the cover securely in place. Tighten the strap to remove any slack and adjust the clip to hold the webbing in place.



### Note

*Allow a little bit of room for movement when tightening the seatback strap as your dog will likely lean against the cover when seated. If the belt is too tight, pressure could be placed on the strap stitching.*

### Step 6

Smooth out the footwell section ensuring the pocket wall sits nicely against the front of your seat and the side of the liner meets the inner edge of your vehicles door frame (if applicable).

