

Sound Guard SST

Strong, silent, timesaving, & made of the finest materials, the Westerbeke Sound Guard SST is designed for rugged service and is easy to install.

Engineered for silent operation


The Sound Guard SST cuts noise to enhance your offshore boating experience. Keeping your generator set to a whisper will allow you to enjoy the pleasure of boat ownership in the quiet of your favorite cove. Experience engineering excellence and a new standard of quality that is unheard of. Available for Westerbeke diesel generators 5–32kW, the Sound Guard SST further reduces the average sound intensity of a generator set up to 50% so you can forget you have a set operating.

Serviceability is a snap

To remove any side or end panel requires only a quick snap of 2 latches and you have full access to all four sides. Westerbeke Sound Guards have always been famous for ease of serviceability and now have managed to create an even higher standard. Two access doors are also provided on the service side panel.

Pre-connected for ease of installation

The top panel can be removed in seconds for access to lifting eyes. The base and frame contain bulkhead fittings for all the generator's external connections including the raw water line, siphon break, fuel lines, exhaust line, AC wiring and battery cables. Westerbeke supplies the necessary hoses, cables and hardware to make these connections, allowing quick and easy "plug & play" installations. Only a flat-head screwdriver is required to assemble the frame - the panels require no assembly. Or you can order your new Westerbeke diesel pre-installed in the Sound Guard SST.

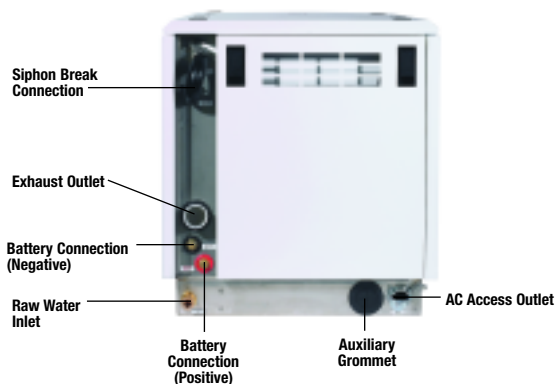

Materials are of the highest quality

The Sound Guard SST consists of 5 powder coated aluminum panels and stainless steel base and frame. The powder coated aluminum panels provide optimum corrosion resistance while reducing the weight of the enclosure. The frame (where attached to the base) and base are likely to be subjected to the most moisture; therefore, are of stainless steel, a highly corrosion resistant metal. Even the rivets and fasteners are of stainless steel. The top panel also covers the side panels to lessen the likelihood that moisture will enter the Sound Guard SST.


Strong, sturdy and rugged

The Sound Guard SST is designed for tough duty. While not recommended to kneel or stand on the unit, some may ignore warnings and do just that. The thick frame and sturdy panels result in a very robust enclosure.

Stylish appearance

The Sound Guard SST is designed to please the eye and resist the corrosion process that age many sound enclosures before their time. Westerbeke believes each customer should be proud of any product's appearance well after the initial purchase.

Sound Guard SST

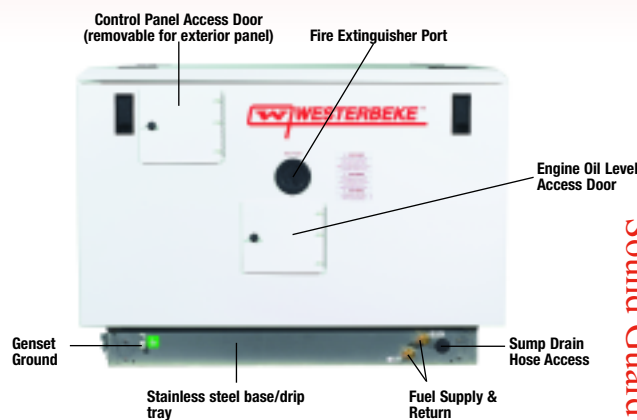

Features:

- **Quiet.** The SST further reduces sound intensity up to 50 percent.
- **Serviceability.** The standard of the industry for serviceability, all 5 panels can be removed in a snap. Only 2 latches per side panel & 4 per top panel. Two access doors also provided on service side panel.
- **Pre-Connected for easy installation.** Base and frame contain bulkhead fittings for all the generator's external connections including the raw water line, siphon break, fuel lines, exhaust line, AC wiring, and battery cables.
- **High quality corrosion resistant materials.** Five easy to clean, lightweight, aluminum powder coated panels supported by a stainless steel base and frame for exceptional corrosion resistance. (Base also serves as a drip tray.)
- **Sturdy.** Stainless steel base and frame provide extra sturdiness.
- **Stylish appearance.**
- **No base latches required to secure panels to base.**
- **Extra space to run fuel lines & cables, etc.** Base is shorter and thinner than side and end panels.

Models	SST Part #	Dimensions (l x w x h)	Weight
4 BCDB, 50Hz 5 BCDB, 60Hz 5.7 BTD, 50Hz 7.6 BTD, 60Hz	49484	33.31 x 21.08 x 22.32 in. 846 x 535 x 567 mm.	71 lbs. 32.2 kilos
6 BTDA, 50Hz 8 BTDA, 60Hz 7.5 BTDA, 50Hz 10 BTDA, 60Hz 10.4 BTD, 50Hz 12.6 BTD, 60Hz	49483	36.06 x 23.20 x 25.32 in. 916 x 589 x 643 mm.	83 lbs. 37.2 kilos
9.4 BTDB, 50Hz 12.5 BTDB, 60Hz 12 BTDC, 50Hz 15 BTDC, 60Hz	49527	39.49 x 23.20 x 25.32 in. 1,003 x 589 x 643 mm.	87 lbs. 39.5 kilos
16 BEDA, 50Hz 20 BEDA, 60Hz 20 BED, 50Hz 25 BED, 60Hz 25 BEDA, 50Hz 32 BEDA, 60Hz	49584	49.64 x 27.20 x 30.82 in. 1,261 x 691 x 783 mm.	134 lbs. 60.8 kilos



PN 49483 Sound Guard SST shown in all images. Location of some features may vary on other models.