



# heat wagon

## Model HVF410HD


### Oil Indirect Fired Heater

- Dual output controls  
High - 412,000 BTU, Low - 272,000 BTU
- Extra large fuel tank, 57 gallons
- Continuous run time over 30 hrs on low  
(20 hours on high)
- Ductable up to 100'
- Capable of recirculation operation  
for improved fuel savings
- Preheated fuel filter for reliable cold starting
- Runs on 15 Amp circuit



#### SPECIFICATIONS

Input	412,000 BTU/Hr (High) 272,000 BTU/Hr (Low)
Fuel	#1 or #2 Diesel, Kerosene, JP-8, Jet A
Fuel Consumption	2.89/1.86 GPH
Electrical	120 Volts 15 amp circuit
Fan	3250 CFM
Thermostat	Standard On/Off
Temp Rise	140°F @ 0°F Ambient (High) 105°F @ 0°F Ambient (Low)
Heat Output	354,000 BTU/Hr (High) 231,000 BTU/Hr (Low)
Flue Diameter	6"
Duct Size	20" with single outlet 16" with dual outlet
Dimensions	83"L x 33"W x 48"H
Weight	456 lbs.



# heat wagon


342 N. 400 E. Valparaiso, IN 46383  
219-464-8818 • 219-462-7985 • [www.heatwagon.com](http://www.heatwagon.com)

Rev. 6-22


## Standard Features



Single Lift Point Bracket




Preheated Fuel Filter

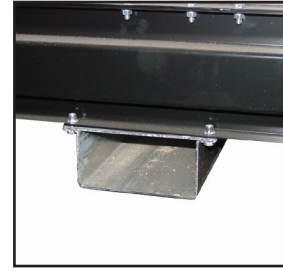

Fork Lift Pockets

## Recirculation Mode

#ACC-AR412 Duct Adaptor

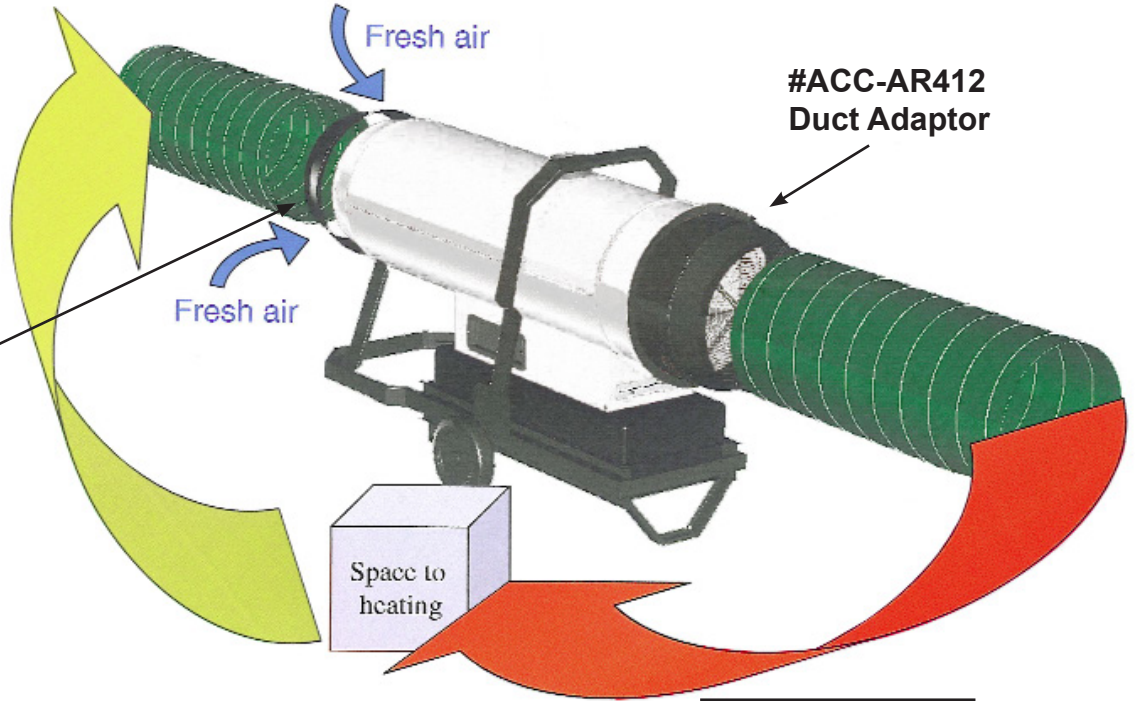

#ACC-AR412 Duct Adaptor



Remote Thermostat (with 50' cord) #ACC-THIDF

## Optional Accessories




Flue Duct Kit (with rain cap) #ACC-EF1



Single Outlet Adaptor #ACC-AR401



Duct  
20" x 25' for single outlet #ACC-WD2025  
18" x 25' for 2-way outlet #ACC-WD1825

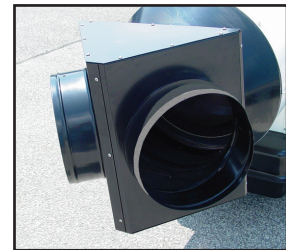

2-way Outlet Adaptor #ACC-AR402