

YellowScan Vx20 series.

The most accurate and high precision UAV LiDAR solution

YellowScan Vx20 is the most accurate fully integrated system from YellowScan's product range.

It can fly up to 100m while maintaining accuracy throughout the point cloud.

Ideally suited for applications that requires sharp and accurate descriptions.



Technologies inside

applanix | RIEGL



Key differentiators

- ▶ High precision point cloud
- ▶ Maximized range
- ▶ Calibrated intensity value
- ▶ Highest accuracy



UAV Integrations

- ▶ Multirotor drones
- ▶ Helicopter drones

System integration options.



▶ Vx20-100

Scanner :
RIEGL miniVUX-1UAV



▶ Vx20-200

Scanner :
RIEGL miniVUX-2UAV



▶ Vx20-300 NEW

Scanner :
RIEGL miniVUX-3UAV

Package includes.

✓ Hardware:

- ▶ YellowScan Vx20-100 / 200 / 300
- ▶ Rugged pelicase
- ▶ Charger and 2 batteries
- ▶ GNSS antenna and cable
- ▶ 2 USB flash drives
- ▶ Documentation

✓ Services:

- ▶ 1-year unlimited technical support
- ▶ 1-year warranty
- ▶ In-person or online training
- ▶ Boresight calibration certificate

✓ Software:

- ▶ Applanix POSPac UAV, to post-process GNSS and inertial data for highest accuracy
- ▶ YellowScan CloudStation, to generate and visualize your georeferenced point cloud



+ Optional:

- ▶ Stand-alone mounting bracket for DJI M600
- ▶ Mounting bracket with single Sony α6000 camera for DJI M600
- ▶ Mounting bracket with dual Sony α6000 camera for DJI M600
- ▶ Mounting bracket with Micasense Altum camera
- ▶ Warranty and technical support extensions
- ▶ YellowScan LiveStation: the real-time in-flight LiDAR monitoring kit (includes software and 2 radio-modems)
- ▶ Strip Adjustment module: a point cloud enhancing toolbox for the CloudStation software
- ▶ Terrain module: export classified point clouds from the CloudStation software

Technical specifications.

Precision ⁽¹⁾ (3)	1 cm
Accuracy ⁽²⁾ (3)	2.5 cm
Echoes per shot	Up to 5
Laser wavelength	905 nm
GNSS-Inertial solution	Applanix APX-20 UAV

Weight	2.84 kg (6.25 lbs) battery included
Size	L 43 xW 11 xH 17 cm
Autonomy	1.5 hours typ.
Power consumption	25 W
Operating temperature	-20 to +40 °C

Vx20-100	100 kHz
Shots per second	100k over 360°
Scanner field of view	360°
Operating Flight Altitude AGL natural targets ≥20%	100m
Average point density @50m AGL, 5m/s, 90° FOV	50pts/sqm

Vx20-200	100 kHz	200 kHz over 360°
Shots per second	100k over 360°	200k over 360°
Scanner field of view	360°	360°
Operating Flight Altitude AGL natural targets ≥20%	100m	85m
Average point density @50m AGL, 5m/s, 90° FOV	50pts/sqm	100pts/sqm

Vx20-300	100 kHz	200 kHz over 360°	200 kHz over 180°	300 kHz
Shots per second	100k over 360°	200k over 360°	100k over 180°	100k over 120°
Scanner field of view	360°	360°	180°	120°
Operating Flight Altitude AGL natural targets ≥20%	100m	85m	100m	100m
Average point density @50m AGL, 5m/s, 90° FOV	50pts/sqm	100pts/sqm	100pts/sqm	150pts/sqm

(1) Precision, also called reproducibility or repeatability, accounts for the variation in successive measurements taken on the same target.


(2) Accuracy is the degree of conformity of a measured position to its actual (true) value.

(3) One σ @ 50 m, nadir.



Typical mission parameters.

▶ Vx20-100

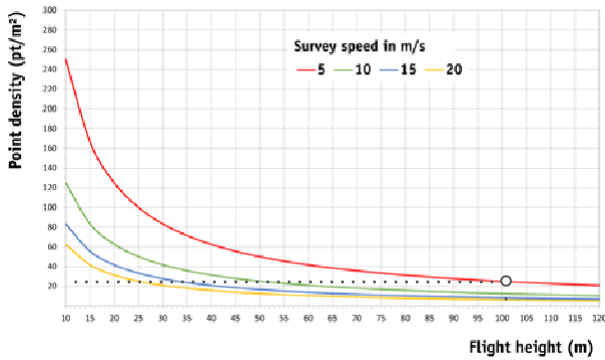


LIDAR UNIT	FLIGHT SPEED	ALTITUDE	POINT DENSITY
Vx20-100	5m/s	100m	25pts/m ²


LIDAR UNIT	FLIGHT SPEED	ALTITUDE	POINT DENSITY
Vx20-200	5m/s	85m	60pts/m ²

LIDAR UNIT	FLIGHT SPEED	ALTITUDE	POINT DENSITY
Vx20-300	5m/s	100m	75pts/m ²

▶ Vx20-200

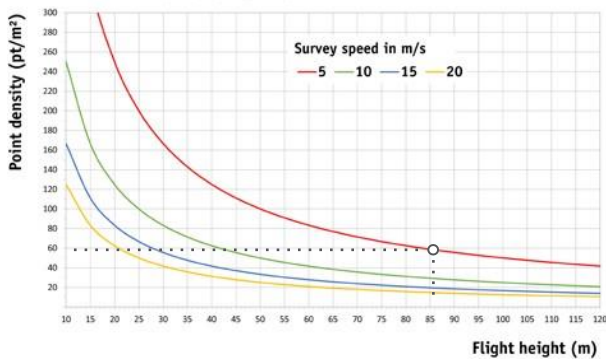


▶ Vx20-300

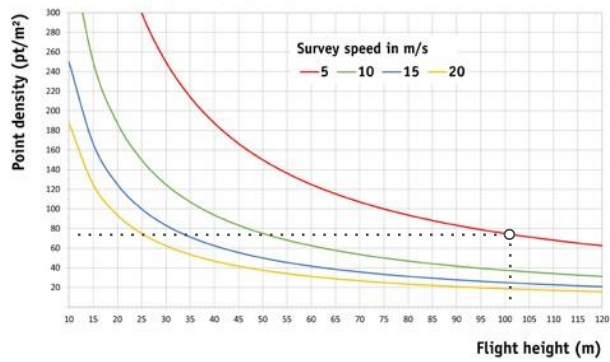


Dimensional drawings.

ⓘ Dimensions expressed in millimeters


▶ Side view

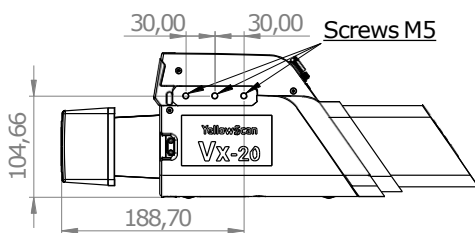

▶ Top view

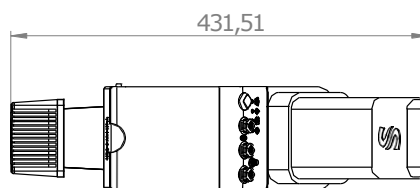

▶ Front view



YellowScan

yellowscan-lidar.com

FR: +33 411 931 400

US: +1 (801) 876-1007

GoUAV

INNOVATIVE FLYING SOLUTIONS

Distributed by:

TeleEye (South Africa) / GoUAV
 Unit 9, 4 Homestead Ave, Bryanston, Johannesburg,
 South Africa
 Tel: (+27) 11 557 9200
 e-mail: Sales@GoUAV.co.za
www.GoUAV.co.za