

客户料号: FC14C13-012

产品图号:

版次


A/0

说明

变更日期

变更者

327 ±10

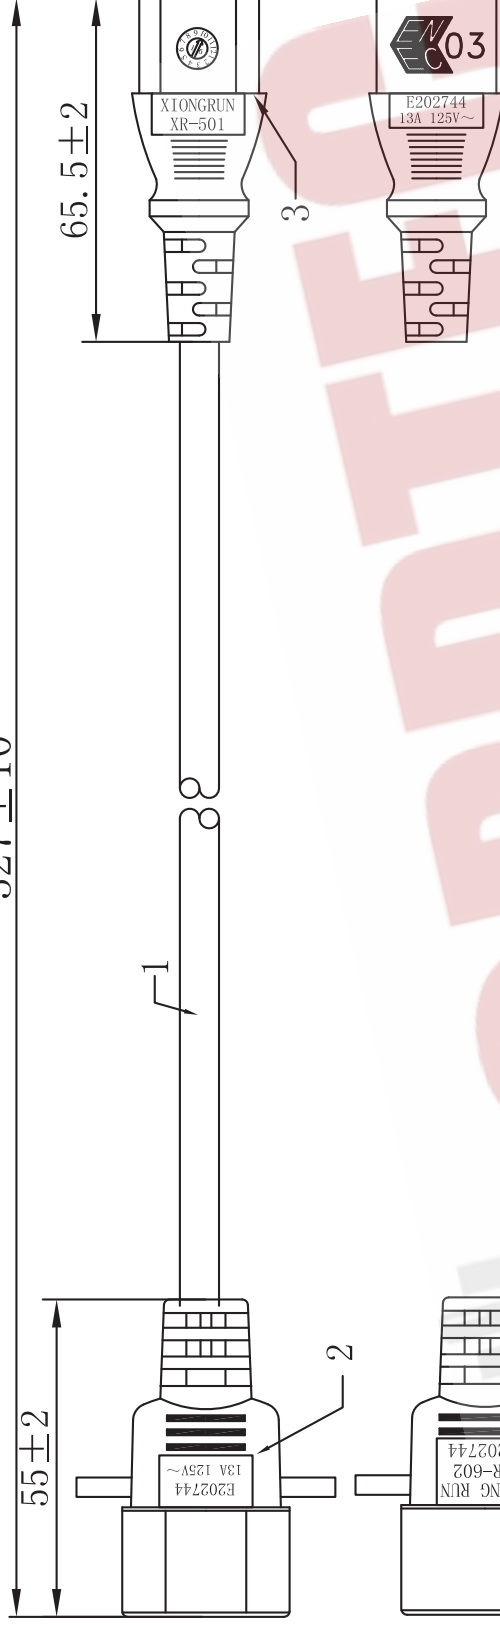

技术要求: requirement:

- 1: 耐压测试: 外高压4200V/S; 内高压1500V/S; 0.5MA
Dielectric voltage :between jacket and conductors 4200V/S between conductors 1500V/S
- 2: 绝缘电阻不小于100兆欧。
Insulation resistance 100MΩ.
- 3: 100%导通OK。
Continuity of lead 100% OK.
- 4: 符合ROHS。
RoHS COMPLIANT.
- 5: ~~10条一扎~~
10pcs/bundle

2022.03.15
Chen Tony

CORDTEC POWER CORPORATION
CONFIRMED

U型入袋, 1PCS/Bag



AC Connectors of Cordtec Power Corp
Main: 1-414-434-2220 Fax: 1-414-323-8386 Text: 1-414-323-3240
Email: Info@cordtecPower.com
Website: CordtecPower.com/ ACWORKS.com

NO.	DESCRIPTION	QTY	UNIT
3	品字尾插座IEC C13 (XR-501), COLOR: 黑色black, PVC	1	EA
2	品字公插座IEC C14 (XR-602-1), COLOR: 黑色black, PVC	1	EA
1	SJTW 16AWGX3C 105°C, COLOR: 黑色black	1	EA