



MARK	MARK	A	B	MARK	A	B
(C)	(C)					
(MS)	(MS)					
(S)	(S)					
(V)	(V)					
(UL)	(UL)					
(JET)	(JET)					
(DPA)	(DPA)					
IP44						
(M)						
(S)						
(V)						
(CBBE)						
(FI)						
(D)						
(KEM)						

EXTEND LENGTH 4190±50 MM
572±10

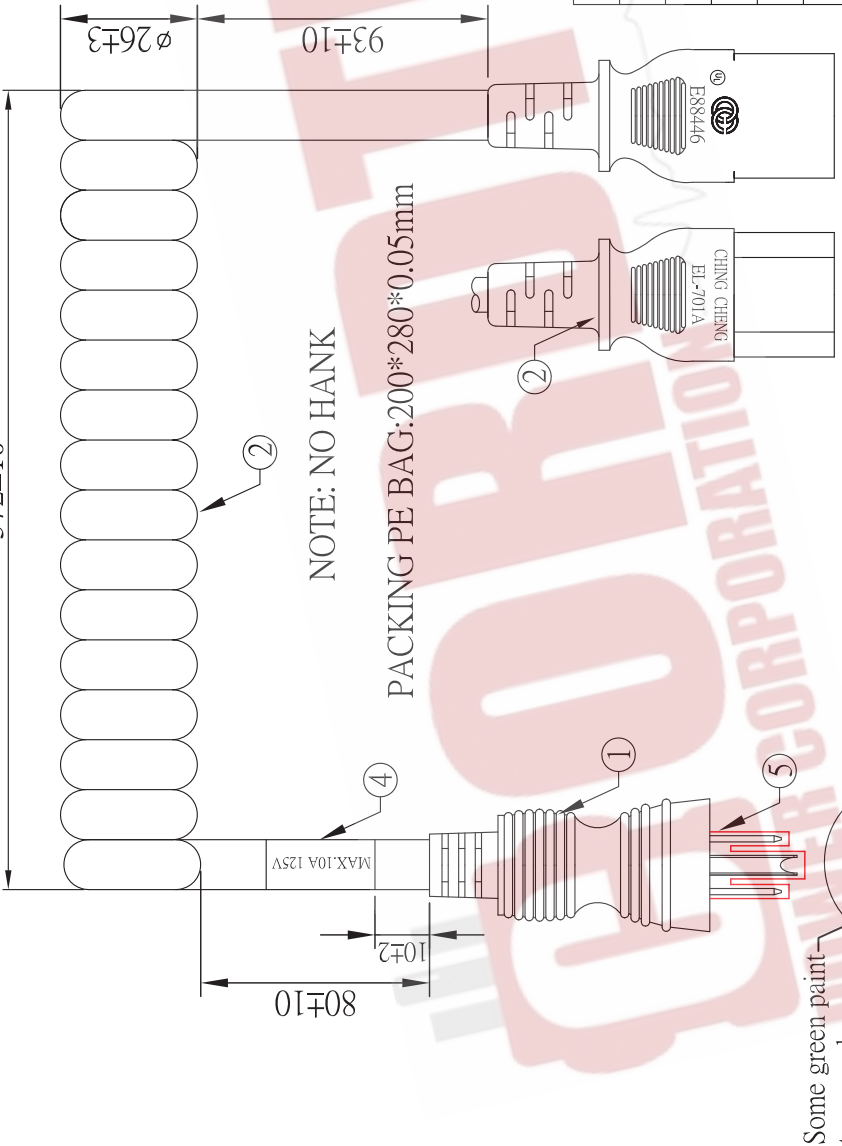

NOTE:
 1. THE CABLE SHALL COMPLY WITH UL 62.
 2. THE MOLDED PLUG SHALL COMPLY WITH NAME 5-15P.
 3. THE MOLDED CONNECTOR SHALL COMPLY WITH IEC/EN 60320/C13
 4. RoHS COMPLIANCE.

CORDTEC POWER CORPORATION
CONFIRMED
 2019.07.28
 Chen Tony

NO.	DESCRIPTION	QTY
⑤	DUST CAP	1
④	LABEL	1
③	MOLDED CONNECTOR:EL-701A(GREY)	1
②	CABLE:SITW 3X18AWG 105°C Pantone Cool Grey 9C	4485mm
①	MOLDED PLUG:EL-304(CLEAR)	1

MATERIAL CONSTITUTE TABLE

CORDTEC
 POWER CORPORATION
 Main: 1-414-434-2220 Fax: 1-414-323-8386
 Text: 1-414-323-3240
 Email: Info@CordtecPowr.com
 Website: CordtecPowr.com / ACWORKS.com

NAME		CORD SET	
CC PART NO.		DRAWING NO.	
UNIT	mm	SCALE	Free
DATE	2019.05.22	DATE	2019.05.22
APPROVED BY		DRAWING BY	LFM
		CHECK BY	

2019.05.22
 张小成