

客户料号:MDC515RC13-V1



产品图号:

版次 A/0

详细描述

变更日期 变更者

*458 ± 30

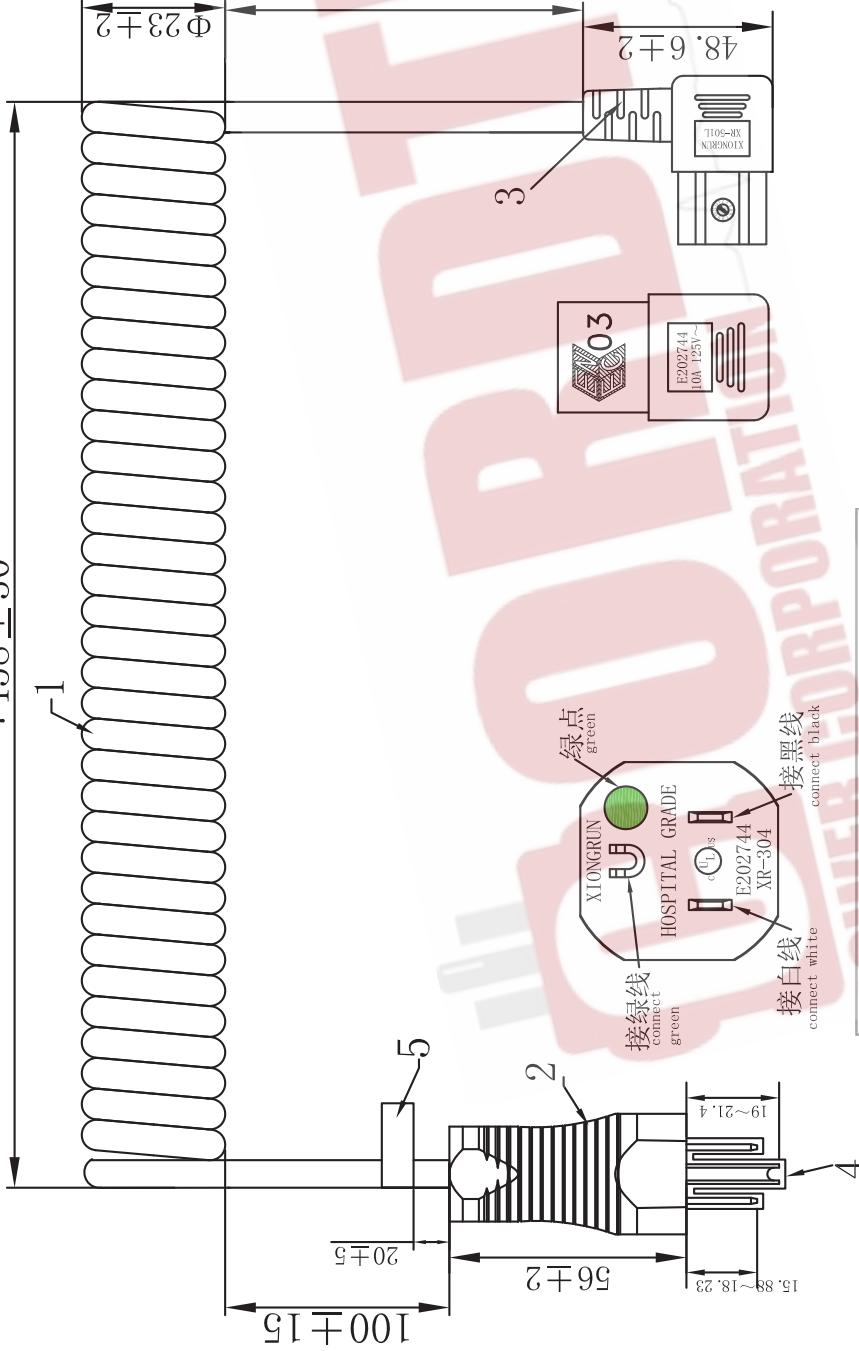

技术要求:requirement:

- 1: 耐压测试:外高压4200V/S;内高压1500V/S; 0.5MA Dielectric voltage :between jacket and conductors 4200V/S between conductors 1500V/S
- 2: 绝缘阻抗不小于100兆欧. Insulation resistance 100MΩ.
- 3: 100%导通OK. Continuity of lead 100% OK.
- 4: 符合ROHS. RoHS COMPLIANT.
- 5: 母插不能有不紧密造成之後露芯线
- 6: 注意尾插颜色按线材颜色配色, 保持一致



NO.	DESCRIPTION	QTY	unit
5	UL标签 (适用美国与加拿大) label	1	EA
4	医疗三插头护套 dust cap	1	EA
3	品字尾插座IEC C13 (XR-50L), COLOR:10C 灰色,gray, PVC	1	EA
2	医疗插 (XR-304-1) HOSPITAL GRADE, COLOR:透明clear, PVC	1	EA
1	SJTW 18AWGX3C 105°C, COLOR:10C 灰色,gray	1	EA

AC Connectors of Cordtec Power Corp
 Main: 1-414-434-2220 Fax: 1-414-323-8386 Text: 1-414-323-3240
 Email: Info@CordtecPower.com
 Website: CordtecPower.com/ ACWORKS.com