

# TEMPORARY POWER SOLUTIONS

## TRANSFER SWITCH INLET BOX L14-30

ASL1430PBX



Rating	Pin Config. MALE Power Source	Compact Adapter	Flexible Adapter
<b>15A</b> 125V		 AD515L1430	 S515L1430-012
<b>20A</b> 125/ 250V		 ADL1420L1430	 L1420L1430-018
<b>30A</b> 125V		 ADL530L1430	 L530L1430-018
<b>30A</b> 125V		 ADTTL1430	 TT30L1430-018
<b>30A</b> 125/ 250V		 AD1430L1430	 S1430L1430-018
<b>50A</b> 125/ 250V		 AD1450L1430	 S1450L1430-018

## TRANSFER SWITCH INLET BOX L14-20

ASL1420PBX



Rating	Pin Config. MALE Power Source	Compact Adapter	Flexible Adapter
<b>15A</b> 125V		 AD515L1420	 S515L1420-012
<b>30A</b> 125V		 ADL530L1420	 L530L1420-018
<b>30A</b> 125/ 250V		 ADL1430L1420	 L1430L1420-018
<b>50A</b> 125/ 250V		 AD1450L1420	 S1450L1420-018

## EXTENSION CORD SETS

We offer different length extension cables to help reach your generator from further distances.

	<b>NEMA 5-15P</b> 	15/20AEX-010 (10 Ft.) 15/20AEX-025 (25 Ft.) 15/20AEX-050 (50 Ft.)
	<b>NEMA 5-20P</b> 	S520PR-010 (10 Ft.) S520PR-025 (25 Ft.) S520PR-050 (50 Ft.)
	<b>NEMA L5-20P</b> 	L520PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet.
	<b>NEMA 6-20P</b> 	S620PR-010 (10 Ft.) S620PR-025 (25 Ft.) S620PR-050 (50 Ft.)
	<b>NEMA L6-20P</b> 	L620PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet.
	<b>NEMA L14-20P</b> 	L1420PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet.
	<b>NEMA L5-30P</b> 	L530PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet.
	<b>NEMA TT-30P</b> 	TT30PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet.

### GENERATOR TIPS

1. Never use your generator in your home, office, garage, carport or screen porch. The exhaust can cause sickness or even death.
2. Keep your generator at least 10 feet from your house. The exhaust can melt your vinyl siding.
3. Use a battery-powered Carbon Monoxide detector when running your generator.
4. NEVER plug your generator into your home outlet.
5. NEVER operate under wet conditions. Try to protect the generator from rain and snow.

*Tips from the National Safety Council [www.NSC.org](http://www.NSC.org)*

24/7 Customer Service (414) 434-2220

Text Questions to (414) 323-3240

Email: [Info@ACConnectors.com](mailto:Info@ACConnectors.com)

To Purchase: [www.ACWORKS.com](http://www.ACWORKS.com)

Version 11, ©2019 Cordtec Power Corp.



CONTACT US IF YOU NEED HELP.

# TEMPORARY POWER SOLUTIONS

## TRANSFER SWITCH INLET BOX L5-30

ASL530PBX



Rating	Pin Configuration Male Power Source	Compact Adapter	Flexible Adapter
15A	125V 	AD515L530	S515L530-018
	125V 	AD520L530	S520L530-018
20A	125V 	ADL520L530	L520L530-018
	125V 	ADTTL530	TT30L530-018
30A	125V 	ADL1430L530	L1430L530-018
	125/ 250V 		

## EXTENSION CORD SETS



NEMA L6-30P



L630PR  
Available in 10, 25, 50, 75, 100 feet.



NEMA L14-30P



L1430PR  
Available in 10, 25, 50, 75, 100 feet.



NEMA SS1-50P



SS1PR  
Available in 10, 25, 50, 75, 100 feet.



NEMA SS2-50P




TESS2  
Available in 10, 25, 50, 75, 100 feet.

## TRANSFER SWITCH INLET BOX CS6365

A550APBX



Rating	Pin Configuration Male Power Source	Compact Adapter	Flexible Adapter
15A	125V 	ADTE515	TESS15-018
20A	125/ 250V 	ADTEL1420	TEL1420-018
	125V 	ADTEL530	TEL530-018
30A	125/ 250V 	ADTEL1430	TEL1430-018
	125/ 250V 		

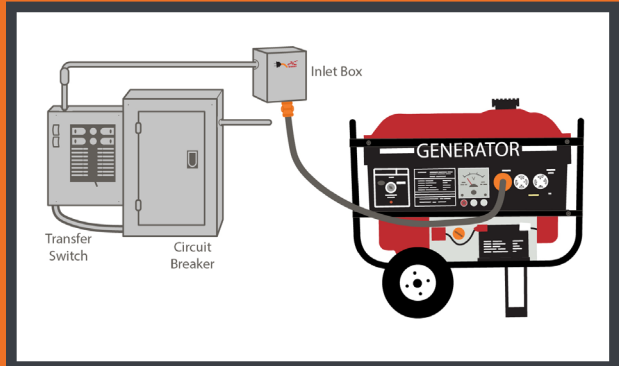

Plug one end of your cable into the generator and the other end into your AC WORKS® adapter. Plug the adapter into the inlet box. The inlet box is wired to the transfer switch, which is wired to your circuit breaker or chosen power load.

If you have questions regarding the connection of AC WORKS® inlet box or power adapters, please contact our customer service team. Our customer service is available 24/7 every day. If you are unsure about your electrical contact a certified electrician to install the inlet box for you.

Visit us on Facebook @ACWorksConnector  
Follow us on Twitter @AC\_Connectors  
Subscribe to our YouTube Channel: AC WORKS®

NEED HELP?

24/7 Customer Service (414) 434-2220  
Text Questions to (414) 323-3240  
Email: Info@ACConnectors.com  
To Purchase: www.ACWORKS.com  
Version 11, ©2019 Cordtec Power Corp.

