

TEMPORARY POWER SOLUTIONS

TRANSFER SWITCH INLET BOX L14-30

ASL1430PBX



| Rating | Pin Config. MALE Power Source | Compact Adapter | Flexible Adapter |
|---------------------|-------------------------------|-----------------|------------------|
| 15A 125V | | AD515L1430 | S515L1430-012 |
| | | ADL530L1430 | L530L1430-018 |
| 30A 125V | | ADTTL1430 | TT30L1430-018 |
| | | AD1430L1430 | S1430L1430-018 |
| 50A 125/ 250V | | AD1450L1430 | S1450L1430-018 |

TRANSFER SWITCH INLET BOX L14-20

ASL1420PBX



| Rating | Pin Config. MALE Power Source | Compact Adapter | Flexible Adapter |
|---------------------|-------------------------------|-----------------|------------------|
| 15A 125V | | AD515L1420 | S515L1420-012 |
| | | ADL530L1420 | L530L1420-018 |
| 30A 125/ 250V | | ADL1430L1420 | L1430L1420-018 |
| | | AD1450L1420 | S1450L1420-018 |

EXTENSION CORD SETS

We offer different length extension cables to help reach your generator from further distances.

| | | |
|--|--|---|
| | | NEMA 5-15P 15/20AEX-010 (10 Ft.) 15/20AEX-025 (25 Ft.) 15/20AEX-050 (50 Ft.) |
| | | NEMA 5-20P S520PR-010 (10 Ft.) S520PR-025 (25 Ft.) S520PR-050 (50 Ft.) |
| | | NEMA L5-20P L520PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet. |
| | | NEMA 6-20P S620PR-010 (10 Ft.) S620PR-025 (25 Ft.) S620PR-050 (50 Ft.) |
| | | NEMA L6-20P L620PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet. |
| | | NEMA L14-20P L1420PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet. |
| | | NEMA L5-30P L530PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet. |
| | | NEMA TT-30P TT30PR-010 (10 Ft.) Available in 10, 25, 50, 75, and 100 feet. |

GENERATOR TIPS

1. Never use your generator in your home, office, garage, carport or screen porch. The exhaust can cause sickness or even death.
2. Keep your generator at least 10 feet from your house. The exhaust can melt your vinyl siding.
3. Use a battery-powered Carbon Monoxide detector when running your generator.
4. NEVER plug your generator into your home outlet.
5. NEVER operate under wet conditions. Try to protect the generator from rain and snow.

Tips from the National Safety Council www.NSC.org

NEED HELP?

24/7 Customer Service (414) 434-2220

Text Questions to (414) 323-3240

Email: Info@ACConnectors.com

To Purchase: www.ACWORKS.com

Version 6, ©2019 Cordtec Power Corp.



TEMPORARY POWER SOLUTIONS

TRANSFER SWITCH INLET BOX L5-30

ASINL530P-FC



| Rating | Pin Configuration Male Power Source | Compact Adapter | Flexible Adapter |
|--------|--|-----------------|------------------|
| 15A | 125V 5-15 | AD515L530 | S515L530-018 |
| | 125V 5-20 | AD520L530 | S520L530-018 |
| 20A | 125V L5-20 | ADL520L530 | L520L530-018 |
| | 125V TT30P | ADTTL530 | TT30L530-018 |
| 30A | 125V/250V L14-30 | ADL1430L530 | L1430L530-018 |


EXTENSION CORD SETS

| | |
|---|---|
| NEMA L6-30P L630PR Available in 10, 25, 50, 75, 100 feet. | NEMA L14-30P L1430PR Available in 10, 25, 50, 75, 100 feet. |
| NEMA SS1-50P SS1PR Available in 10, 25, 50, 75, 100 feet. | NEMA SS2-50P TESS2 Available in 10, 25, 50, 75, 100 feet. |

TRANSFER SWITCH INLET BOX CS6365



| Rating | Pin Configuration Male Power Source | Compact Adapter | Flexible Adapter |
|--------|--|-----------------|------------------|
| 15A | 125V 5-15 | ADTE515 | TES515-018 |
| 20A | 125V/250V L14-20 | ADTEL1420 | TEL1420-018 |
| | 125V L5-30 | ADTEL530 | TEL530-018 |
| 30A | 125V/250V L14-30 | ADTEL1430 | TEL1430-018 |

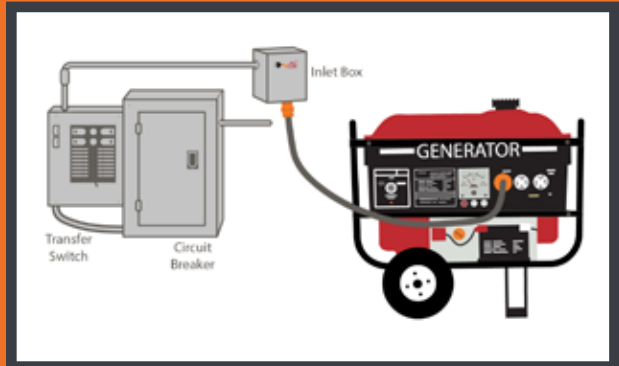

Plug one end of your cable into the generator and the other end into your **AC WORKS®** adapter. Plug the adapter into the inlet box. The inlet box is wired to the transfer switch, which is wired to your circuit breaker or chosen power load.

If you have any questions regarding the connection of your **AC WORKS®** inlet box or power adapter please contact our customer service department 24 / 7 or contact a certified electrician to install it for you.

Visit Us on Facebook @ACWorksConnector
Follow Us on Twitter @AC_Connectors
Subscribe to our YouTube Channel: AC WORKS

NEED HELP?

24/7 Customer Service (414) 434-2220

Text Questions to (414) 323-3240

Email: Info@ACConnectors.com

To Purchase: www.ACWORKS.com

Version 6, ©2019 Cordtec Power Corp.

