
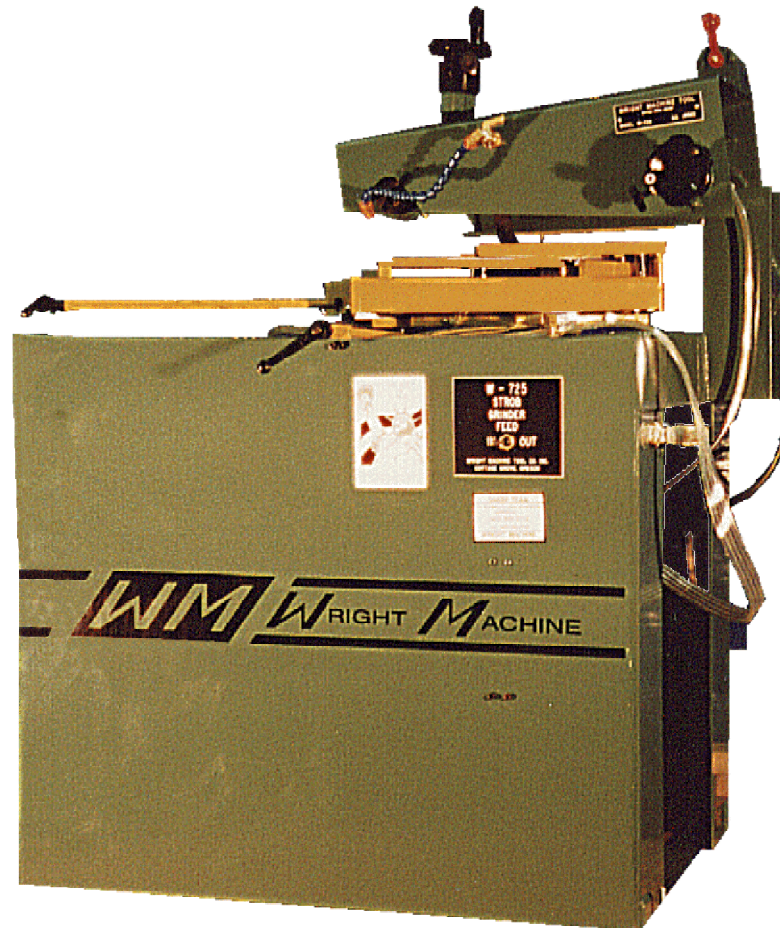

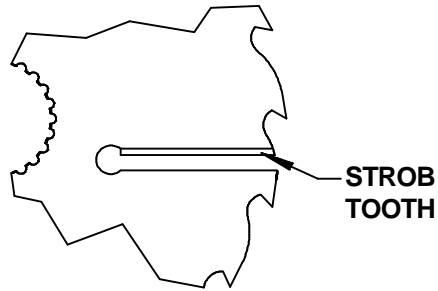


W-725 STROB SHARPENER

SIDE AND
FACE



Sharp strob teeth are necessary for good strob saw performance. The W-725 Strob Sharpener sharpens the face and the sides of strob teeth accurately and quickly. Powered feed with flood coolant reduces labor,

increases accuracy, sharpness, and wheel life. Quick and easy to set up, operate, and maintain, the W-725 has become the industry standard for precision sharpening of strob saws.

SAW SHARPENING SYSTEMS

W-725 STROB SHARPENER

Features

- FULL FLOOD COOLANT
- HYDRAULIC CONTROLLED FEED
- WORK LIGHT
- 3/4 H.P. 1 PHASE SPINDLE MOTOR
- AUTO FEED REVERSAL
- FWD./REV. WHEEL ROTATION
- BALL BEARING LINEAR SLIDES
- FOUR POINT SAW CLAMPING
- FACE OR SIDE WITH ONE WHEEL
- QUICK CHANGE OVER FACE / SIDE
- COMPACT DESIGN
- BUILT TO LAST
- ZERO BACKLASH SYSTEM


Technical

The W-725 makes sharpening of strob teeth a snap. Mounting the saw requires no centering device as the tooth face is simply aligned with the table key. Turning a single handle clamps the saw in four places giving support to both sides of the strob slot. The spindle rotation is set depending on which side is to be sharpened.

Calibrated infeed knobs make exact set up easy and quick. Start the spindle and coolant then turn the auto reversing power feed on and sharpen the strob in a single pass. When done the power feed stops.

Specifications

Circle saw size	8" TO 40"
Power Consumption	1 KW
Air	2 C.F.M. @ 80 P.S.I.
Voltage std.	230V 1PH 50/60
Ship Weight	800 LBS.
Crate Size	44" X 49" X 62"



MADE IN U.S.A.
PRINTED IN U.S.A.
1995

Specifications and availability subject to change without

WRIGHT MACHINE
365 PALMER AVE.
COTTAGE GROVE, OR.
97424

PHONE: 541-942-3712
FAX: 541-942-0730



See us on the Internet at ...

WWW.WRIGHTMACHINETOOL.COM