

1. SPECIFICATION

- Waterproof Rating: IP68
- Dynamic Guidance Trajectory: Embedded
- Image Sensors: 3089 Color CMD
- HD Mini Dual Mount Car Rear View Camera
- PAL/NTSC Compatible
- Resolution: 600 TV Lines
- Min.Illumination: 0.5 LUX
- Lens Angle: 170°
- Auto Image Adjustment
- Video Output: 1.0 Vpp-75 Ohm
- Power Supply: DC 12V
- Operating Temperature: -20°C-70°C
- Storage Temperature: -30°C-80°C
- Application: Universal

2. Installation Tip



1. Align the camera to the desired location. Make sure it is a safe area to drill into.



2. Tighten the first screw into the body with screw driver



3. Adjust the camera's position according to the actual display on the monitor



4. Align and drill the second screw to the body.



5. Make detailed adjustments and the installation is finished.

2. Installation NOTES




Incorrect



Correct

Caution: The smart rear view camera must be mounted at angle(30°- 40°). It must not be mounted horizontally straight. Otherwise the sensitivity and accuracy will be affected accordingly.

4. WIRING

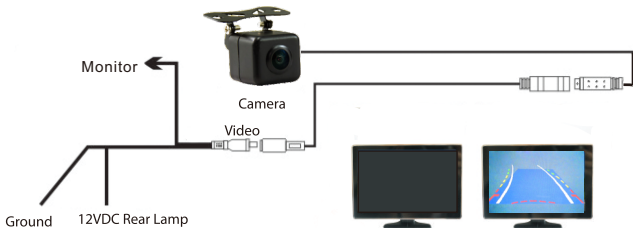

When placing the vehicle in reverse, the monitor will power on automatically and display the image and the intelligent reversing trajectory scale line from the camera. The scale line will move with the car. When ending reverse, the monitor will power off automatically.