

## 4.3" Rearview Mirror Monitor VTB44M User's Manual

Thank you for choosing BOYO




Dear User, Thank you for choosing and using our Rearview Mirror Monitor. We are going to provide the best products and the best services to you.

To insure the best performance and function, please kindly read this manual carefully and install it accordingly.

We reserve all rights for our Rearview Mirror Monitor, including the designs and the software. Any unauthorized copy or translation is prohibited. And the products' specification and information related in the Manual provide the references only, and the content of the Manual will be renewed according to the progress of the products without advance information, and the final explanation rights of the Manual is reserved by us.

### PARTS

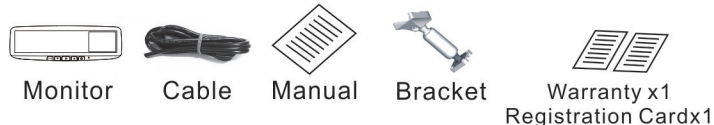


1


### SPECIFICATIONS

Monitor: Digital TFT LCD screen  
Resolution: 480RGB\*272Pixels  
Video input: : Two ways video .  
Dual Mounting Solution: Clip-on and Replace Mounting bracket

### Installation Instruction:

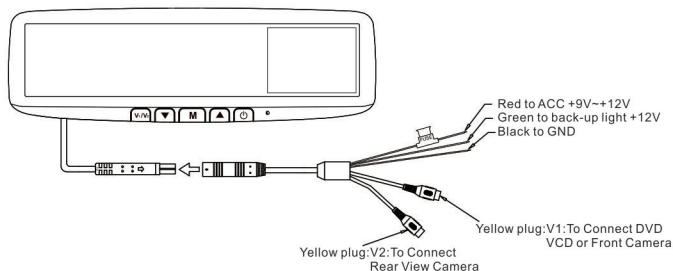

### KEYS OPERATION INSTRUCTION

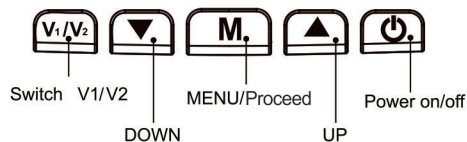

(1) Power on/off key. Press "⏻" to choose power on or power off.

2

(2) "M" menu/Proceed key.

Press "M" for main Menu to choose functions setting. You may able to set up brightness, HUE, contrast, saturation, aspect ratio, language, reset, exit and etc. through the Main Menu. In main Menu interface, Press "▲/▼" to UP/down, then press "M" enter submenu. In main Menu interface, Press "▲/▼" to "EXIT", then press "M" choose the main Menu interface. It will automatically exit the "Main Menu" within 10sec if no operation.

(3) "V1/V2" two video input key.

Press "V1/V2" key to choose V1 or V2. It will show "V1" or "V2" on the top right corner of the Monitor. If no video signal, it will show "NO SIGNAL V1" or "NO SIGNAL V2". It will automatically turn off within 8sec if no signal.

Notes: These are two systems you can choose in Monitor, "Manual" and "Automatic" system. "Manual" means when the vehicle starts, you are pressing "⏻" button to turn on the monitor. "Automatic" means, when the vehicle starts, the monitor will turn on automatically. The factory original setting is "Manual". If you'd like the monitor turn on automatically, press "▲" and "▼" at the same time, then Monitor will show "Automatic" and the setting will change to "Automatic", If it's setting to "Manual" again, do the same as "Automatic".

Make sure to keep your "Manual" mode setting on V1 while the monitor is not in back-up mode.

Here the steps:

- #1. Manually turn on the monitor
- #2. Press V1/V2 Key to proceed V1
- #3. Turn off the screen with power button.

\*\*Green trigger wire should connect to the back-up light (12V).

Notes: if V1 connect front camera, pls choose "Manual" state.

3