

1. BILL OF MATERIAL



Monitor



Manual



RCA Adapter
Cable 4pin



Windshield Mount



Dash Mount Bracket



Power Wire



Camera



65ft Extension Cable

2. SPECIFICATION

Monitor

- Screen Type: 7" LED AHD Display
- 1 Video input and 1 camera input
- Display Format: 16:9
- Power: 5W+
- Power supply: 12VDC ~ 15V
- Reverse trigger wire
- PAL/ NTSC auto switch
- Slim and Sleek Design
- Contrast: 350:1
- Pixel: 1024(H)x600(V)

- ⏻ Power button: Open/ sleeping mode
- ⏮ Volume-Adjust -
Menu: parameter-adjust
- ⏭ Menu
- ⏮ Volume adjust +
Menu: parameter-adjust
- ⏻ Short Press for video input select
Long Press for up, down, right, left image view modes

3. WIRING



4. INSTALLATION

Install the VTC207AHD as follows:

- a. Install the VTC207AHD camera in the desired location, as follows:
 - 1) Fasten the camera mounting bracket, using the 4 self-tapping Philips screws, to the desired mounting surface, as shown in the Step 1 arrows of Figure 1.
 - 2) Position the camera in the camera mounting bracket. Adjust the camera to the proper angle, and then attach the camera using the 4 supplied hex-head machine screws (with washers), as shown in the Step 3 arrows of Figure 1.

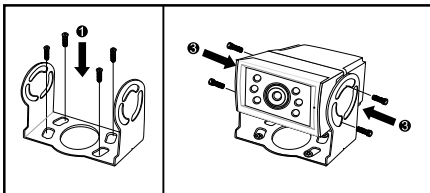


Figure 1. Installing the Camera

- b. Route the extension cable from the camera location to the location of the output device (not supplied), such as a monitor or switcher.
- c. Insert the male connector of the extension cable into the appropriate female audio/video port of the output device (not supplied), such as a monitor or switcher.

CAUTION: To reduce the risk of electrical shock, disconnect the battery from the electrical system of the vehicle before starting the installation.

CAUTION: Before inserting screws into the mounting surface, ensure that the underside of the mounting surface is clear of equipment that might be damaged by the screws.