

1. BILL OF MATERIAL




2. SPECIFICATIONS

4. Installation Tip

- High sensitive 1/4" HD Color CMOS Sensor
- Reverse/ Non-reverse image selectable
- Parking guide line on/off selectable
- Waterproof (IP67)
- 170° wide viewing angle
- Super sensitive low Lux performance
- 12VDC (Tolerance 9V ~ 16V)
- Pixel: NTSC/PAL 648x488
- 480TV Horizontal Resolution

1. Unscrew the bolts of the car license plate
2. Install the camera bracket to the behind of license plate and lock it in a proper place
3. Adjust the camera angle according to your vehicle

3. WIRING

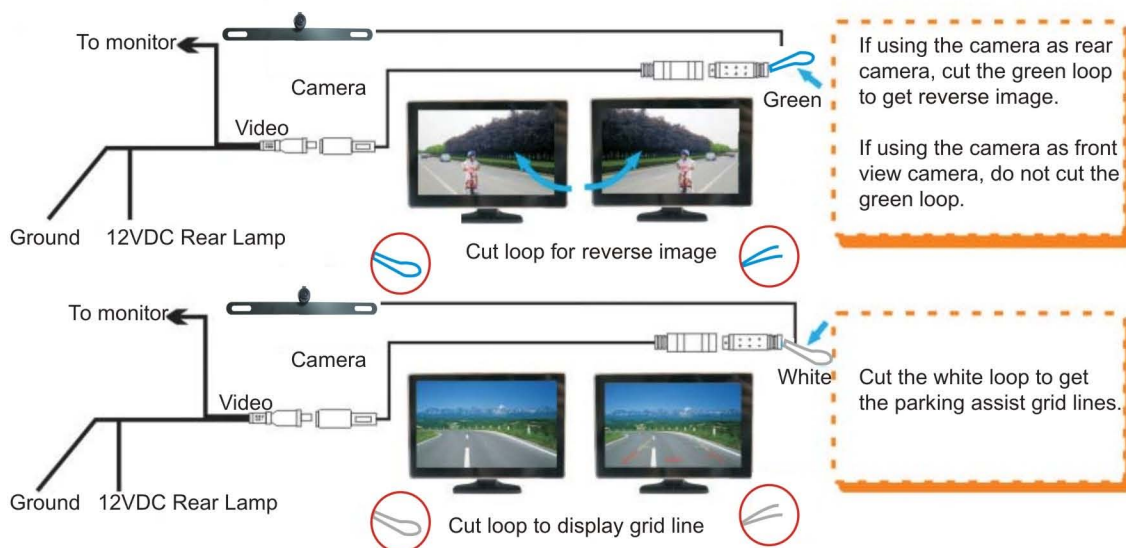

For technical support, contact 888-941-3060 or email info@visiontechamerica.com
WWW.VISIONTECHAMERICA.COM