

1. BILL OF MATERIAL

- Camera x1
- 20ft camera video extension cable (RCA Male to Male) x1
- 4ft power cable x1
- Waterproof o-ring use for flush mounting x1
- Hole saw x1

- Snap ring for use with flush mounting x1
- Tightening ring for use with flush mounting x1
- Heavy duty double sided tape for bracket mount x1
- Hex nut x2

3. Installation Tip

Screws x2

2. SPECIFICATION

- CMOS 7070 Sensor
- 420 TVL Horizontal Resolution
- 640(H) x 480(V) Pixels
- Waterproof (IP68)
- Minimum Illumination: 0.1Lux, 0.0 with IR on
- Reverse/ Non-Reverse image selectable
- Built-in parking guide line selectable
- Includes bracket mount and keyhole mount accessories for dual mount solution.



into



sure it is a safe area to drill



screw to the body.

2. Tighten the first screw into the body with screw driver




3. Adjust the camera's

position according to the actual display on the monitor





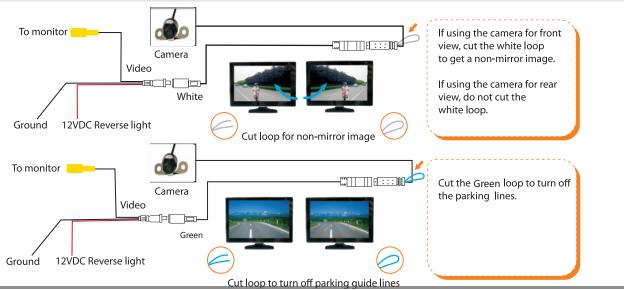

For technical support contact 888-941-3060 or email info@visiontechamerica.com WWW.VISIONTECHAMERICA.COM