



Everett WALL SCONCE

INSTALLATION GUIDE




WEARING GLOVES
IS RECOMMENDED

DANGER: ELECTRIC SHOCK RISK. FOR YOUR SAFETY,
TURN OFF ELECTRICAL POWER BEFORE BEGINNING
INSTALLATION AND USE CAUTION WHEN INSTALLING.

+1 888.399.9905

www.vault-light.com | sales@vault-light.com

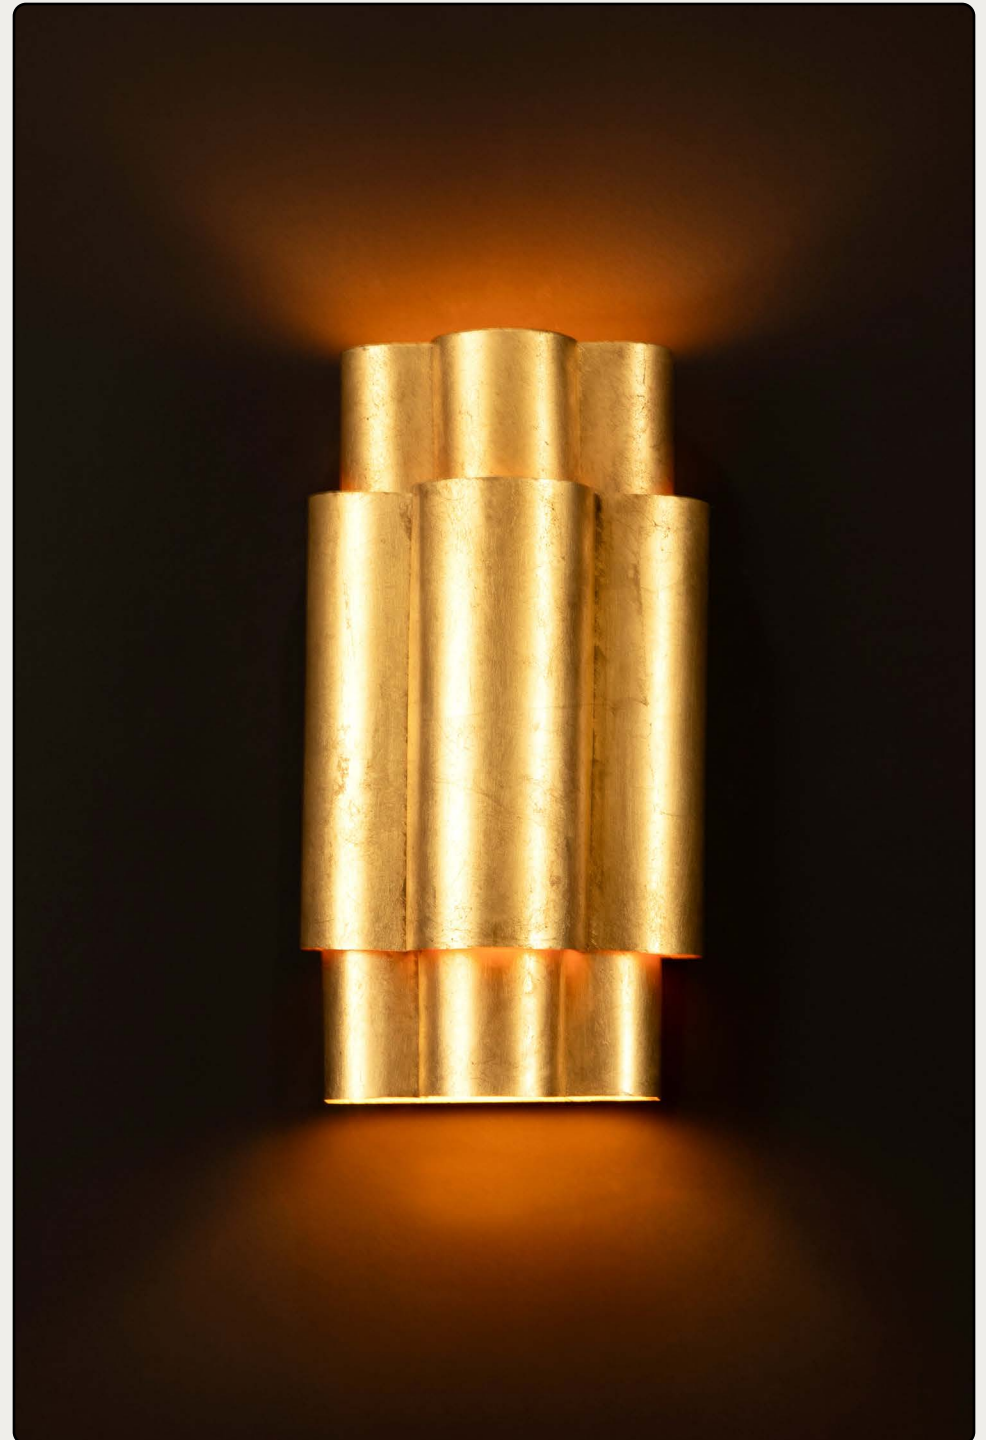

EVERETT GOLD ANTIQUE WALL SCONCE

Steps:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
 2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
 3. Gently pull wiring down from junction box and allow to hang.
 4. Remove the mounting plate(A) from the lamp body (E) by loosening the final (D) .
 5. Attach the mounting plate (A) to wall or junction box using mounting screws(J), and tighten it with a screwdriver.
 6. Pull the electrical cord of "J-box"through the exit hole of the mounting plate(A)
 7. Connect ground wire from wall to ground wire from lamp using wire caps (K).
 8. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
 9. Attach the lamp body (E) to the mounting plate (A) using 2 finals (D), and tighten them.
 10. Insert 1 type B 40W bulb (or/CFL 12W or/LED 10W, not included) into the socket (F).
- DO NOT EXCEED SPECIFIED MAX WATTAGE.
11. Restore power to junction box and test fixture.

Maintenance:

1. Clean surface by soft cloth.
2. Clean glass panels by bland soap-suds.
3. Don't clean it by special depurative(including ammonized products),herwise it will destroy the surface.

Caution:

1. Suggest to installing the fixture by authoritative electrician.
2. Make sure power off before relamping.
3. Keep flammability far away from bulb.
4. If the supply wire destroyed,only the manufacturer or service agent or authoritative electrician can replace it.

