


Buzzer Modul aktiv Datenblatt

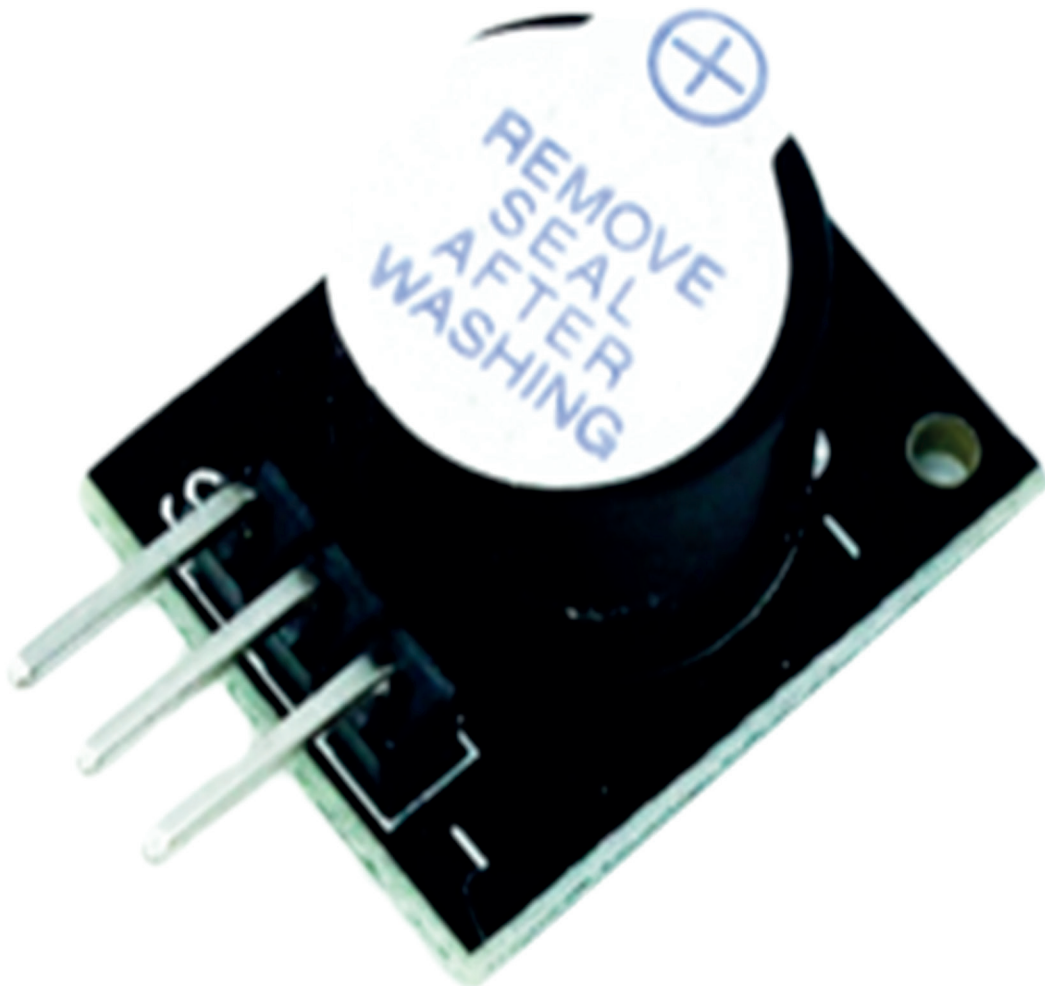

Contents:

- 1. Description**
- 2. Specification**
- 3. Connection Diagram**

1. Description

Active Buzzer module produces a single-tone sound when signal is high.

2. Specifications

Active Buzzer module consists of an active piezoelectric buzzer, it generates a sound of approximately 2.5kHz when signal is high.

Operating Voltage	3.5V ~ 5.5V
Maximum Current	30mA / 5VDC
Resonance Frequency	2500Hz ± 300Hz
Minimum Sound Output	85Db @ 10cm
Working Temperature	-20°C ~ 70°C [-4°F ~ 158°F]
Storage Temperature	-30°C ~ 105°C [-22°F ~ 221°F]
Dimensions	18.5mm x 15mm [0.728in x 0.591in]

3. Connection Diagram

