


NodeMCU LUA Amica V2 Modul mit ESP8266 12E Datenblatt

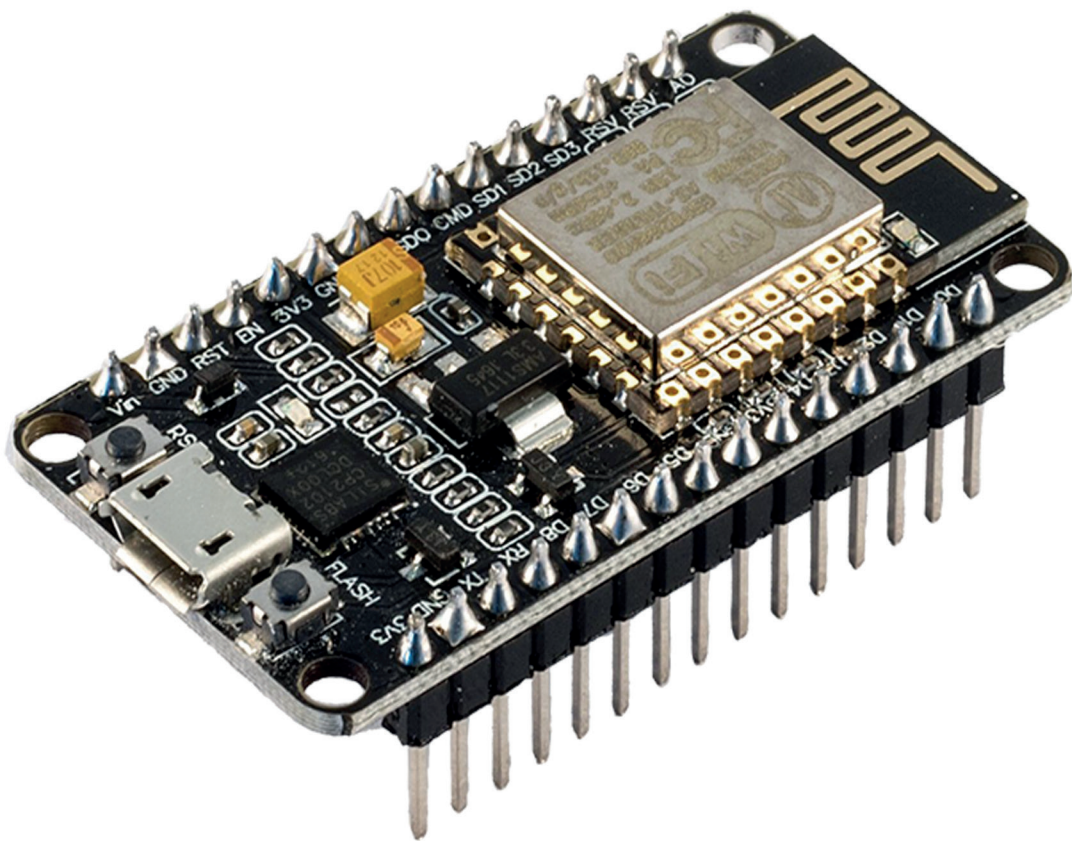

Contents:

- 1. Features**
- 2. Specifications**

1. Features

NodeMCU is an open source IoT platform. It includes firmware which runs on the ESP8266 Wi-Fi SoC from Espressif Systems, and hardware which is based on the ESP-12 module. The term "NodeMCU" by default refers to the firmware rather than the DevKit. The firmware uses the Lua scripting language. It is based on the eLua project, and built on the Espressif Non-OS SDK for ESP8266. It uses many open source projects, such as lua-cjson, and spiffs.

- Breadboard Friendly
- Light Weight and small size.
- 3.3V operated, can be USB powered.
- Uses wireless protocol 802.11b/g/n.
- Built-in wireless connectivity capabilities.
- Built-in PCB antenna on the ESP-12E chip.
- Capable of PWM, I2C, SPI, UART, 1-wire, 1 analog pin.
- Uses CP2102 USB Serial Communication interface module.
- Arduino IDE compatible (extension board manager required).
- Supports Lua (alike node.js) and Arduino C programming language.

Safety Precaution: All GPIO runs at 3.3V !!!

2. Specifications

Wireless Standard	IEEE 802.11 b/g/n
Frequency Range	2.412 - 2.484 GHz
Power Transmission	802.11b : +16 ± 2 dBm (at 11 Mbps) 802.11g : +14 ± 2 dBm (at 54 Mbps) 802.11n : +13 ± 2 dBm (at HT20, MCS7)
Receiving Sensitivity	802.11b : -93 dBm (at 11 Mbps, CCK) 802.11g : -85 dBm (at 54 Mbps, OFDM) 802.11n : -82 dBm (at HT20, MCS7)
Wireless Form	On-board PCB Antenna
IO Capability	UART, I2C, PWM, GPIO, 1 ADC
Electrical Characteristic	3.3 V Operated 15 mA output current per GPIO pin 12 - 200 mA working current Less than 200 uA standby current
Operating Temperature	-40 to +125 °C
Serial Transmission	110 - 921600 bps, TCP Client 5
Wireless Network Type	STA / AP / STA + AP
Security Type	WEP / WPA-PSK / WPA2-PSK
Encryption Type	WEP64 / WEP128 / TKIP / AES
Firmware Upgrade	Local Serial Port, OTA Remote Upgrade
Network Protocol	IPv4, TCP / UDP / FTP / HTTP
User Configuration	AT + Order Set, Web Android / iOS, Smart Link APP