

STAINLESS STEEL FINISH

5 WATT | 250 LUMENS | 2100K (PER BULB)

SKU CODE: BSALT-I-SET-TRI-PD-02-EU

# BASALT 3 DROP PENDANT (EU)

*Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites mouth-blown borosilicate glass and dimmable LED technology, with a stainless steel pendant finish.*

## LAMP

Shape: Custom

Bulb Materials: Borosilicate Glass and Brass Cap

Bulb Finish: Frosted

Fixture Materials:

Lost-wax casted and polished Stainless Steel

Beam angle: 360°

Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V



## DIMENSIONS:

**BULB:**

55 x 219 mm (Width x Length)

**FIXTURE:**

52 x 75 mm (Width x Length)

**SMALL CANOPY:**

250 x 20 mm (Width x Length)


**CABLE:**

400cm (Length)

## PERFORMANCE (PER BULB)

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

## POLAR DIAGRAM

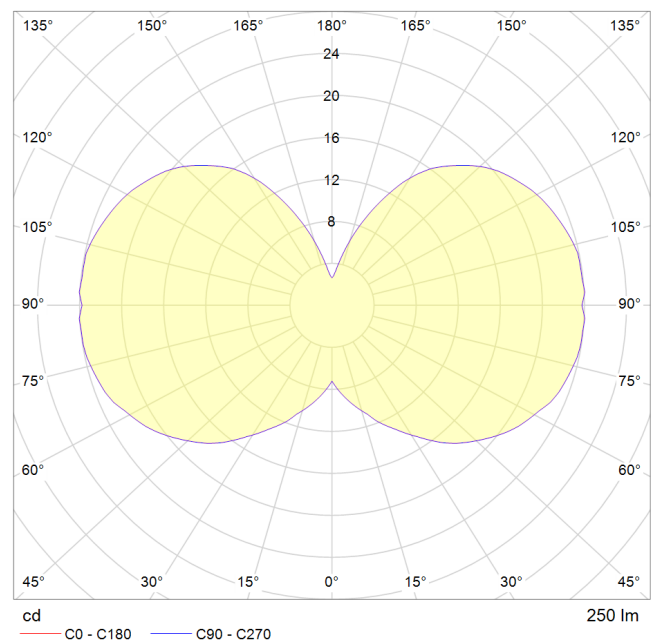

## DIMMING



Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400156481

IES/LDT FILE: Available upon request.



www.tala.co.uk | hello@tala.co.uk

Specification subject to change without notice. Refer to our website for the most recent product documentation.

SOLID BRASS FINISH

5 WATT | 250 LUMENS | 2100K (PER BULB)

SKU CODE: BSALT-I-SET-TRI-PD-01-EU

# BASALT 3 DROP PENDANT (EU)

*Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites translucent mouth-blown borosilicate glass and dimmable LED technology, with a solid brass pendant finish.*

## LAMP

Shape: Custom

Bulb Materials: Borosilicate Glass and Brass Cap

Bulb Finish: Frosted

Fixture Materials: Sand-casted and polished solid Brass

Beam angle: 360°

Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V



## DIMENSIONS:

### BULB:

55 x 219 mm (Width x Length)

### FIXTURE:

52 x 75 mm (Width x Length)

### SMALL CANOPY:

250 x 20 mm (Width x Length)


### CABLE:

400cm (Length)

## PERFORMANCE (PER BULB)

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

## POLAR DIAGRAM

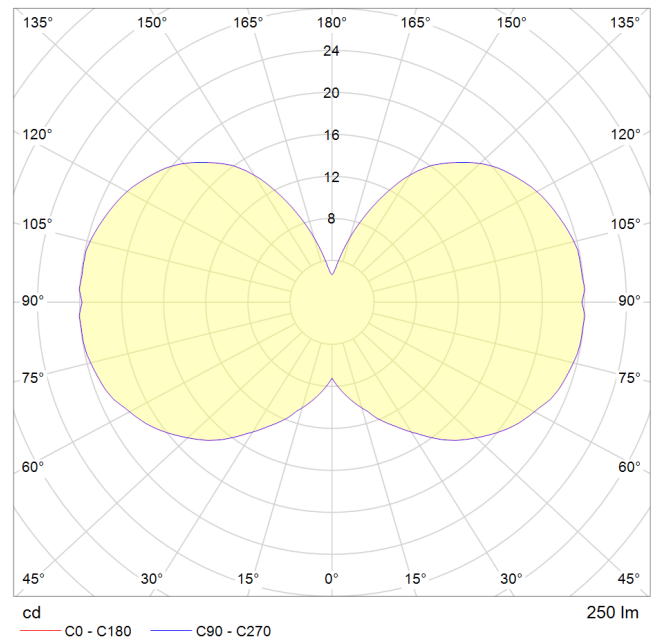

## DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400156467

IES/LDT FILE: Available upon request.

CANOPY:  
IP20

BULBS:  
IP54



www.tala.co.uk | hello@tala.co.uk

Specification subject to change without notice. Refer to our website for the most recent product documentation.