



patent number: ZL200930032857.1

More classic practical function

- Scanning mode: B、2B、4B、B/M、M
- Full field image with 8 levels depth adjustment
- Dynamic range: 27-90dB, visual adjustment
- Local zooming function
- Image storage:100 frames permanent storage, without loss of the image when powered off
- Cine loop: 256 frames
- High-speed USB-A port: Supporting Large-capacity USB flash disk and mouse
- High-speed USB-B port: for image transfer to PC (Optional Case Report Processing Software)




Professional measuring software for veterinary

- Common measurement: distance, circumference, area, volume, etc.
- OB measurement: Bovine, Equine, Ovine, Canine, Feline, Goat, Llama, gestational weeks and expected date.
- Cardio measurement: depth, slope, heart rate, cycle

Configuration

- Standard configuration: (1) Main unit :1pc (2) 6.5MHZ rectal vet probe (multi frequency, without handle) :1pc (3) Internal lithium battery: 2 pcs (4) Charger: 1pc (5) Belt: 1pc (6) Bracket: 1pc (7) Leather case : 1pc (8) Handle freeze switch
- Optional Configuration: 4.0MHz multi-frequency rectal convex Probe、 6.5MHz multi-frequency linear rectal probe (handle)、 3.5MHz multi-frequency convex probe、 7.5MHz high multi-frequency liner probe、 5.0MHz multi-frequency micro convex probe、 car charger、 goggle, etc

Image quality

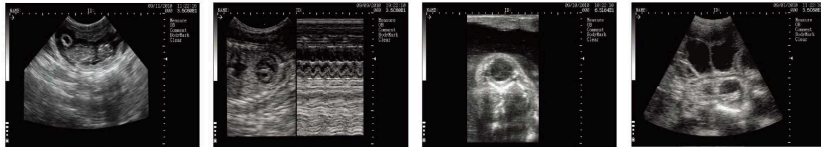

Gravidity of dog which is 30 days Heart of dog which is 50 days Eyeball of cow Gravidity of pig which is 25 days

Optional probe



4.0MHz multi-frequency rectal convex Probe 6.5MHz multi-frequency linear rectal probe (handle) 3.5MHz multi-frequency convex probe 7.5MHz high multi-frequency liner probe 5.0MHz multi-frequency micro convex probe

KX5200V

Full-digital B mode Veterinary Ultrasound Scanner



VERSION NO. — ZL-10-EN5200V-001

InterAktiv Health

17/ 5 Vuko Place Warriewood. NSW 2102

T: 1300 720 912

Info@interaktivhealth.com.au

KAI XIN[®]
 Research Center for Ultrasound Medical
 Application Engineering Technology of
 Jiangsu Province, China

Features



Two large-capacity lithium batteries, about 360 minutes work.



8 kinds of internal Pseudo color display



5.7 Inch high resolution colour TFT LCD monitor forming a clear image under the sunshine for special treatment.



1.1Kg

Weight of main unit is 1.1Kg, small and light



Backpack integration design, convenient for veterinary and farm use



The main unit with the splash-proof, dust-proof function, easy to clean.

X5200V VET



Main unit

Smart design and internal battery of KX5200 make the diagnosis more convenient and bring your new mobile using experience.

Create the health with science and technology