



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L072011802G



Report No: L072011802G **Issue Date:** 7/28/2020

Report Prepared For: Horticulture Lighting Group
752 North State St, #208, Westerville, OH 43082

Model Number: HLG 600 Bspec

Test: Photosynthetic Photon Flux Density (PPFD) values on 5' X 5' grid points

Standards Used: Appropriate part or all test guidelines were used for test performed:
ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition:

1. Grid at mounting height 24", and 36".
2. Lamp centered at center of Grid
3. PPFD measurement is an average of correspondig quadrants.

Sample Arrival Date: 7/22/20

Date of Tests: 7/23/20 - 7/28/20

Seasoning of Sample: No seasoning was performed.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Xitron Digital Power Meter	2801		
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/21
LI-COR Handheld Meter	LI-250A		--
LI-COR Quantum Sensor	LI-190/R		7/31/20

General Information

Manufacturer:	Horticulture Lighting Group
Model Number:	HLG 600 Bspec
Driver Model Number:	INVENTRONICS EUD-600S280DT

Electrical Test Results

Input Voltage (VAC/60Hz):	220.03
Input Current (Amp):	2.7379
Input Power (W):	601.10
Input Power Factor:	0.9978
Current ATHD (%):	4.2%

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:45



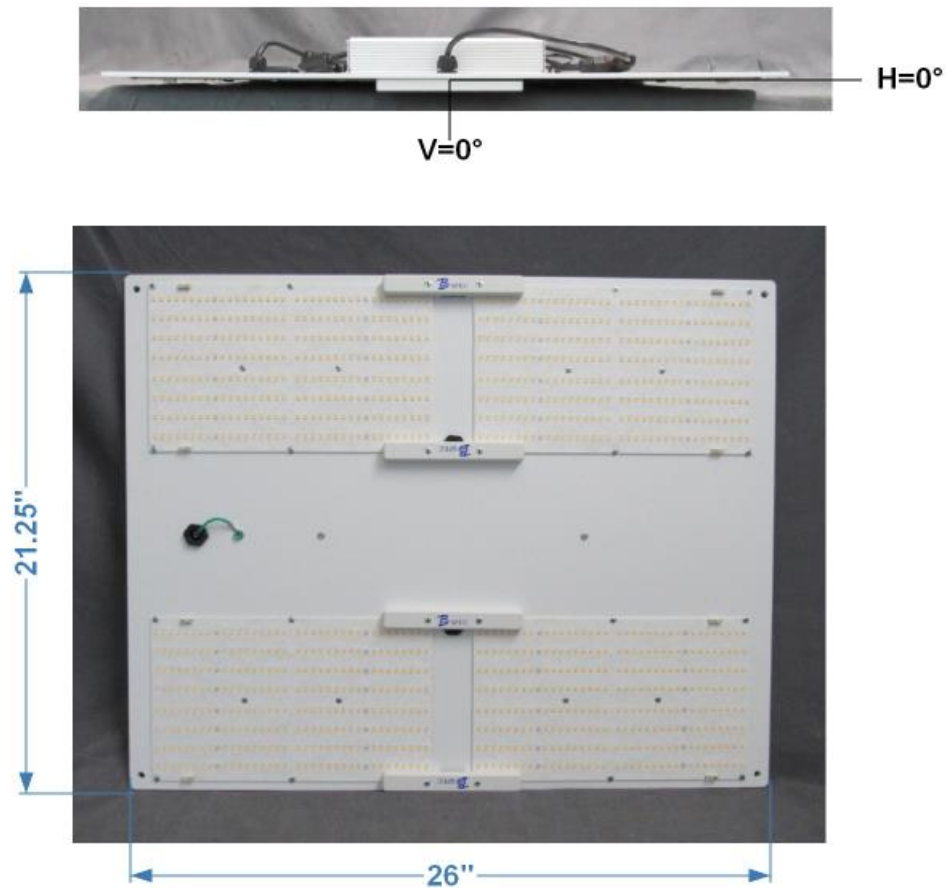


FIG. 1 LUMINAIRE

PPFD Measurement Result at 24" Height - 6 inch square Grid

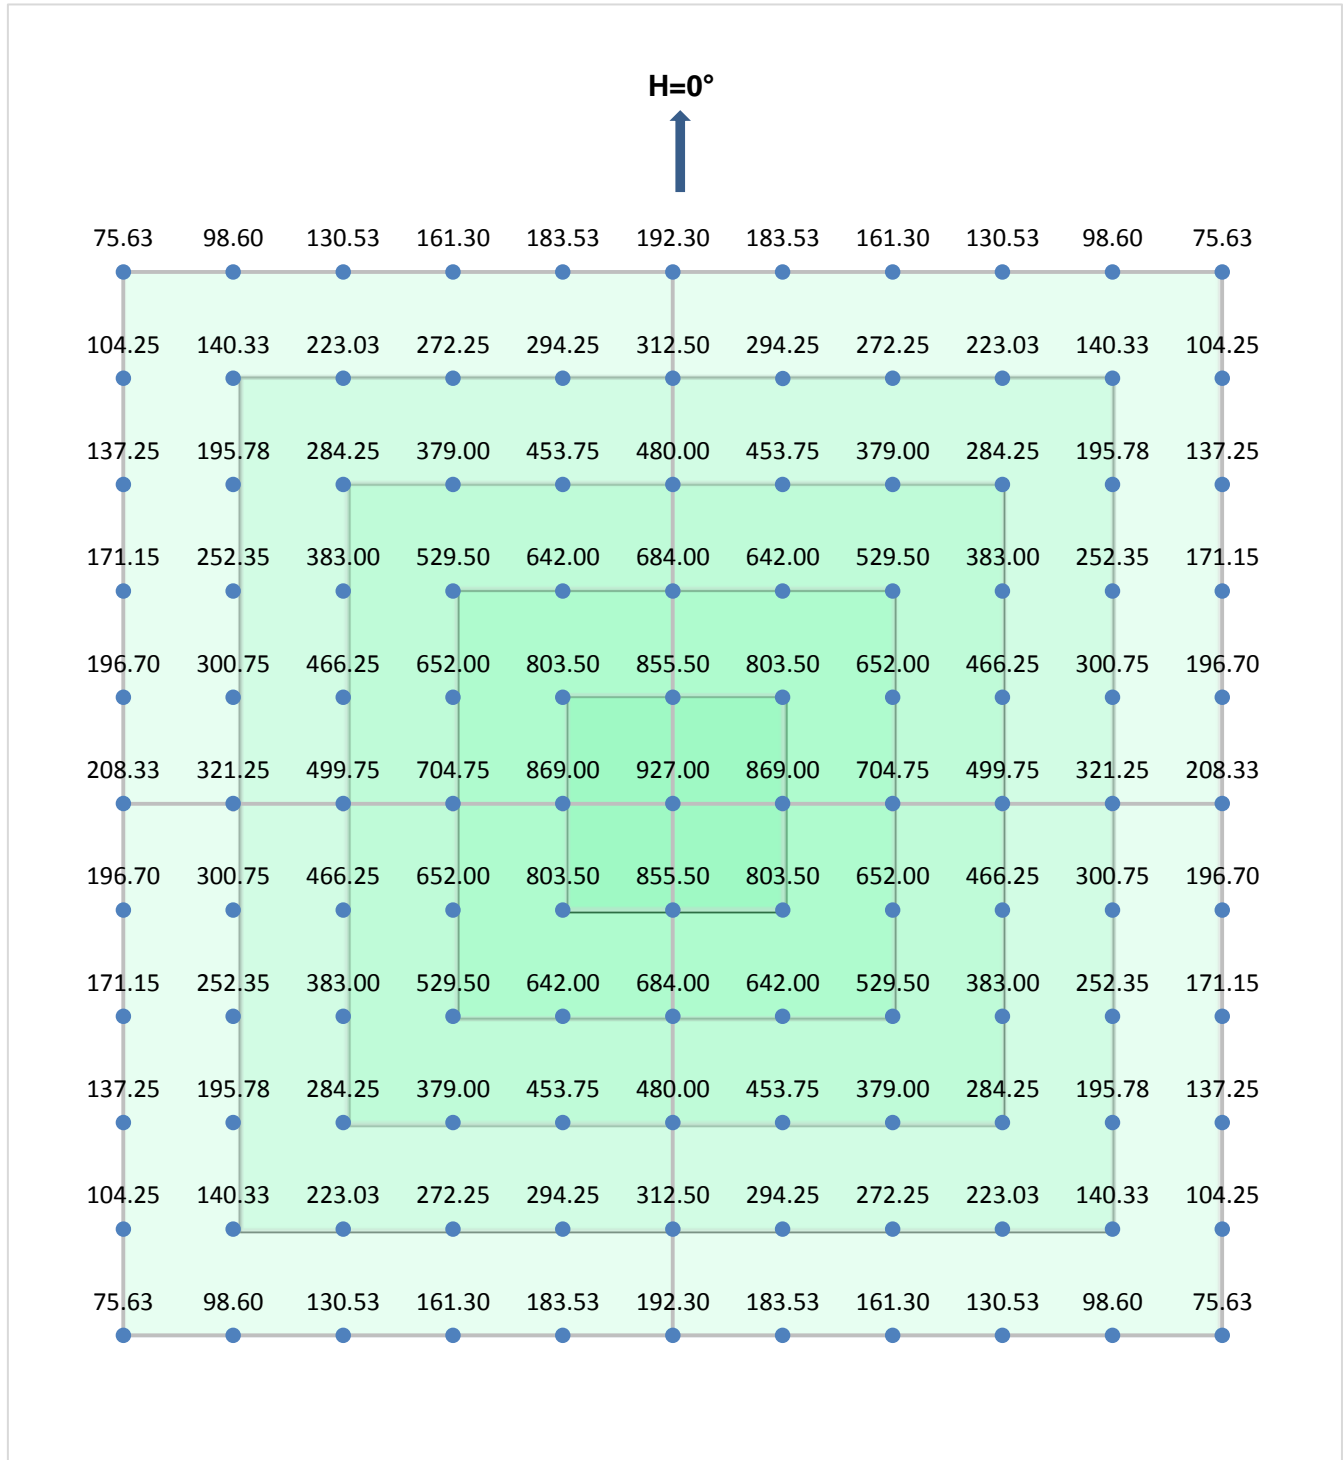

PPFD Measurement Result at 36" Height - 6 inch square Grid

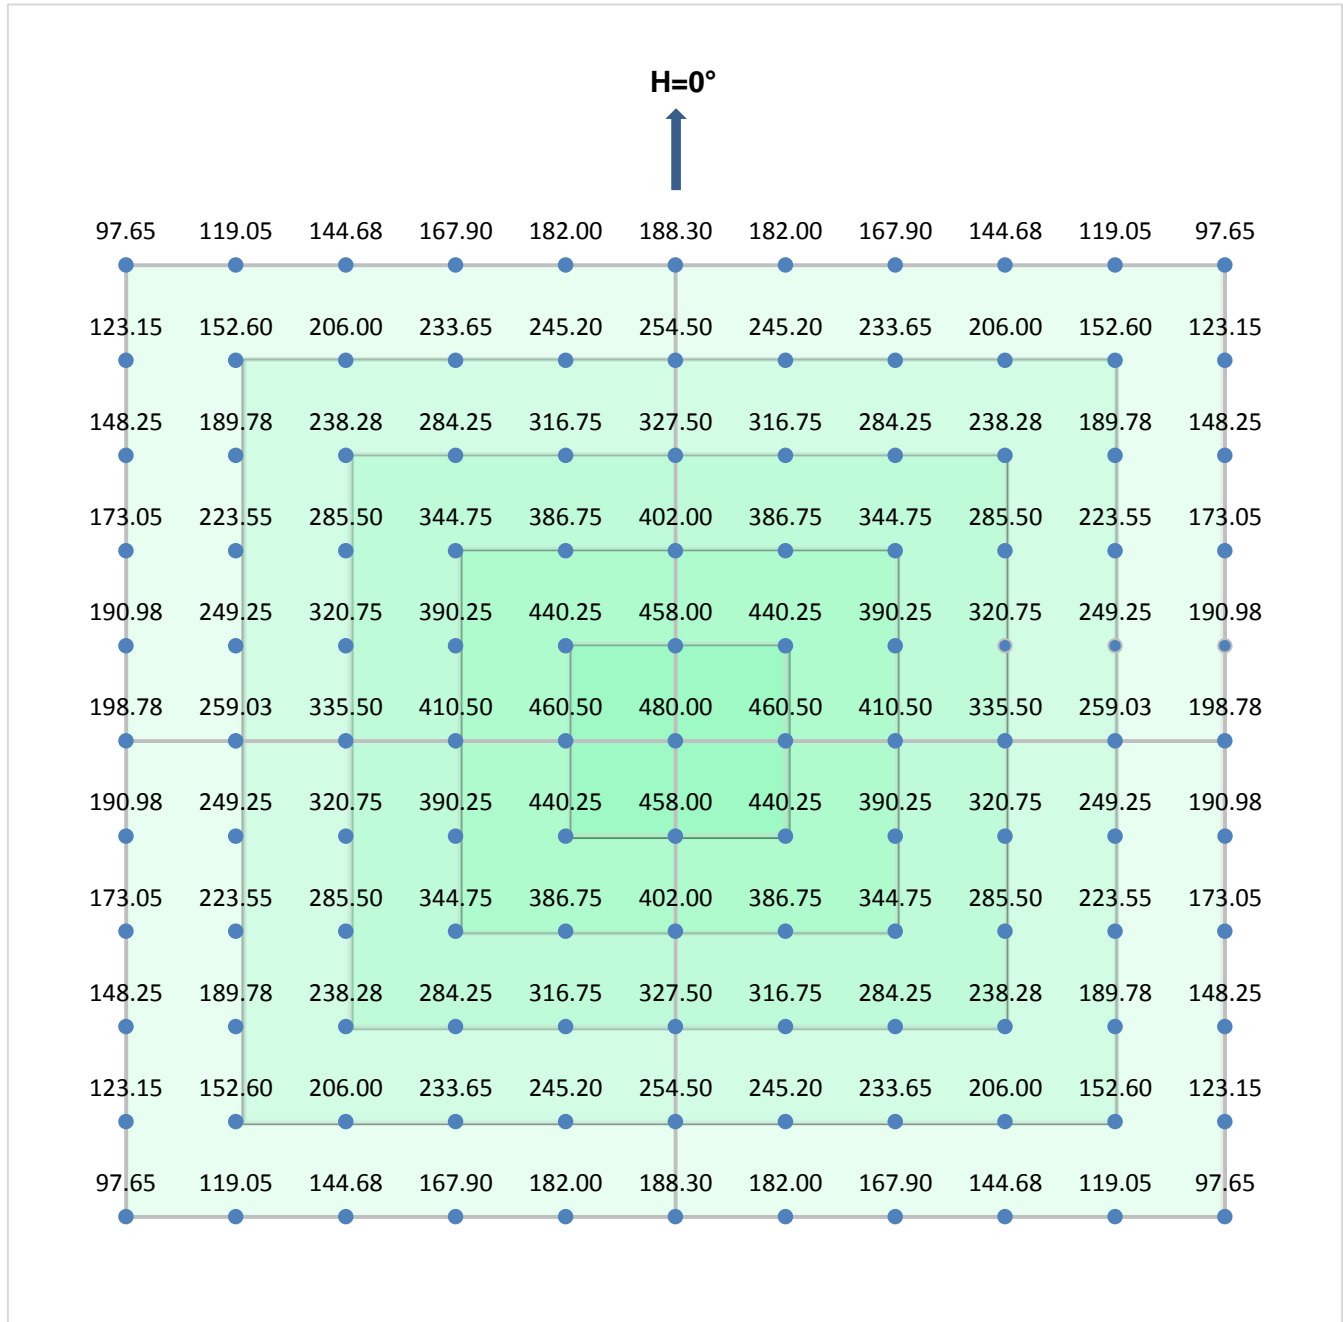



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L072011802G



Test Methods

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Reviewed by:

Steve Kang
Quality Assurance