

# KAKA Industrial®

## Unpacking

The ROTARY METAL SHEAR is shipped from the manufacturer in a carefully packed Carton box. Thoroughly inspect the product upon opening the package.

After unpacking the unit, carefully inspect for any damage that may have occurred during transit. Check for loose, missing, or damaged parts. Shipping damage claims must be filed with the carrier and are the responsibility of the user.

## Specifications

The KAKA ROTARY METAL SHEAR is the perfect addition to any fabricators work bench. It is precision designed and manufactured to allow for quick and easy trimming of sheet metal pieces and the rotary design allows for both straight and curved cuts. Hardened, round, cutting dies produce clean, burr-free cuts in aluminum, steel and other mild metals.



Stock No. ....172501  
 Model.....MMS-2  
 Max. Capacity.....20 Ga. (1.0 mm)  
 Packing size.....8"x7"x10" (19X18X24 cm)  
 N.W./G.W.....17/20 lbs (8/9 kg)

## Important

Blades are coated with a protectant. To ensure proper fit and operation, remove coating. Coating is easily removed with mild solvents, such as mineral spirits, and a soft

cloth. Avoid getting cleaning solution on paint or any of the rubber or plastic parts. Solvents may deteriorate these finishes. Use soap and water on paint, plastic or rubber components. After cleaning, cover all exposed surfaces with a light coating of oil.

**▲ WARNING**  
*Never use highly volatile solvents.  
 Non-flammable solvents are recommended to avoid possible fire hazard.*

## SAVE THESE INSTRUCTIONS

Thank you for purchasing our MMS-2 ROTARY METAL SHEAR machine. Before attempting to operate your new tool please read these instructions thoroughly. You will need these instructions for the safety warnings, precautions, assembly, operation, maintenance procedures, parts list and diagrams. Keep your invoice number with these instructions. Write the invoice number on the inside of front cover. Keep the instructions and invoice in a safe, dry place for future reference.

## General Safety Information

**▲ CAUTION**  
*Always follow proper operating procedures as defined in this manual even if you are familiar with use of this or similar tools.  
 Remember that being careless for even a fraction of a second can result in severe personal injury.*

## SAFETY RULES

1. Wear proper apparel. Do not wear loose clothing, gloves, neckties, rings, bracelets or

# Model MMS-2

other jewelry which may get caught in moving parts of machine.

2. Wear protective hair covering to contain long hair.
3. Wear safety shoes with non-slip soles.
4. Wear safety glasses complying with United States ANSI Z87.1.  
Everyday glasses have only impact resistant lenses. They are NOT safety glasses.
5. Be alert and think clearly. Never operate tools when tired, intoxicated or when taking medications that cause drowsiness.
6. Keep work area clean. Cluttered work areas invite accidents.
7. Work area should be properly lit.
8. Keep visitors at a safe distance from work area.
9. Keep children out of workplace. Make workshop childproof. Use padlocks to prevent any unintentional use of tools.
10. Assemble only according to these instructions. Improper assembly can create hazards.
11. When tools are not in use, store them in a dry, secure place out of the reach of children. Inspect the tools prior to storage and before reuse.
12. Maintain product labels and nameplates. These carry important safety information.

## **⚠ WARNING**

*The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions or situations that could occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be used by the operator.*

## **KNOW HOW TO USE TOOL**

1. Use right tool for job. Do not force tool or attachment to do a job for which it was not designed.
2. Keep hands out of path of shear blades.
3. The Max. shearing thickness of this machine is 20 Ga. (1.0mm) mild steel or equivalent. Exceeding capacity may be dangerous to operator and damage may occur to the machine.
4. Bolt machine to floor or sturdy stand that is bolted to floor to prevent sliding or tipping of machine.

## **⚠ WARNING**

1. *This tool has EXTREMELY SHARP cutting dies which can quickly cause severe injury or loss of fingers! Keep fingers and hands away from moving parts when operating.*
2. *Wear thick, well fitting work gloves to prevent cuts from handling sharp metal.*
3. *Frequently inspect cutting dies. If cracks or chips develop, discontinue tool use immediately.*
4. *Always place the handle in the down position. The weight of the handle left in the up position can cause the upper die to suddenly and unexpectedly rotate with great force resulting in severe injury or loss of fingers.*

## **Assembly**

### **⚠ CAUTION**

*Always keep the handle removed from the tool when not cutting. The weight of the handle can cause the upper die to suddenly and unexpectedly rotate.*

Place the Shear on a clean, level surface at a

# KAKA Industrial®

comfortable working height. Mount securely to the work surface using 2 suitable lag screws or bolts (not included) through the two holes in the steel base #9 (Figure 1).



Figure 1

## Cut Layout

For best accuracy it is recommended that you coat the cut area with layout fluid or a marker and then scribe your cut line rather than using a marker (Figure 2). The width of the scribe line will be much smaller and will provide a precise guide when compared to the wide marker line.

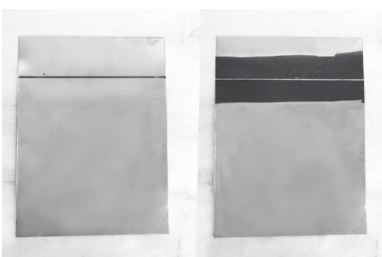


Figure 2

## Operation

**⚠ CAUTION**  
*The cutting dies are extremely sharp! Use extreme care when operating to avoid severe cuts or loss of fingers!*

1. Install ratcheting handle so that the upper

die rotates when you pull the handle towards yourself.

2. Apply moderate pressure to push the metal into the cutting dies #10 & #19 as you pull the handle #1 towards you (Figure 3).

3. To ratchet the handle simply rotate the handle away from you. The handle has an internal ratcheting mechanism that will re-engage automatically.

4. To make a curved cut, rotate the metal while it is fed into the dies.

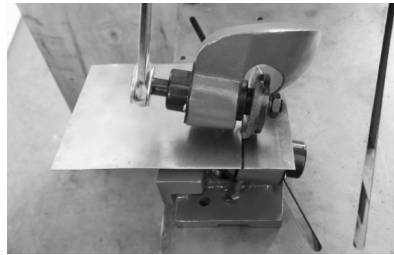


Figure 3

**NOTE:** *The Rotary Metal Shear creates its trim, the unwanted cut piece, on the right. When cutting a curve make sure the unwanted portion is to the right of the upper die (Figure 4).*

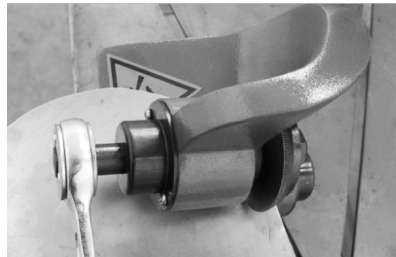


Figure 4

**NOTE:** *The Cutting Dies have been adjusted by the factory for optimal cutting performance. Do not attempt to adjust dies as improper overlap can cause reduced performance and Cutting Die failure.*

# Model MMS-2

## Maintenance


1. Remove handle to ensure that it cannot engage the upper cutting die in storage.
2. Apply a thin film of light oil or rust-preventive coating to all bare steel areas.
3. Store in a clean, dust-free, dry, dampness free area preferably covered with plastic sheeting.
4. Maintenance should be performed before each use.
5. Check tightness of all hardware.
6. Check operation for binding. Lubricate Pivot Points and Dies periodically with a medium bodied lubricating oil.

## Troubleshooting Chart

Symptom	Possible Cause(s)	Corrective Action
Machine will not Cut	1. Incorrect Handle Orientation	Ensure that the Upper Die is turning as you pull the handle towards you. If it is not, remove handle and re-install in the opposite orientation.
	2.Tool Body Has Flexed and Cutting Dies are on Top of One Another	Remove the Hex Nut fastening the Upper Cutting Die, remove Die and re-install in the correct configuration. Cutting edges should be beside one another.
	3.Upper Die is Spinning Freely	Moderate pressure is required to feed the metal into the Dies.

# KAKA Industrial®

## Drawing

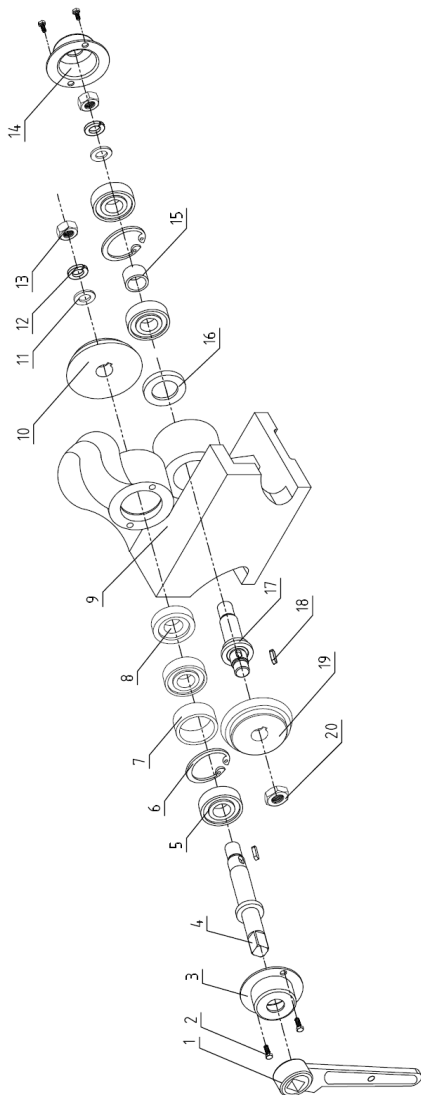

# Model MMS-2

## Parts List

Ref.No.	Description	QTY
1	Ratcheting handle	1
2	Bolt M5 x 8	4
3	Guard cap	1
4	Upper shaft	1
5	Bearing	4
6	Ring 40	2
7	Upper spacer bush	1
8	Adjustable bush	1
9	Base	1
10	Upper die	1
11	Washer 14	2
12	Washer 14	2
13	Nut M14	2
14	Guard cap	1
15	Lower spacer bush	1
16	Pad	1
17	Lower shaft	1
18	Flat key 5 x 10	2
19	Lower die	1
20	Nut M14	1

# **SERVICE RECORD**

KAKA Industrial®

Date	Maintenance performed	Repair components require

## **NOTES**

---

---

---

---

---

---

---

---

---

---

---

Stock No: 172501  
Edition 1 09/2018  
Copyright © 2018 KAKA



---

If you have any questions about the use of this product, please contact the nearest one to you as below:

KAKA INDUSTRIAL LLC  
Mail:  
info@kakaindustrial.com  
Add: 4200 Steve Reynolds  
Blvd Ste 6 Norcross,  
GA 30093  
U.S.A.

KAKA INDUSTRIAL LTD  
Mail:  
echo@kakaindustrial.com  
Add: 3143 Underhill Avenue  
Burnaby,  
B.C V5A3C8  
Canada

KANG INDUSTRIAL PTY LTD  
Mail:  
kang@kakaindustrial.com  
Add: 3 Wayne Court  
Dandenong,  
VIC 3175  
Australia