


SILLOSOCK SENTRY DECOY ASSEMBLY

The first step is to locate the 2 holes on the top of the soft plastic head. Insert the straight end of the stake in the hole closest to the bill. Pull the stake all the way down until the end of the U goes into the other hole on the head. See picture.



The next step is to insert the head with the stake attached onto the body. Note the position of the stake in the picture. Slightly heat the tip on an open flame and push the stake through the corrugated body. Let the stake cool and put the stake from the bottom and push on the top of the stake to get the head in the desired position.

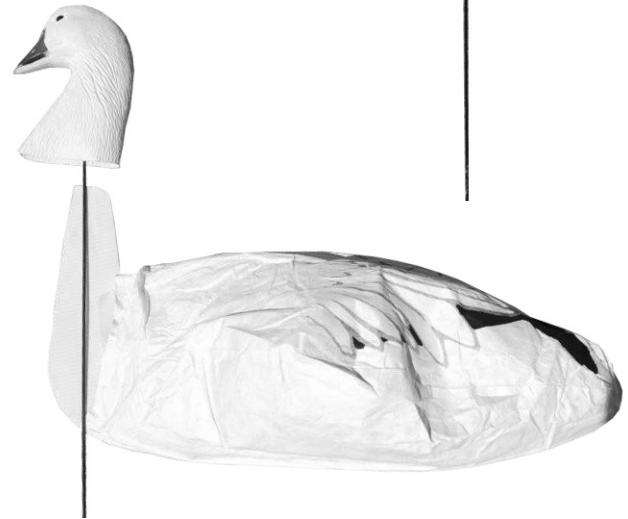

Our unique head attachment allows you to rotate the head left and right to any position for hunting. For storage, your sentry decoy will pack better if the head is straight forward.

Note: If you want to paint the top of your stake, do that before you assemble the decoy.

