
ThinTanks 1000 LITRE (260 GALLONS) INSTALLATION INSTRUCTIONS

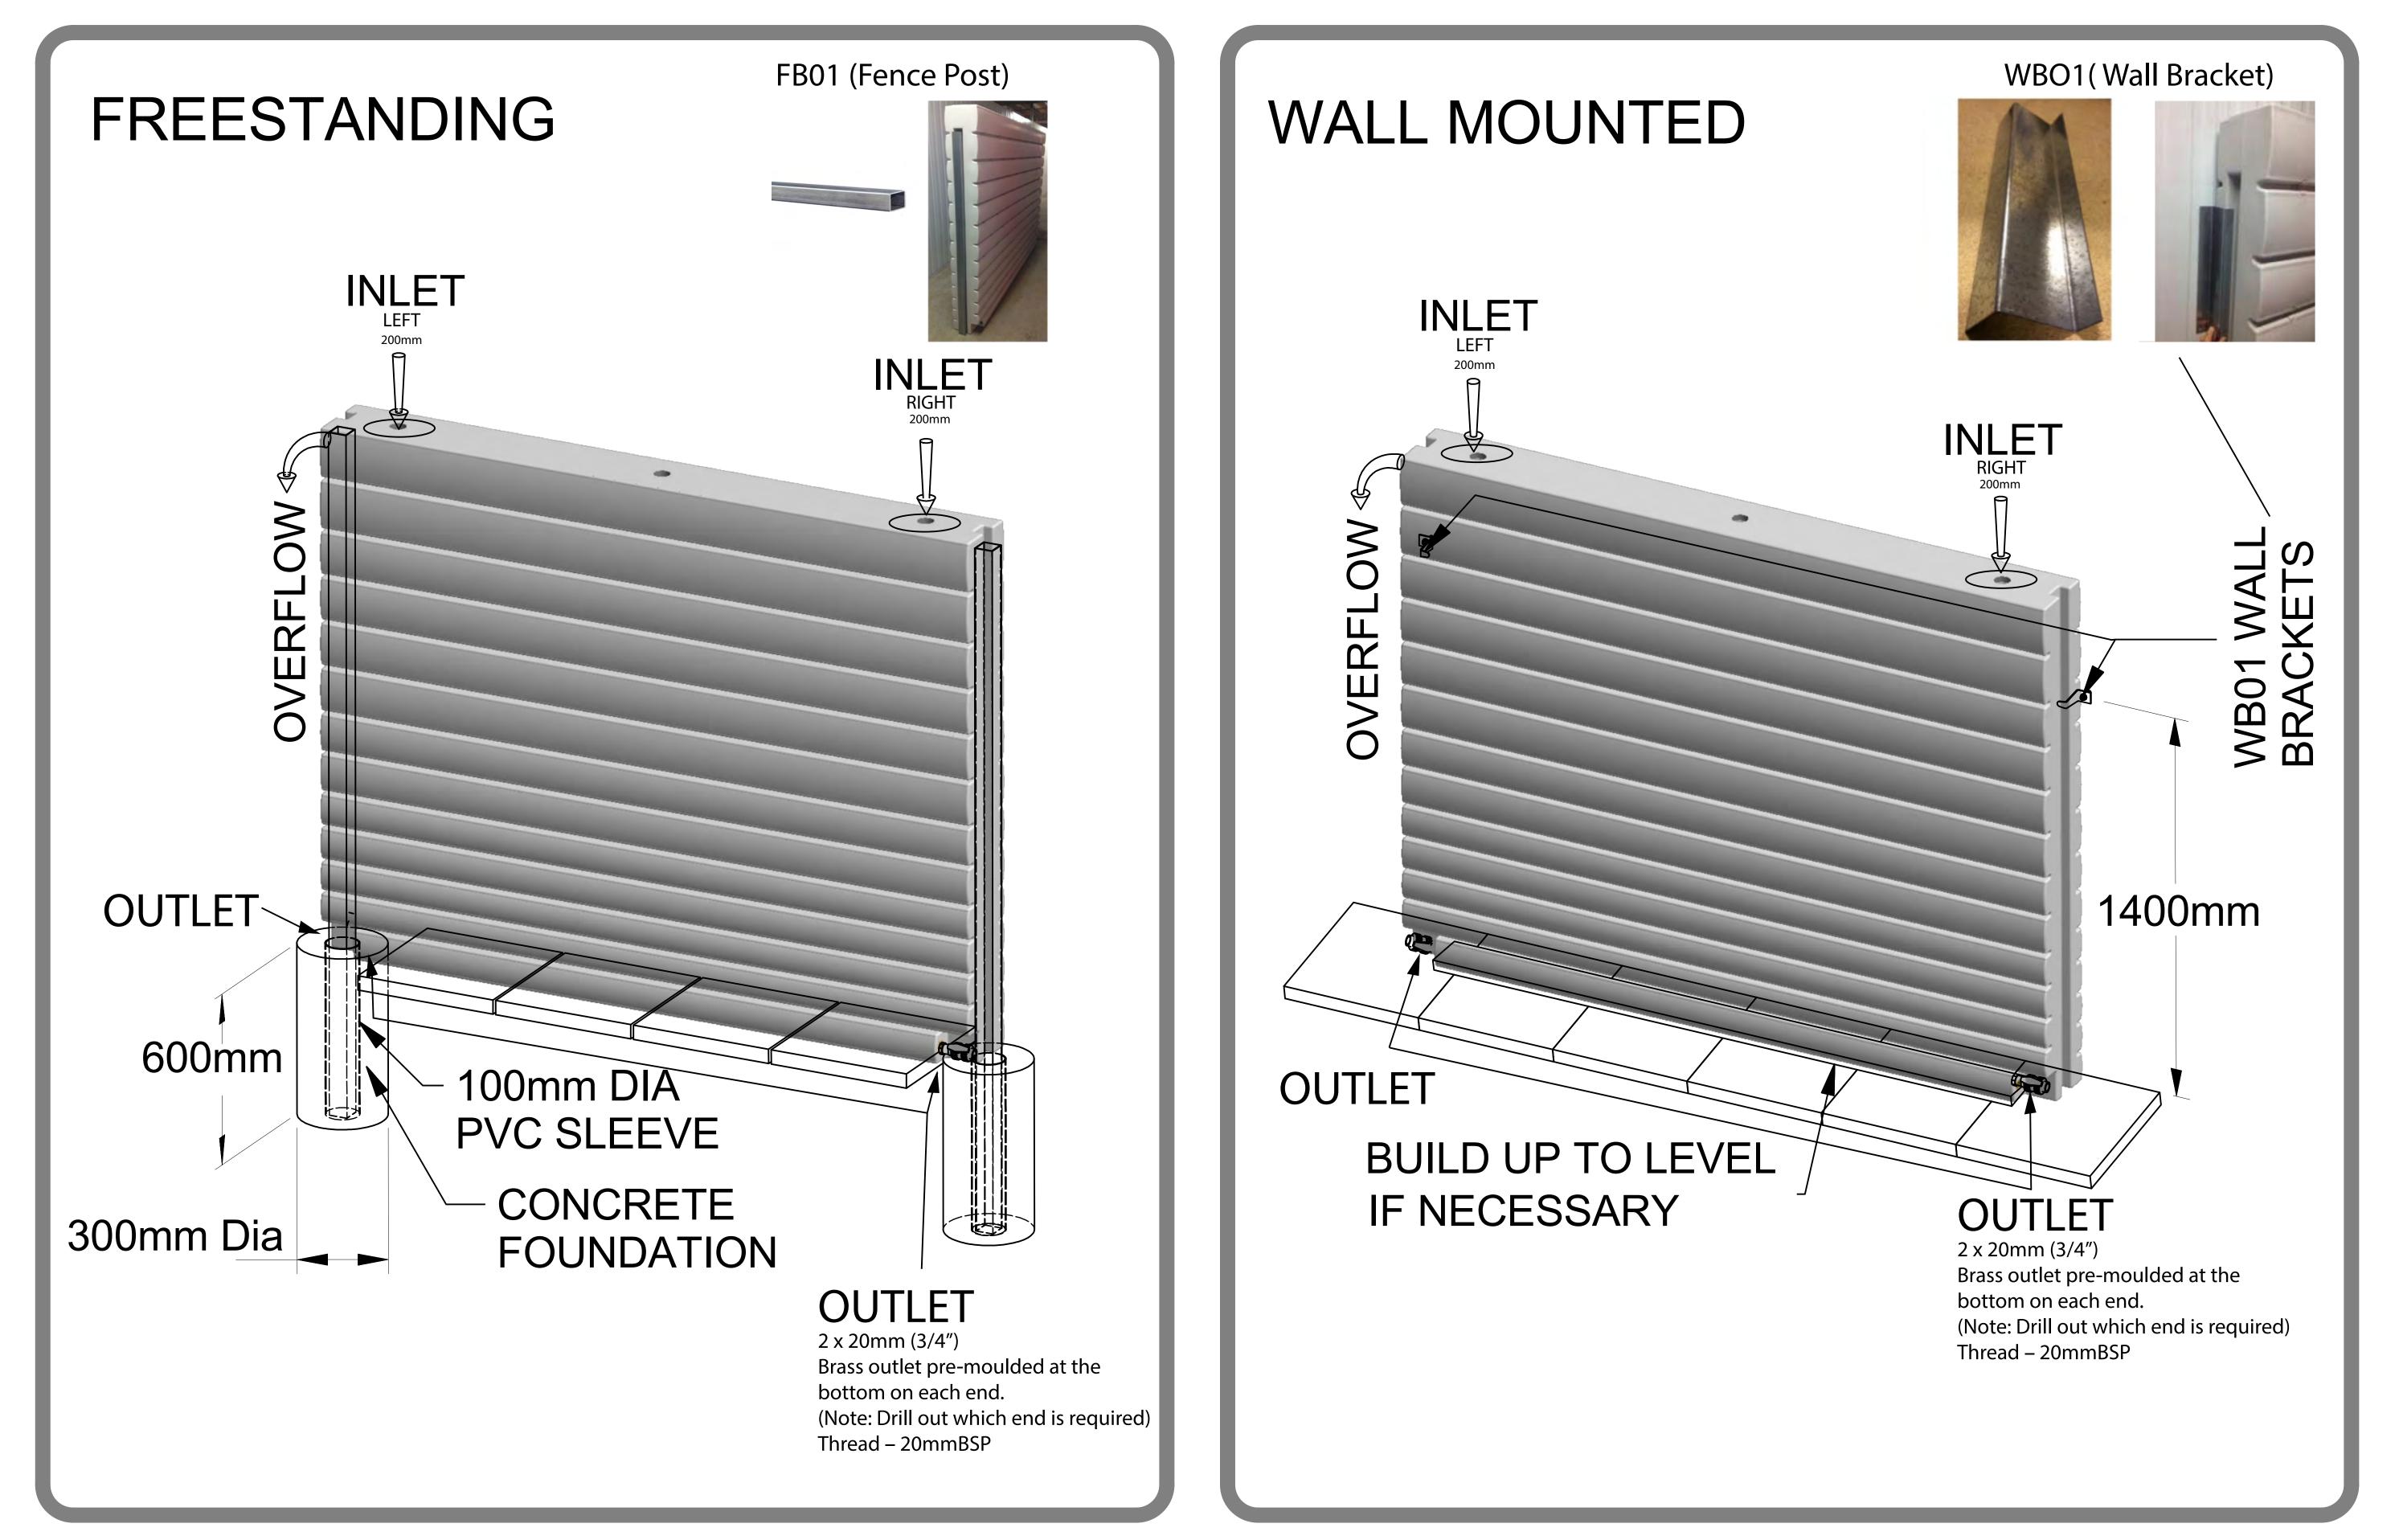

THINTANK INSTALLATION.

It is important for tanks to stand on a solid base, that will not settle or move when wet.

The tanks(s) can be laid on sloping ground, along the length of the tank.

Surface must be horizontal across the width of the tank to allow the sides of the tank to be vertical.

1000 Litre Tank - Freestanding

- Mark position of support poles and excavate holes for 65mm x 65mm x 2400 long posts (CO1.1.).
- Holes to be 300mm in diameter and 600mm deep. Caution: This size may not be large enough in sandy areas. Seek advice from local fencing contractor or a civil engineer.
- Lay concrete pavers beween holes.
- Position 100mm PVC sleeves and concrete

1000 Litre Tank - Wall Mounted

- On an existing pavement, sloping away from a fence or wall, the surface must be built up to ensure the tank face is vertical and the back of the tank is flush against the fence or wall. See diagram.
- Position first tank on prepared base and fix to fence or wall using bracket WB01 (pictured above) on each end. Wall brackets need to be fixed to wall using Dyna Bolts on both ends of the brackets.
- Place brackets approximately 1400mm above base.

around outside of sleeves and up to paver.

 After concrete has set, position tank on pavers and position the posts. Concrete around posts. See diagram. Brackets are required to ensure

tank(s) cannot be accidentally pulled over by human

effort.

<u>WARRANTY</u> ThinTanks warrants its tanks by a pro rata warranty for 10 years from the original date of purchase. This warranty covers the original purchaser only and is not transferable. ThinTanks will repair or replace, at its discretion the tank affected by a defect caused by the manufacturing process or materials. Fading or colour change, damage caused by accidents or misuse, do-it-yourself repairs or incorrect installation, and any subsequent costs (including freight of replacement tank) are not covered by warranty.