

# JET-G1

Stainless steel self-priming  
 JET Pump






## Application

The filling of drinking water, Well pumping, Farming drainage and irrigation, Garden irrigation and spray, Drinkable water supplying, Water feeding and drainage for breed industry.

## Feature

- Clean. Impeller, diffuser and injection pipe adopts the PPO reinforced plastics. Pump body adopts 304 stainless steel. the pump can transport clean water, does not produce secondary pollution,
- Standard and high efficient motor. Low temperature rise, wide operating voltage range, in 180-240 voltage can normally operate. Motor power is truly marked, high efficiency, and it's about 5% higher than general brand. the Thermal protector is sensata (American brand, global leader in the design and manufacture of protectors), and service life is three times more than general brand
- Material upgrade. The key components are international brand, pump body and connector is electrophoresis and anti-rust treatment, stainless steel welding shaft, which is anti-corrosion and long service life.
- Good protective performance. The upper and lower cover of junction box is stamped with the rubber gasket, cable has cable sheath, conform to the requirements of the GS certification.

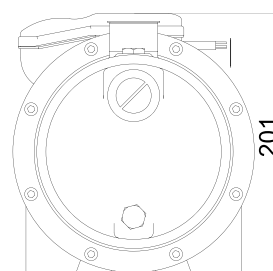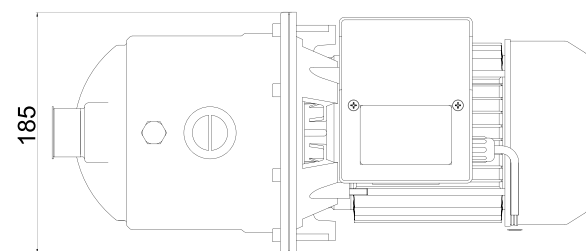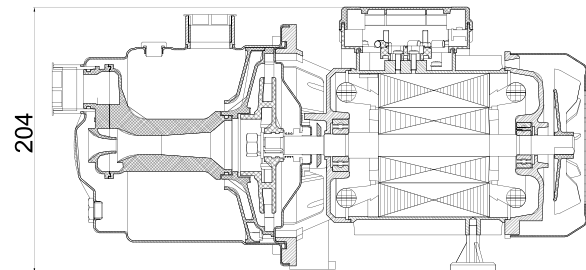

## Technology data

Model	Max.Flow (m <sup>3</sup> /h)	Max.Head (m)	Rated. Power (KW)	Rated. Voltage (V)	Rated. Speed (r/min)	Max. Suct (m)	necessary NPSH(m)	The lift range of use(m)	pipe diameter (mm)
JET370G1	3.6	32	0.37	220	2850	8	3.8	the full head range	25
JET550G1	4.2	35	0.55			9	3.8	the full head range	25
JET750G1	5.1	40	0.75			9	3.8	the full head range	25
JET1100G1	6	48	1.1			9	3.8	the full head range	25

## Performance Curve

JET-G1

50HZ

