




## Olympus Flat


### TOP:

Top design	One-piece upholstered top, rounded corners, three-layer foam
Foam	3" triple-wrap
Upholstered top	30" width x 73" length x 6" total thickness of top + frame
Leg frame	20.5" width x 56.5" length x 5" thickness




### BASE:

Outside leg spacing	26" width x 56" length
Inside leg spacing	21" width x 51" length
Base materials	Maple legs with 3/4" veneer/plywood frame
Motorized lift	Two, powder-coated carbon steel lift arms
Adjustable leg extension	1/4" leg bolts w/ 2 knobs, 11 holes, felt spacers, 2 rubber bumpers per leg
Height range	19" to 41" Double adjustable: 10" manual (ext. legs) plus 12" electric lift
Leg recess	4" recess on sides, 12" recess from head section



### MOTORS & CONTROLS:

Lift mechanism	24V DC Linear actuator with AC control box / transformer, UL recognized
Power consumption	4 to 5 amps
Control	Foot pedal; 2nd foot pedal w/ Y-cable available
220-volt model (international)	Optional
Lifting weight	Lifting weight capacity 350 lbs.
Weight capacity	Static weight capacity 500 lbs.

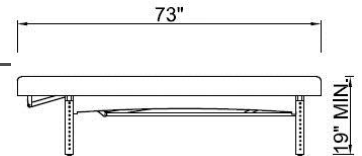

### VINYL:

UltraSoft-Touch	Lightly textured, super-soft PU vinyl, fabric backed
Vinyl colors	Almond, White, Black or Camel


### OPTIONAL ACCESSORIES:

Face support	Contour FaceSpace for prone massage (sold separately)
Foot extension	Salon Footrest or Full Footrest

### GUARANTEES:

Structure	5 yrs. on replacement parts and 1 yr. on labor**
Vinyl & foam	2 yrs. on materials
Mechanical/electrical	2 yrs. on materials
Optional wood shelf	1 yr. on materials

\*\*Labor warranty for customers in USA only

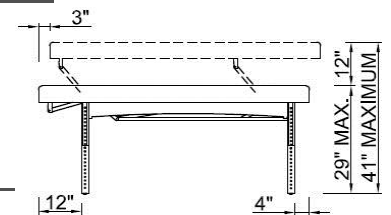

### WEIGHTS:

Weight	125 lbs.
Shipping weight	175 lbs.