

SAFETY INFORMATION

Released Date: 2024-08-22

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.

TOOLS REQUIRED

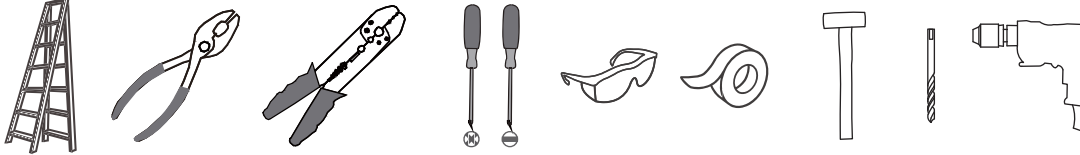


Ratings	120~277Vac, 60Hz	
	Model No.	Wattage
	UQL6290	40W
	UQL6291	40W


CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.


PACKAGE CONTENTS

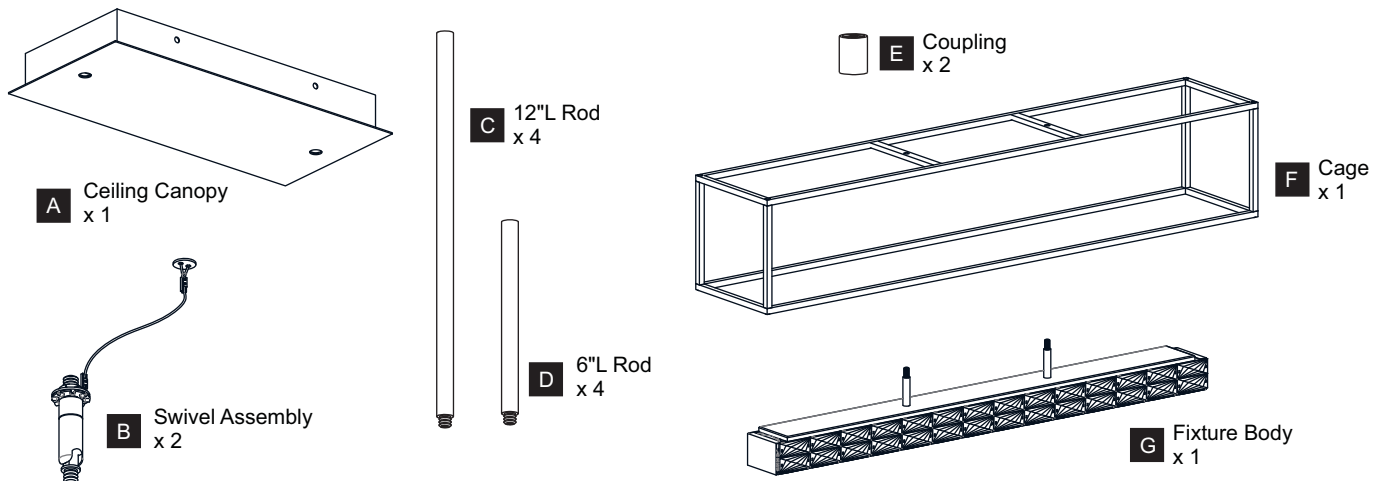

MOUNTING HARDWARE

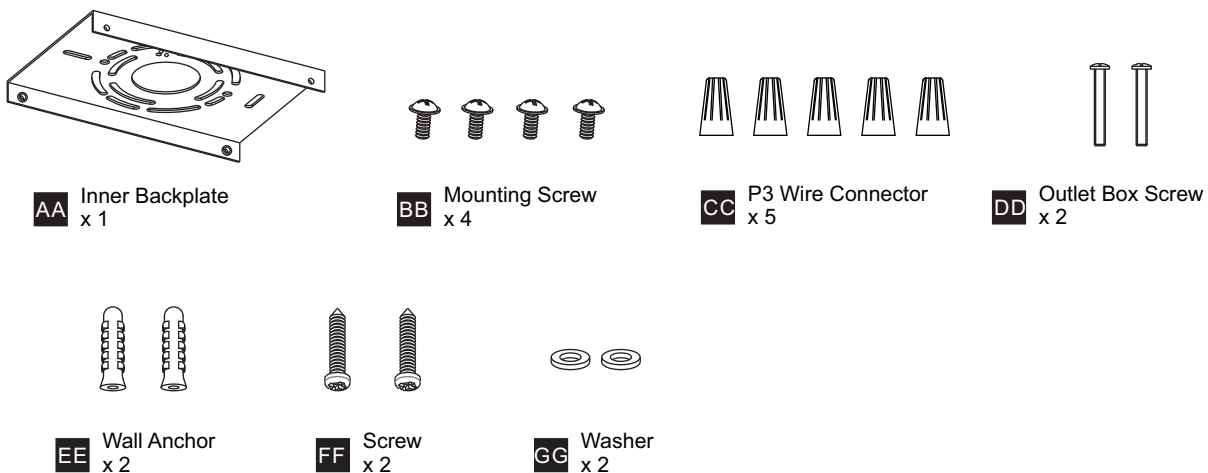


1 Install Fixture Body to Cage

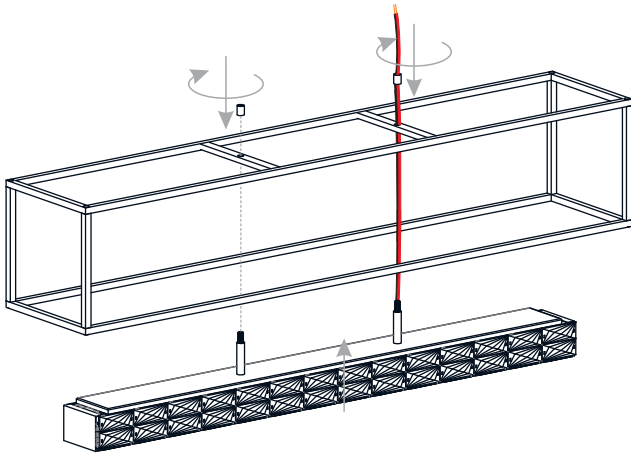


2 Install Rods

Optional Rods:



8 Feet Ceiling:
(2) 12"L Rods each side.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L
Rods each side.

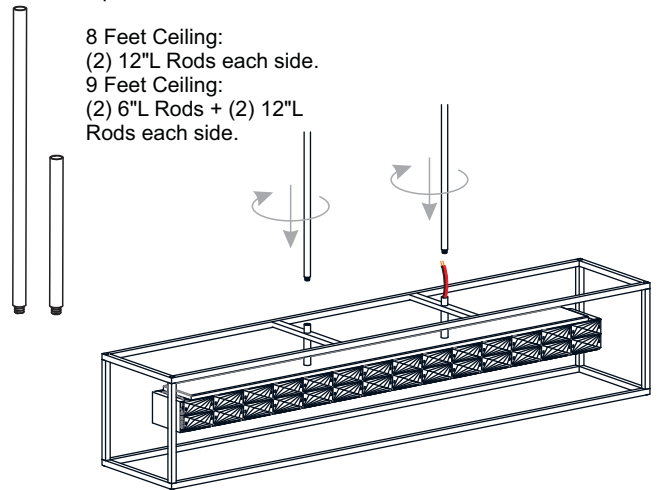

3 Separate Swivel Assembly

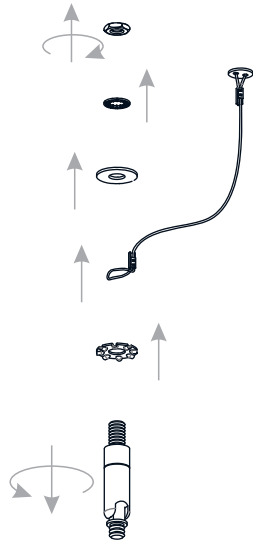


4 Install Swivels and Ceiling Canopy to Upper Rods

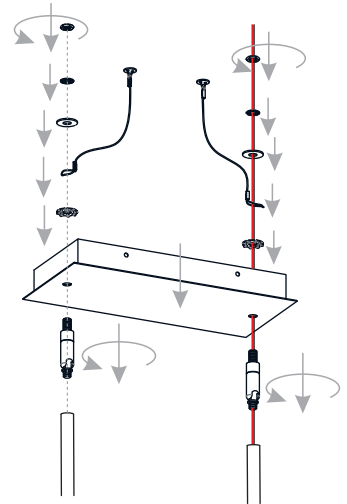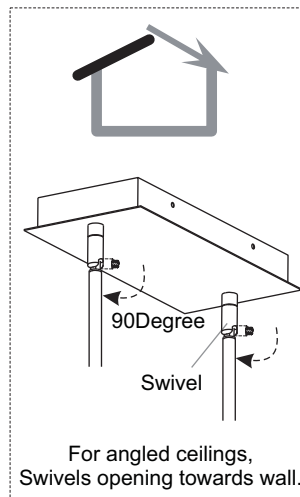


* Make sure two swivels
opening are in the same
direction while assembling.

5 Connect Fixture Wires to Driver

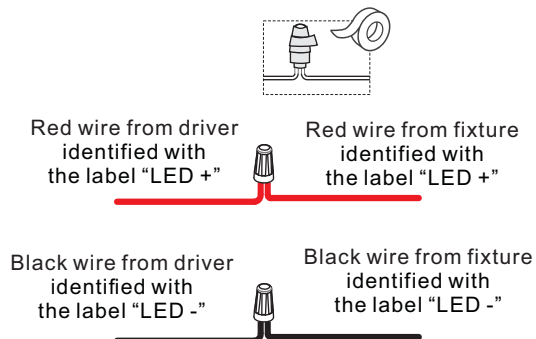


6 Install Inner Backplate

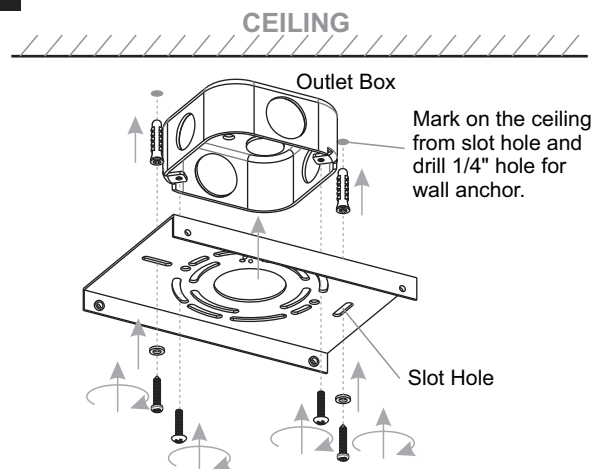


INSTALLATION


7 Install Lanyards

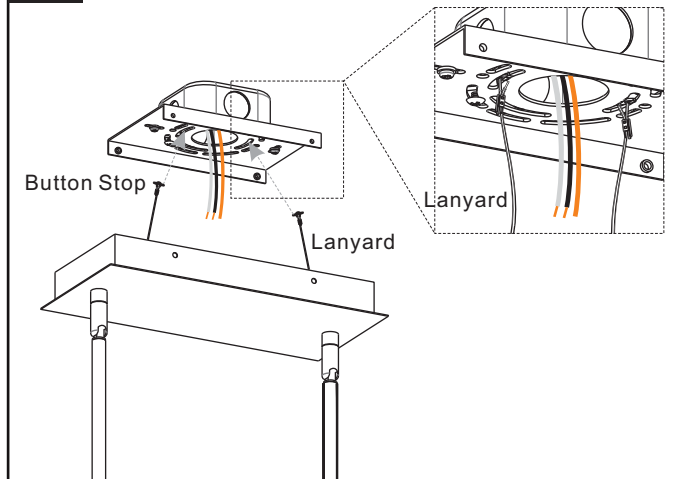

8 Wiring

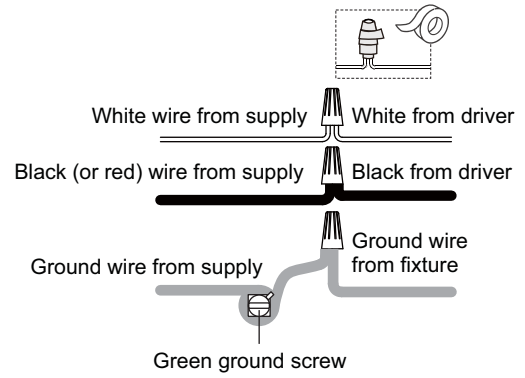

9 Install Ceiling Canopy to Inner Backplate

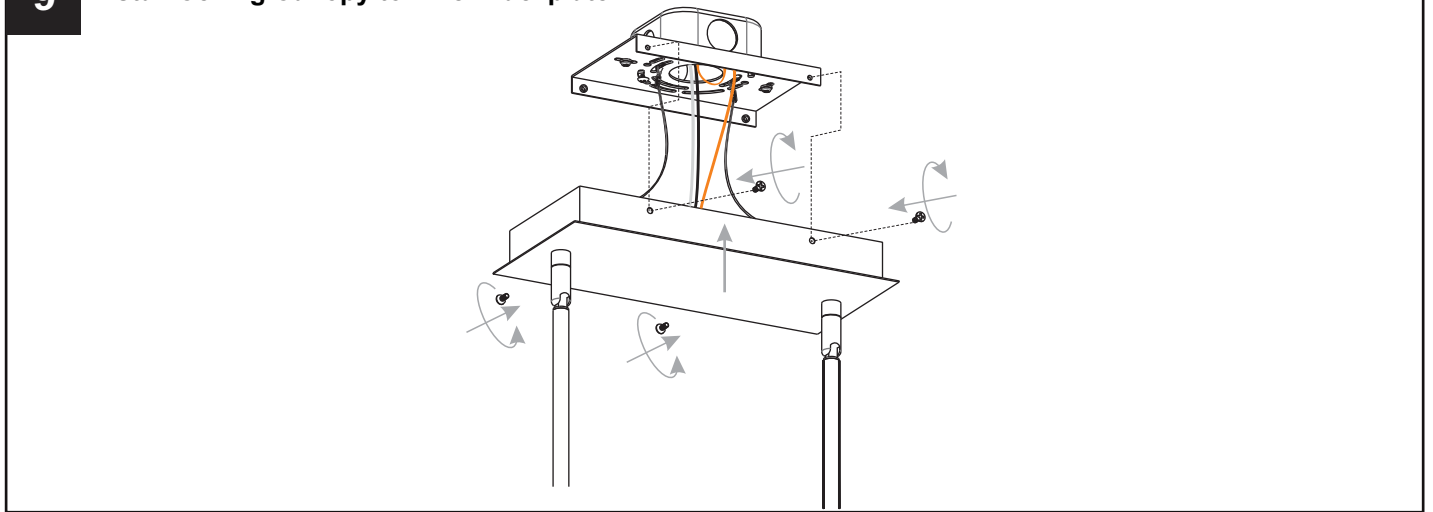

Your installation is now complete! Restore electricity and save this sheet for future reference.



Questions?

Call our Customer Care Team at 1-855-303-4229

urban ambiance

www.urbanambiance.com