

SAFETY INFORMATION


Released Date: 2024-08-19

Please read and understand this entire manual before attempting to assemble, install or operate the product.

WARNING


- **RISK OF ELECTRIC SHOCK** - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- **CAUTION**
- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- **TOOLS REQUIRED**

Ratings	120-277Vac, 60Hz	
	Model No.	Wattage
	UQL6379	25W

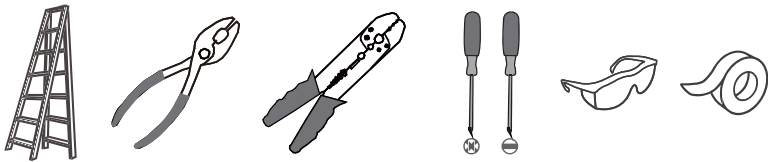


CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

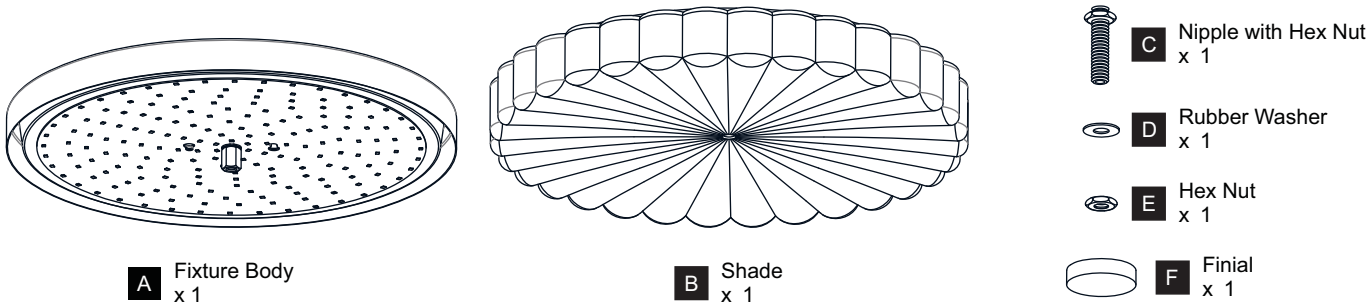


MOUNTING HARDWARE

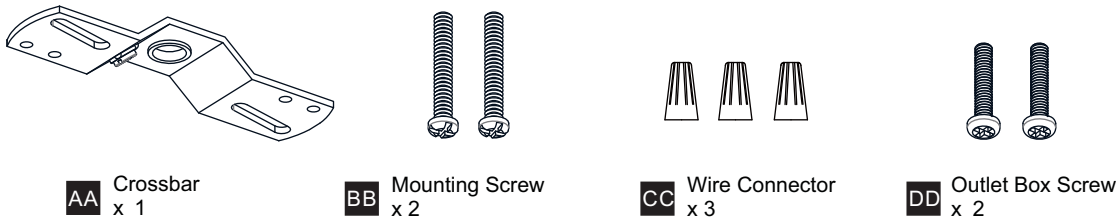


INSTALLATION

1 Adjust Color Temperature


To adjust the color temperature among 3000K-4000K-5000K by using the DIP switch on the side of the LED driver.

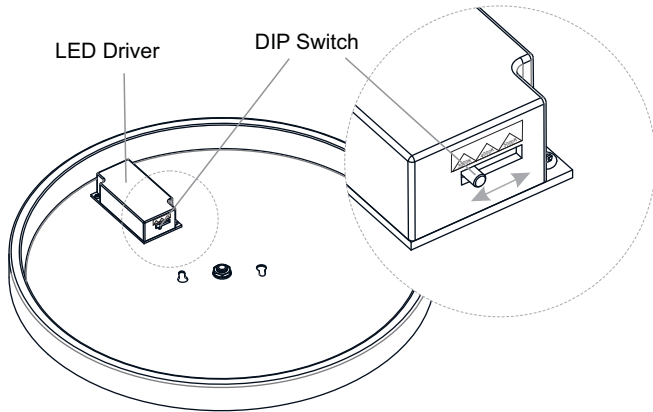


2 Install Nipple

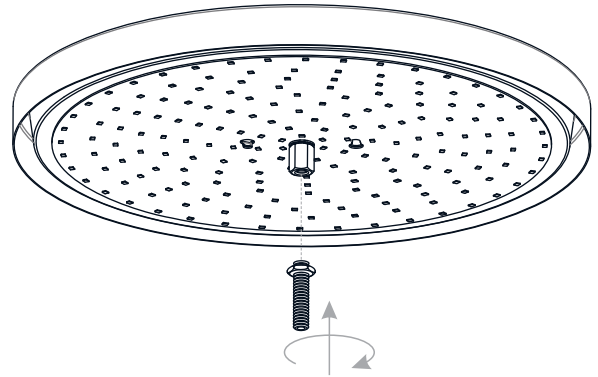


3 Install Crossbar

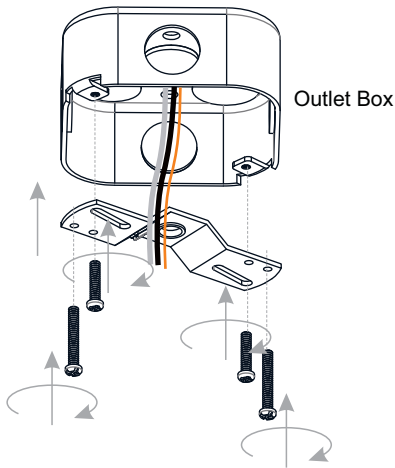


4 Wiring

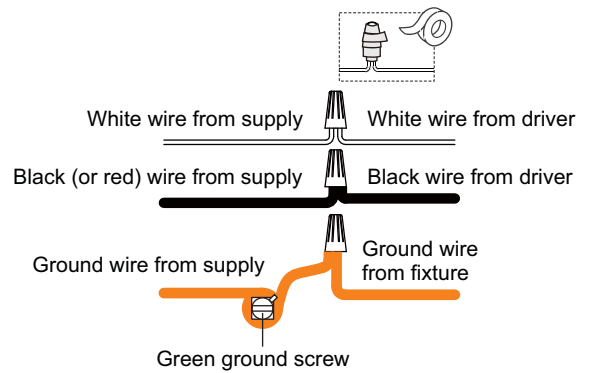

5 Install Fixture Body to Crossbar

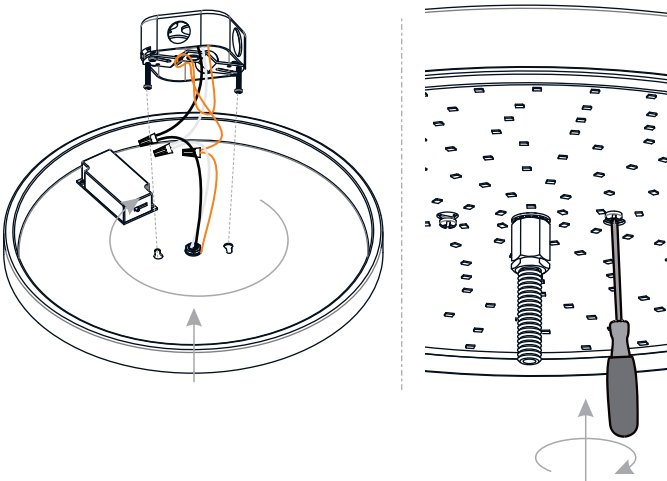

6 Install Shade

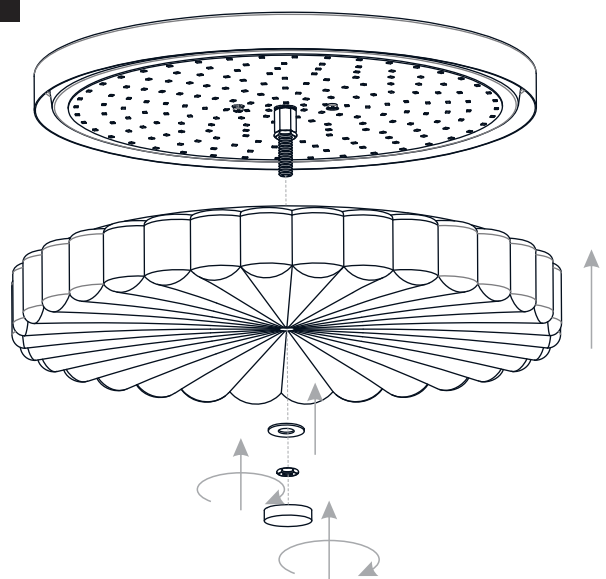

Your installation is now complete! Restore electricity and save this sheet for future reference.



Questions?

Call our Customer Care Team at 1-855-303-4229

urban ambiance
www.urbanambiance.com