

imagePROGRAF iPF670E


VERSATILE, ECONOMICAL LARGE-FORMAT PRINTING



TECHNICAL/POSTERS LARGE-FORMAT PRINTING



SPECIFICATIONS

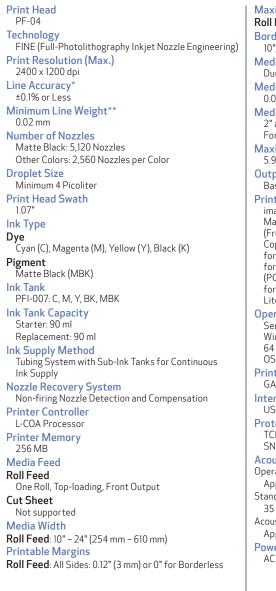

Maximum Print Length (Single Page)[†] Roll Feed: 59' (18 m) Borderless Printing Widths (Roll Media Only) 10", B4, A3, 14", A2, 17", B2, A1, 24" Media Cutter Durable Dual-blade Rotary Cutter Media Thickness 0.07 - 0.8 mm (2.8 - 31.4 mil) **Media Core Sizes** 2" and 3" Core (3" Core Adapter Not Included; For 3" Cores, must buy Roll Holder Set RH2-26) Maximum Roll Outer Diameter 5.9" (150 mm) Output Media Bin Basket Printing Software^{††} imagePROGRAF Printer Driver for Windows®/ Mac, Printer Driver Extra Kit for Windows/Mac (Free Layout, Color imageRUNNER® Enlargement Copy (PC Only), Advanced Preview), Print Plug-in for Microsoft Office (PC only), Optimized Module for AutoCAD® for Windows, Direct Print & Share (PC Only), Status Monitor for Windows, PrintMonitor for Mac, Media Configuration Tool, PosterArtist Lite for Windows Operating System^{*} Server 2008 (32/64 bit), Server 2012 (64 bit), Windows Vista® (32/64 bit), Windows 7 (32/ 64 bit), Windows 8.1/10 (32/64 bit), Macintosh OS X 10.7.5 - 10.11X Print Language GARO (Canon Proprietary), HP-GL/2, HP RTL Interface USB 2.0 Hi-Speed, 10/100/1000Base-T/TX Protocol TCP/IP (IPv4/IPv6), SNMP (Canon MIB supported), HTTP Acoustic Noise® Operation Approx. 47 dB Standby 35 dB or Less Acoustic Power Approx. 6.4 Bels Power Supply AC 100-240 V (50-60 Hz)

Power Consumption

Maximum 140 W or Less

Standby

5 W or Less

Power Off 0.5 W or Less (Executive Order Compliant)

Certifications

Electrical Safety Regulations CB Certification

Environmental Certifications ENERGY STAR® (Worldwide) **RoHS** Directive

Operational Environment

Temperature 59 - 86° F (15 - 30° C)

Relative Humidity

10 - 80% (No Condensation)

Printer Dimensions (H x W x D) and Weight with

Stand and Basket

With Stand: 42" x 39" x 34"(ST-26: with basket open) Weight: 113 lb. (ST-26, roll holder included, no inks, no print heads)

Without stand: 20" x 39" x 27" Weight: 92 lb.

Options

PosterArtist Roll Holder Set (RH2-26) Stand (ST-26)

User-Replaceable Items

Ink Tank (PFI-007 MBK, BK, C, M, Y) Print Head (PF-04) Maintenance Cartridge (MC-10)

Line accuracy repeatability is guaranteed after a user performs necessary adjustment and under the same environmental conditions. Applies to media for line drawing (Plain Paper, Coated Paper, CAD Translucent Matte Film, and CAD Tracing Paper) only.

- ** Theoretical value based on data resolution.
- † The maximum printable length varies, depending on the application, OS, and RIP used.
- 11 Printer driver software for Windows 64-bit included in the printer box. All other printer driver versions need to be downloaded from usa.canon.com
- ▲ For imagePROGRAF Printer Driver. For printing from PostScript applications such as Adobe Illustrator or QuarkXPress, please use a PostScript compatible RIP package. For a list of Canon recommended RIP packages, please consult with Canon Alliance and Industry Market program list of RIP vendors at www.usa.canon.com

USA.CANON.COM/LARGEFORMAT



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imagePROGRAF, imageRUNNER, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. Specifications and availability subject to change without notice. Not responsible for typographical errors ©2017 Canon U.S.A., Inc. All rights reserved.



IMPOSSIBLE