


## HOW-TO FOR WINDSCREEN INSTALLATION

### Installing Your Windscreen

1. 9' windscreens are hung from the top of the chain-link fence. The usual fence height is 10', which allows for 1 foot of air space at the bottom. 6' windscreens, if used, are placed in the center of the chain-link fence or 2' from the top.
2. Hang the windscreens so that the seams and hems are toward the fence, leaving the smooth side facing the court.
3. ALL GROMMETS MUST BE USED to secure the windscreens to the fence.
  - First, fasten one vertical edge at the desired height to the fence using regular (50-lb breaking strength) Ty-Rap®.
  - Next, fasten the top of the windscreen to the fence, keeping the top straight by following the chain-link pattern. Use either regular Ty-Rap® or, if the windscreen will be rolled to the top during high winds, snap hooks or heavy-duty 120-lb breaking strength Ty-Rap®.\*
  - Next, fasten the remaining sides of windscreen to the fence with regular Ty-Rap®.
  - Finally, fasten the bottom with regular Ty-Rap® or, if the windscreen will be rolled to the bottom during high winds, with snap hooks or heavy-duty 120-lb breaking strength Ty-Rap®.
4. When anti-billowing center tape is used, fasten it after top and bottom are attached using regular, 50-lb breaking strength Ty-Rap® through each grommet.
5. To prevent damage, when high winds are expected, cut away the regular Ty-Rap® that you have used for the sides, center tape and either the top or the bottom of the windscreen. Then roll the windscreen up or down to where the snap hooks or heavy-duty Ty-Rap® are attached and tie it up using 14"-long Ty-Rap® to help prevent wind damage.
6. In climates that get freezing temperatures, high winds and snow, we recommend that windscreens be taken down for the winter months and rehung in the spring. If windscreens are left on the fences during the winter in these areas, they must be at least rolled up or down and secured.

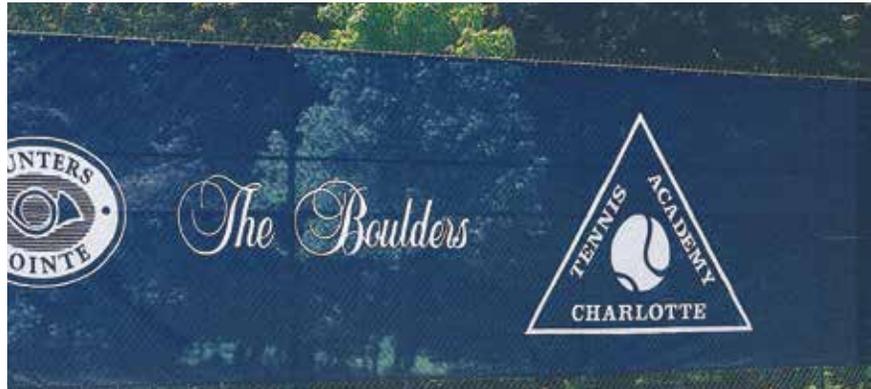

If windscreens are not rolled or removed, all warranties are null and void. There is also a strong chance that the winter winds will cause your cyclone fencing to bend.

\* We recommend using heavy-duty Ty-Rap® or snap hooks to secure either the top or the bottom of the windscreen so that it can be rolled up or down toward this secured end during high winds. We also suggest using our 14"-long Ty-Rap® when securing the rolled-up windscreen to the fence.